



Installation for locking device in stainless steel grating. This is what you need:

1. Gully
2. Stainless steel grating
3. 2 screws
4. 2 locking clips




On the locking clip you can see a small flange, this is locking the grating so make sure to get it secured under the clamping ring. Pictures are just to illustrate how they are secured later in the process.

Put the screws thru marked hole or the hole in the grating, one on each side of the grating. This grating do not have any marked holes, so I have put it in the hole that is closest to the clamping ring.



Then you take to locking clips and screw very loose on to the screw that you just have put thru the grating. Just like the picture below:

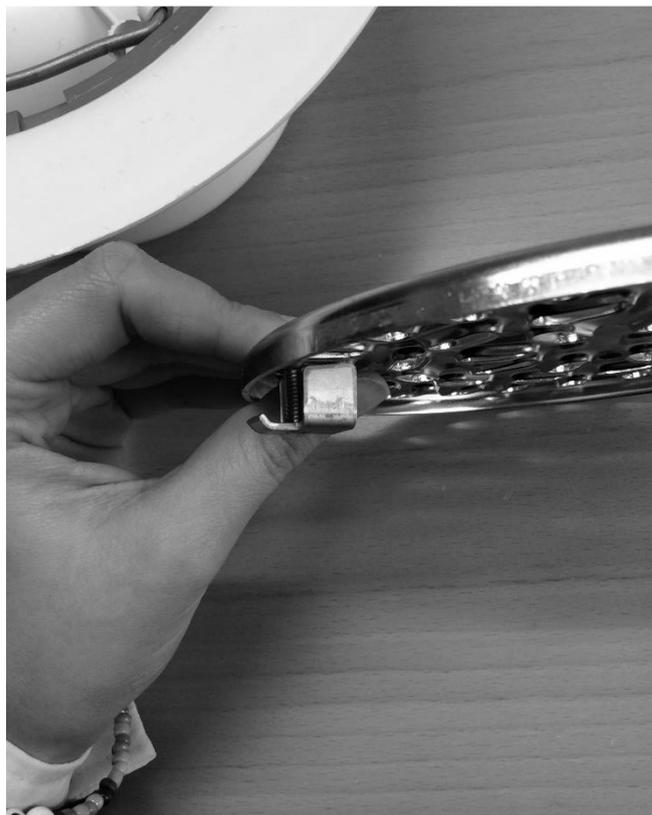

Now – Put the stainless steel gratin in to the gully unit. It will look like this from above.



Look thru the grating, there you can see and make sure that the locking clips are fastened under the clamping ring. Take the screwdriver and turn until the grating is in place. A good tip is to screw gently first on one side then the other side, then the first side again. Then you are ready!

