


# Built-in touchless tap

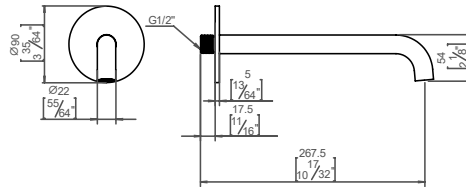

## Qtoo collection

**Product** 250mm built-in infrared touchless tap

**Tender text** QTOO collection, built-in touchless tap. Manufactured in the highest quality marine grade, AISI 316 stainless steel, protecting against high levels of corrosion and securing cleaner drinking and utility water.

**Re-handle®** Re-handle® this product to prolong its life span up to 100 years, lowering the Global Warming potential (CO2) between 54-91% depending on the product.

Re-handle your product here

**Product specification** Spout projection: 250mm (9 27/32")  
 Rose diameter: Ø90mm (3 1/2")  
 Build in depth: 69mm (2 3/4")  
 Spout: preinstalled 5.7 l/min (1,5 gpm) aerator (contact sellers for other options)  
 Comfort time out 2 sec.  
 Security time out 30 sec.  
 Automatic rinse cycle (deactivated)  
 Always secure min. 140mm - 5 1/2" distance from aerator to washbasin waste  
 Use with Flexbox QSF01 and connector QS3400  
 Temperature control in Flexbox  
 Max. work pressure 8 bar  
 Including 920mm - 36 7/32" cable  
 Lead free compliant  
 Material: Marine grade AISI 316 stainless steel  
[20-year warranty \(5 years for coated items\)](#)

### Available finishes



Please note: PVD and powder coated items cannot be Re-handled

**Spare parts/ accessories** QSF01 - Premix Flexbox  
 QS3400 - Built in spout connector

**Mounting** <https://dline.com/mounting-instructions/>

### Product care

d line products are produced in the highest quality marine grade AISI 316 stainless steel. To sustain the unique d line finish please follow the below instructions:

- Wash down the surfaces using soapy water or mild detergent
- Always thoroughly rinse off with clean water
- To complete the cleaning procedure dry/polish the surface with a soft dry cloth

Please do not use scouring powder, steel wool, chloride based detergents or other aggressive cleaning products as these may damage the surface.

If spots or corrosion appear on the surface it is not due to the stainless steel quality, but to impurities in the environment, aggressive conditions or improper or insufficient cleaning.

QST3290 flow rate (without aerator)

