

Sanirain 4

clear water, rain water

Sanirain 4 is an automated rainwater management system for domestic applications. Designed to effectively manage rainwater, it combines ease of use and performance. With its electronic control system, it maintains a constant pressure and is perfectly suitable for small irrigation systems or non-potable water supply.




PERFORMANCES

- Max. Head (Q0) : 40 m
- Max. flow rate : 4 m³/h


PRODUCT BENEFITS

- Delivered with the SaniMHP 4-40
- Quiet operation
- Built-in dry run protection
- Ensures disconnection and continuity of service in case of empty tank (EN 1717)
- Press Control suitable for automatic operation up to a height of 12 m
- Comfort version: measurement and display of water level in the tank by a piezo sensor

CURVE

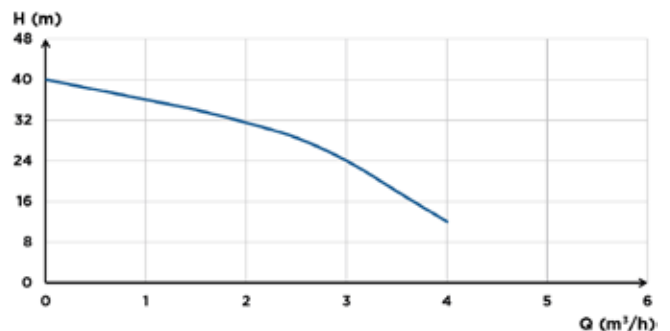

DIMENSIONS

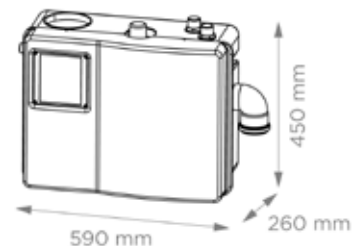

	Sanirain SR 4	Sanirain SR 4 Comfort
Electrical features		
Voltage (V)	230	230
Frequency (Hz)	50	50
Nominal absorbed current (A)	4	4
Power consumption P1 (W)	900	900
Power output P2 (W)	700	700
Revolutions per minute (RPM)	2850	2850
Electrical class	I	I
Length (m)	1,5	1,5
IP Rating	IP55	IP55
Hydraulics		
Max. Head (Q0) (m)	40	40
Max. flow rate (m ³ /h)	4	4
Suction height (m)	8	8
Max. operating pressure (bar)	9	9
Medium	40	40
Discharge diameter G	1	1
Identification and logistics		
Gross weight	28 kg	28 kg
EAN code	3308815100364	3308815100371
Factory code	XSR10002	XSR10003