


Stålkulventiler, reducerat genomlopp

100/S serie, stark, svetsning / svetsning, EN (DIN), DN 65-200, reducerat genomlopp

Ventilhus	DN 65-200 Stål, P235GH (1.0345)
Kula	DN 65-200 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 65-200 PTFE+C
Spindel	DN 65-100 Rostfritt stål, X8CrNiS18-9 (1.4305) DN 125-150 Rostfritt stål, X17CrNi16-2 (1.4057) DN 200 Rostfritt stål, X8CrNiS18-9 (1.4305)
Spindeltätning	DN 65-200 FPM
Manövrering	DN 65-200 Med förzinkat stål handtag

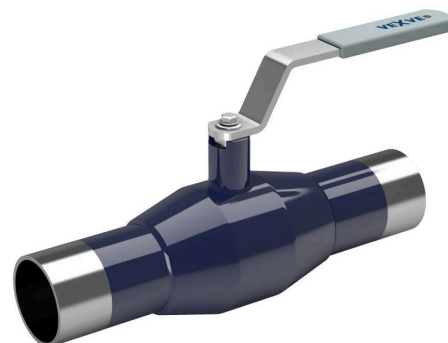


Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

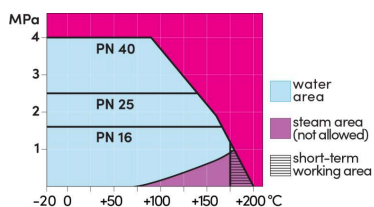


Ej för ånga

DN 65-150

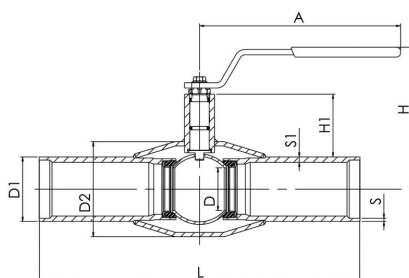

DN 200



DN	PN	Product no.	RSK no.	A	D	D1	D2	H	H1	L	S	S1	kg
65	25	100065/S	4512245	280	50	76.1	101.6	159	62	300	2.9	5	5.0
80	25	100080/S	4512246	280	65	88.9	121.0	171	68	300	3,2	5.6	6.5
100	25	100100/S	4512247	280	80	114.3	139.7	216	101	325	3.6	6.3	10.4
125	25	100125/S	4512248	400	100	139.7	177.8	253	101	325	4	6.3	14.0
150	25	100150/S	4512249	400	125	168.3	219.1	272	107	350	4.1	7.1	22.0
200	25	100200/S	4512250	870	150	219.1	273.0	281	92	400	4.5	7.1	43.0