

# Kondensatventiler, reducerat genomlopp

173 serie, fläns / fläns, DN 15-150, reducerat genomlopp

|                |                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------|
| Ventilhus      | DN 15-150 Stål, P235GH (1.0345)                                                                   |
| Kula           | DN 15-150 Rostfritt stål, X5CrNi18-10 (1.4301)                                                    |
| Kultätning     | DN 15-150 PTFE+GF                                                                                 |
| Spindel        | DN 15-100 Rostfritt stål, X8CrNiS18-9 (1.4305)<br>DN 125-150 Rostfritt stål, X17CrNi16-2 (1.4057) |
| Spindeltätning | DN 15-150 FFKM/EPDM                                                                               |
| Manövrering    | DN 15-150 Med förzinkat stål handtag                                                              |
| Fläns          | EN 1092-1<br>Tillgänglig PN 10, 16, 25, 40                                                        |



## Funktionsvillkor


DN 15-150: -20 °C – +250 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

\*) Ej för överhettad ånga

Läckageklass A (EN 12266-1)

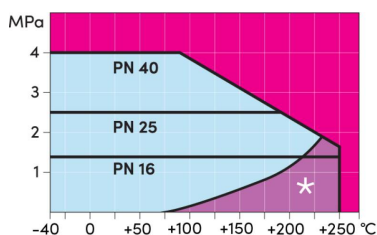

DN 15-250

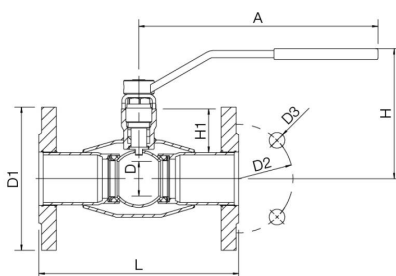

| DN  | PN | Product no. | RSK no. | A   | D   | D1    | D2    | D3   | H   | H1  | L   | kg   |
|-----|----|-------------|---------|-----|-----|-------|-------|------|-----|-----|-----|------|
| 15  | 40 | 173015X     | 5497041 | 147 | 10  | 95.0  | 65.0  | 14.0 | 116 | 33  | 130 | 1.8  |
| 20  | 40 | 173020X     | 5497042 | 147 | 15  | 105.0 | 75.0  | 14.0 | 120 | 34  | 150 | 2.5  |
| 25  | 40 | 173025X     | 5497043 | 147 | 20  | 115.0 | 85.0  | 14.0 | 122 | 33  | 160 | 3.0  |
| 32  | 40 | 173032X     | 5497044 | 147 | 25  | 140.0 | 100.0 | 18.0 | 126 | 32  | 180 | 4.6  |
| 40  | 40 | 173040X     | 5497045 | 147 | 32  | 150.0 | 110.0 | 18.0 | 131 | 34  | 200 | 5.1  |
| 50  | 40 | 173050X     | 5497046 | 147 | 40  | 165.0 | 125.0 | 18.0 | 138 | 35  | 230 | 6.8  |
| 65  | 25 | 173065/25   |         | 278 | 50  | 185.0 | 145.0 | 18.0 | 156 | 62  | 270 | 10.0 |
| 80  | 25 | 173080/25   |         | 278 | 65  | 200.0 | 160.0 | 18.0 | 168 | 68  | 280 | 13.0 |
| 100 | 25 | 173100/25   |         | 278 | 80  | 235.0 | 190.0 | 22.0 | 218 | 101 | 300 | 20.2 |
| 125 | 25 | 173125/25   |         | 400 | 100 | 270.0 | 220.0 | 26.0 | 253 | 101 | 325 | 30.0 |
| 150 | 25 | 173150/25   |         | 600 | 125 | 300.0 | 250.0 | 26.0 | 272 | 107 | 350 | 39.0 |