
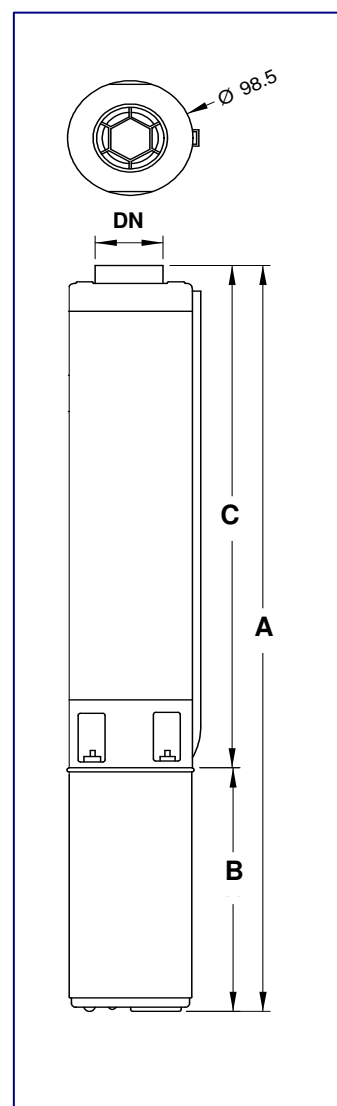


Debe 4" undervattenpump typ GRG

Kapacitetsdiagram vid 2850 rpm

Testad enligt ISO 9906

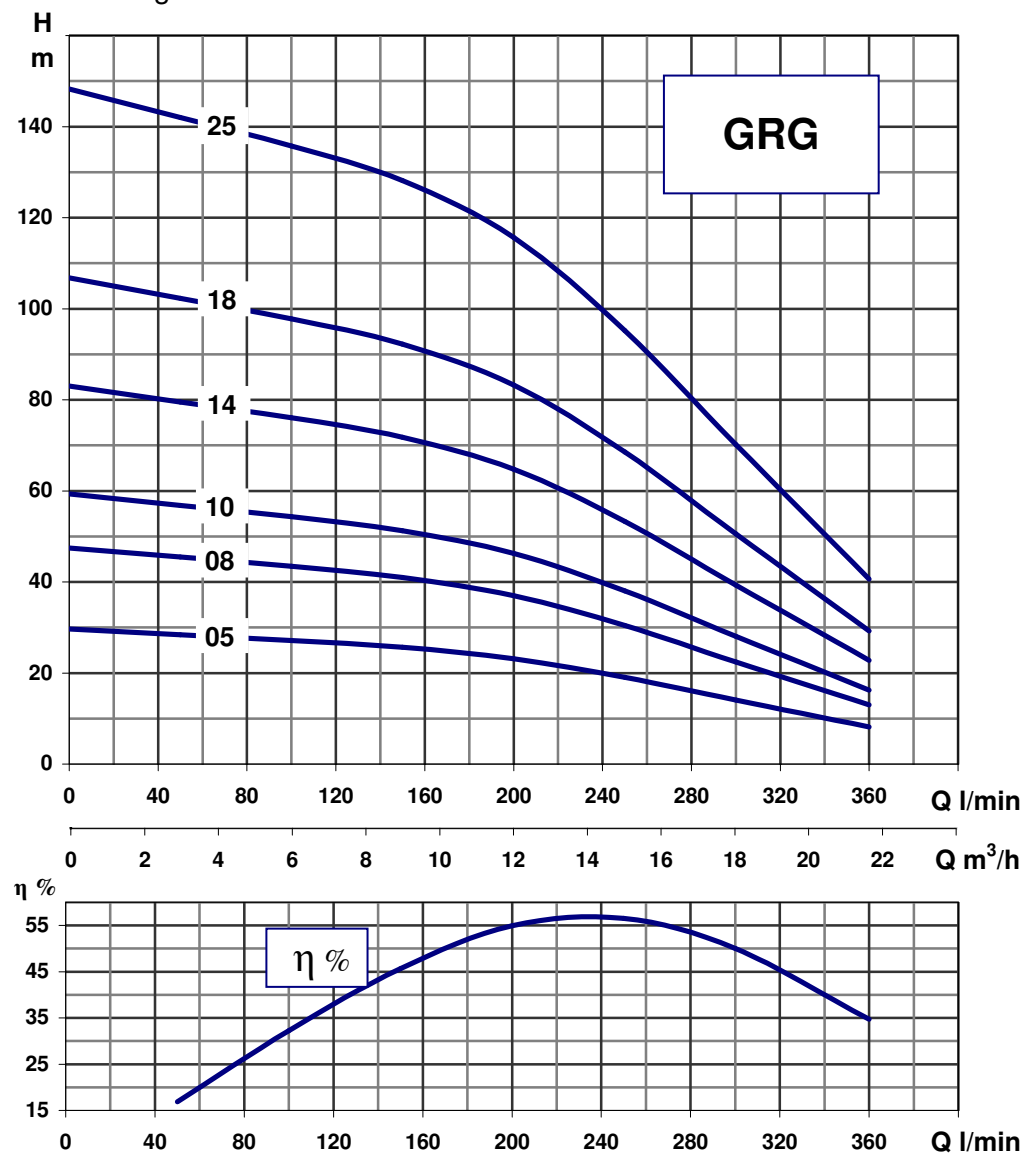

Modell	Version 50 Hz	Motor		Kondensator		Q - Flöde										Dimensioner			
						m³/h	0	3	6	9	12	15	18	21,6					
						l/min	0	50	100	150	200	250	300	360	A	B	C	DN	
						H - Tryckhöjd (m)													
GRG 05	3~220/230 3~380/415	1,5	6,9 3,9			30	28	27	26	23	19	14	8	799	307	493	2"		
GRG 08	3~220/230 3~380/415	2,2	10,2 5,5			47	45	43	41	37	30	22	13	987	339	649	2"		
GRG 10	3~220/230 3~380/415	3	13,5 7,5			59	57	54	51	46	38	28	16	1187	394	794	2"		
GRG 14	3~220/230 3~380/415	4	17,3 9,9			83	80	76	72	65	53	39	23	1586	543	1043	2"		
GRG 18	3~220/230 3~380/415	5,5	23,7 12,6			107	102	98	92	83	69	51	29	1944	653	1292	2"		
GRG 25	3~380/415	7,5	17,1			148	142	136	128	116	95	70	41	2427	731	1697	2"		

debe pumpar

