



SimFlex 40-100

Model Z = Casing / Gehäuse / Pumpehus (Bronze)
Model D = Twin Pump / Doppelpumpe


1x230 V, 50Hz, IEC38	PI [W]	I [A]
Auto min.	30	0,25
Auto max.	350	2,2
Speed I - 4	190 - 350	1,2 - 2,2
Temperature Range (TF 110 - CEN 335-2-51)		
Water temp max. [°C]	110	90
Ambient temp max. [°C]	30	40
Cold Water model [°C]	-5	90
NPSH [bar]		
	80°C - 0,5	95°C - 1,5
Weight (net)	12,8	

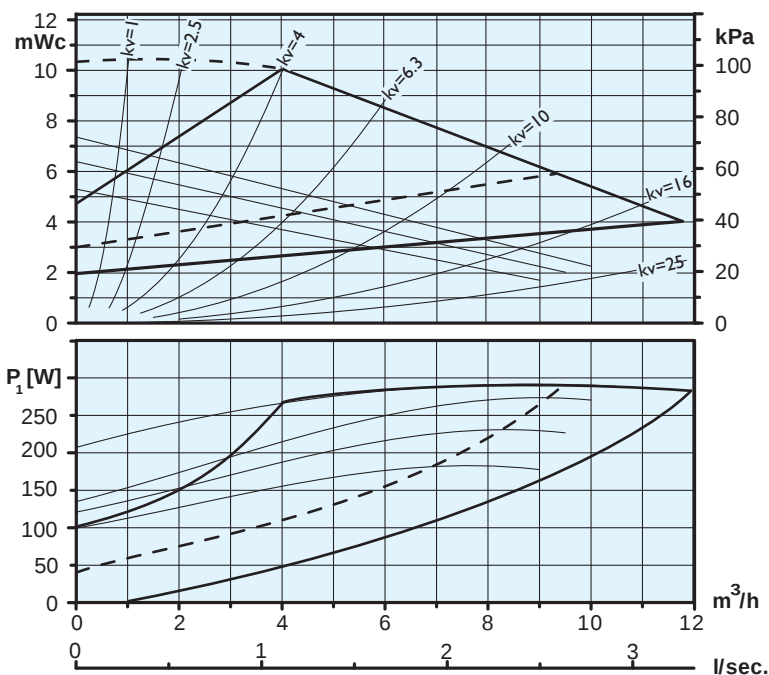





Placement

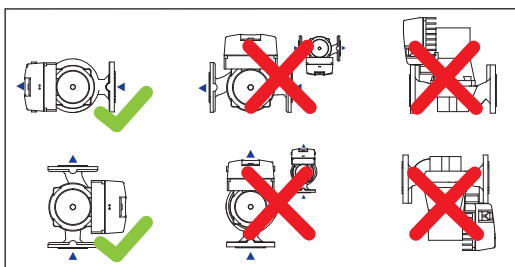

Settings

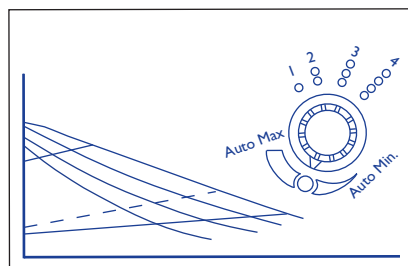

Electrical connection and Signals



Dimensions

