


SimFlex 50-80


Model Z = Casing / Gehäuse / Pumpehus (Bronze)
 Model D = Twin Pump / Doppelpumpe

1x230 V, 50Hz, IEC38	PI [W]	I [A]
Auto min.	27	0,22
Auto max.	345	2,10
Speed 1 - 4	43 - 345	0,32 - 2,10


Temperature Range (TF 110 - CEN 335-2-51)		
Water temp max. [°C]	110	90
Ambient temp max. [°C]	30	40
Cold Water model [°C]	-5	90
<hr/>		
NPSH [bar]	80°C - 0,5	95°C - 1,5
Weight (net)	13,5	

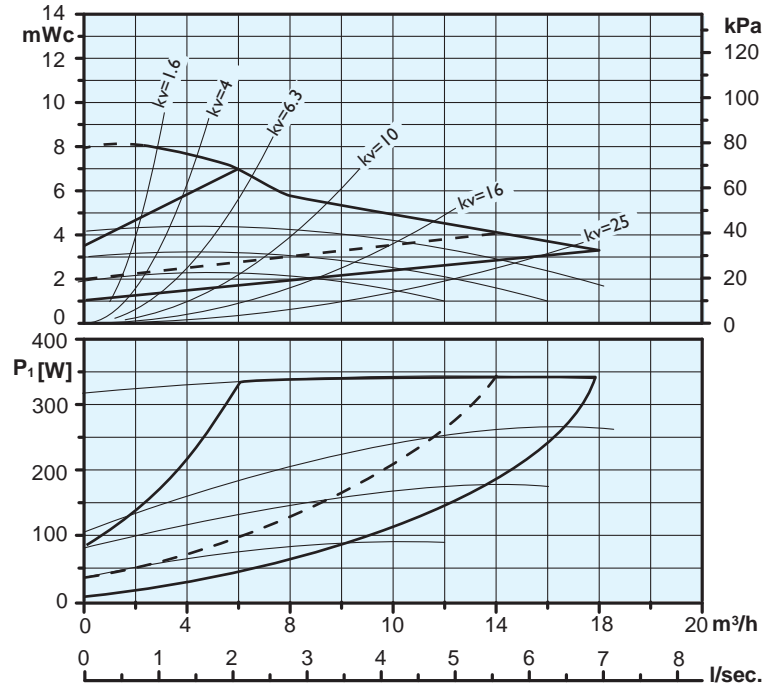





Placement

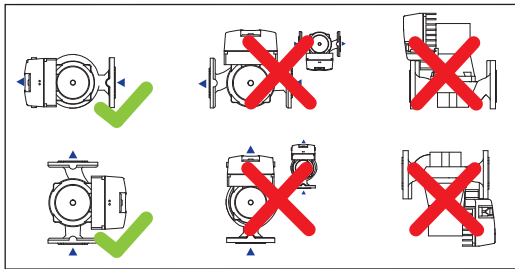

Settings

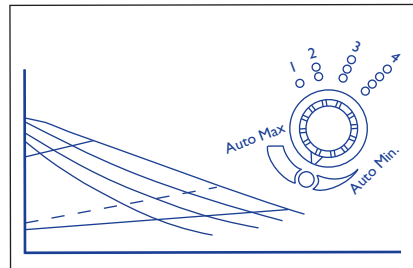

Electrical connection and Signals



Dimensions

