


## SimFlex 50-I40

Model Z = Casing / Gehäuse / Pumpehus (Bronze)  
 Model D = Twin Pump / Doppelpumpe


1x230 V, 50Hz, IEC38	PI [W]	I [A]
Auto min.	60	0,40
Auto max.	700	4,60
Speed I - 4	300 - 700	2,00 - 4,60

Temperature Range (TF 110 - CEN 335-2-51)		
Water temp max. [°C]	110	90
Ambient temp max. [°C]	30	40
Cold Water model [°C]	-5	90


NPSH [bar]	80°C - 0,5	95°C - 1,5
Weight (net)	19,6	

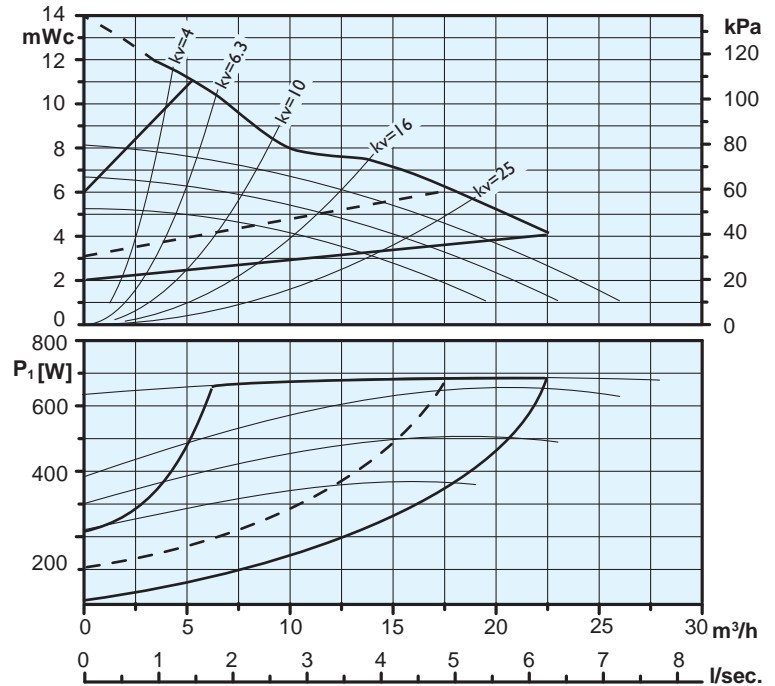





### Placement

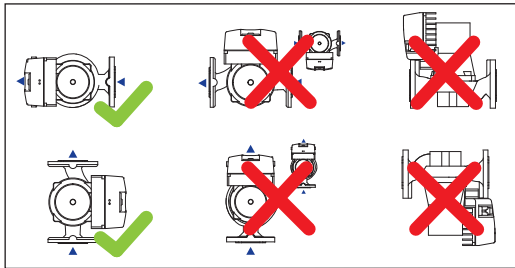

### Settings

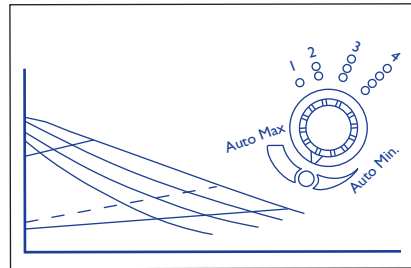

### Electrical connection and Signals



### Dimensions

