


SimFlex 80-120

Model Z = Casing / Gehäuse / Pumpehus (Bronze)
 Model D = Twin Pump / Doppelpumpe


1x230 V, 50Hz, IEC38	PI [W]	I [A]
Auto min.	150	1,30
Auto max.	1400	9,00
Speed 1 - 4	800 - 1400	5,70 - 9,00

Temperature Range (TF 110 - CEN 335-2-51)		
Water temp max. [°C]	110	90
Ambient temp max. [°C]	30	40
Cold Water model [°C]	-5	90


NPSH [bar]	80°C - 0,5	95°C - 1,5
Weight (net)	41,5	

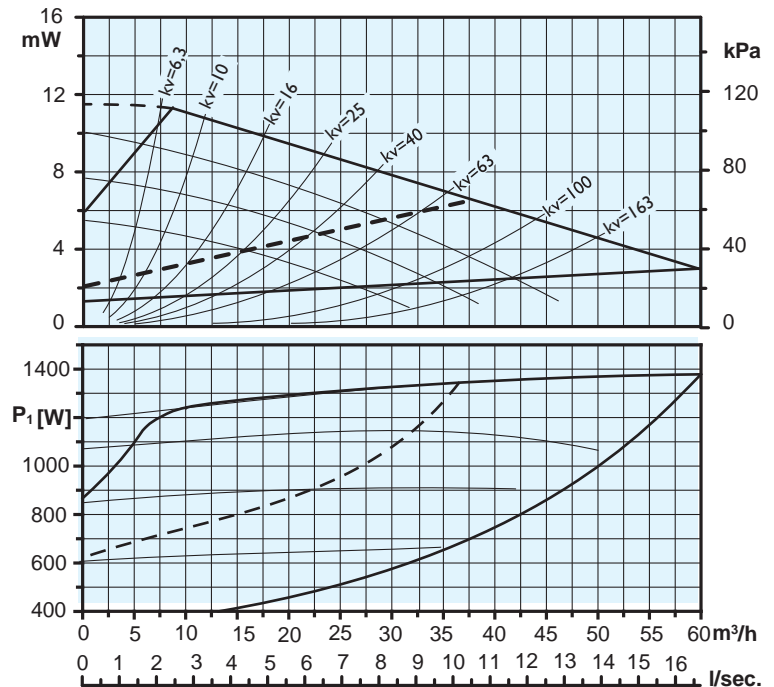





Placement

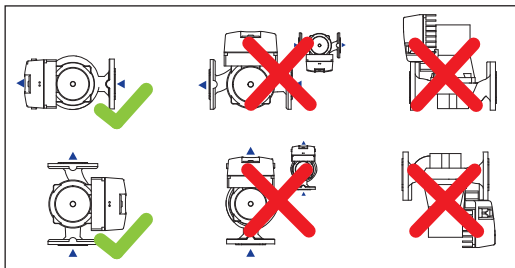

Settings

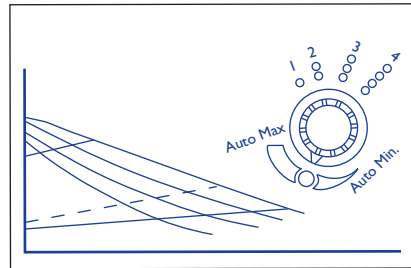

Electrical connection and Signals



Dimensions

