

# VM PUMPAR

## Calio 25-80

EEL<sub>0,23</sub>





I x 230 V, 50Hz, IEC38	P <sub>I</sub> [W]	I [A]
Auto min.	8	0,1
Auto max.	140	1,15

Water temp max. [°C]	110	
Water temp min. [°C]	-10	
Ambient temp max. [°C]	40	

NPSH [bar]	80°C - 0,5	95°C - 1,5
Kg. (net)	4,6	



### Installation

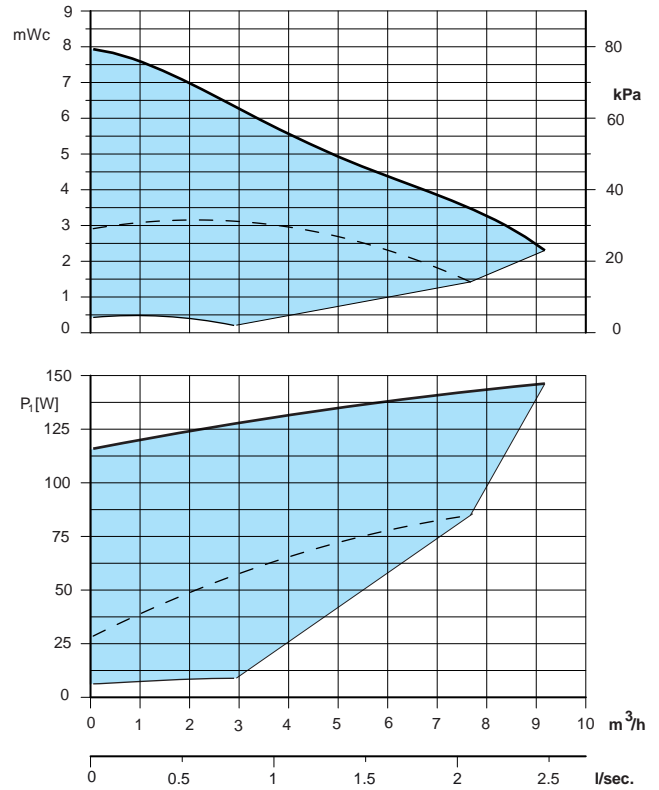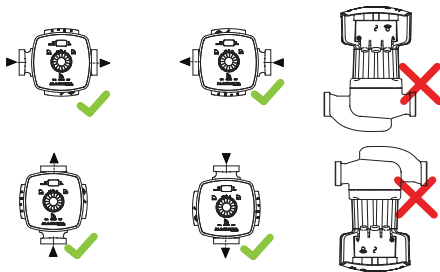


### Electrical connection

Function	Symbol	Terminal Pair	Terminal cross section	Terminal ID
Power supply 1~230 VAC, 50/60 Hz			1.5 mm <sup>2</sup>	3 - PE 2 - N 1 - L
General fault message			1.5 mm <sup>2</sup>	3 - NO 2 - COM 1 - NC
External analog signal 0 - 10VDC	0-10V		1.5 mm <sup>2</sup>	1 - 0 2 - U <sub>in</sub>
External signal for start/stop of pump (terminalpair supplied bridged)	RUN		1.5 mm <sup>2</sup>	1 - 0 2 - R
Modbus	COM		1.5 mm <sup>2</sup>	3 - G 2 - A 1 - B
Multi pump operation	DUAL		1.5 mm <sup>2</sup>	3 - G 2 - A 1 - B

### Settings

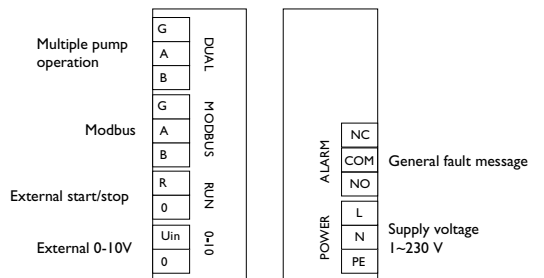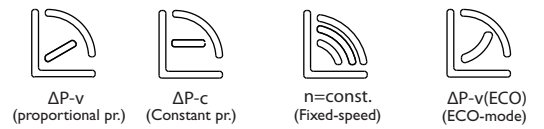


### Dimensions

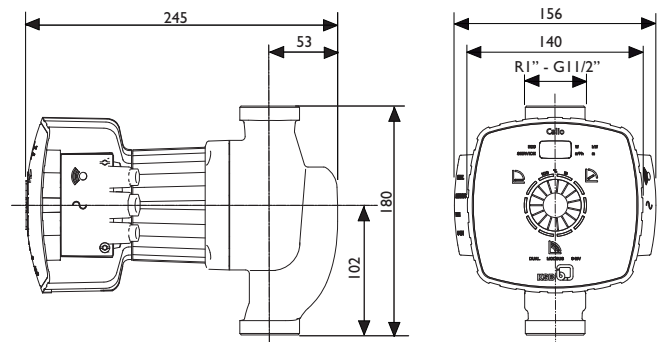


VM Pumph AB reserve the right to change the product without prior notice and take no responsibility for inaccuracies or misprints.


**Calio 25-80, ECO**

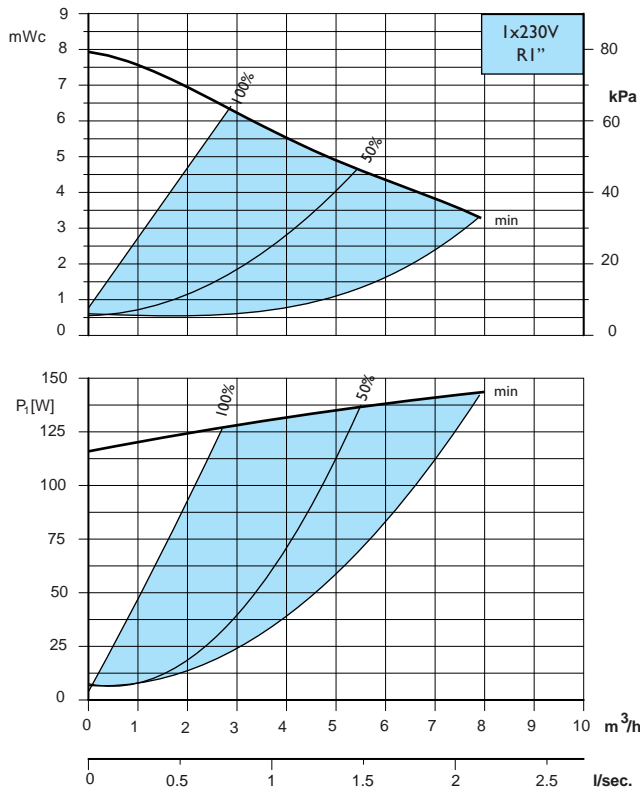

**Calio 25-80, Δ pv**

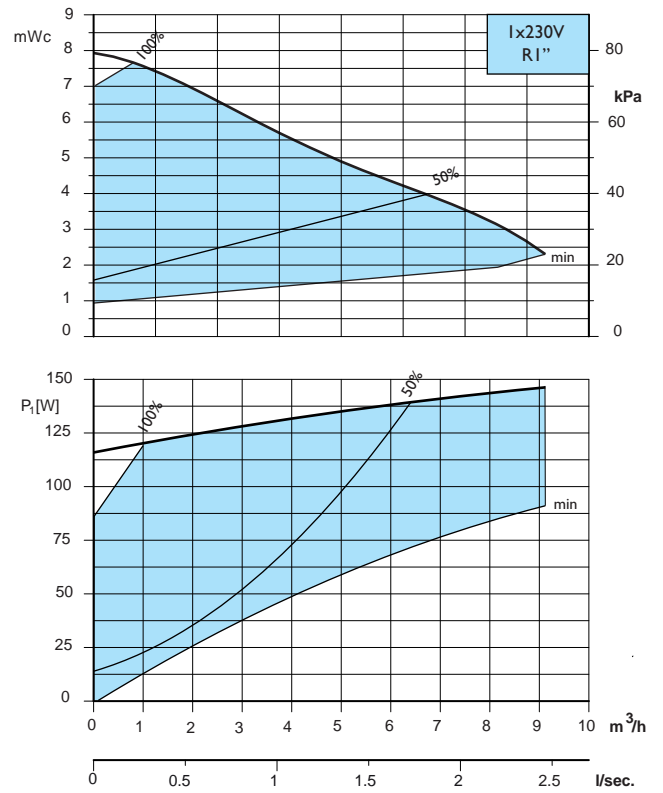

**Calio 25-80, Δpc**

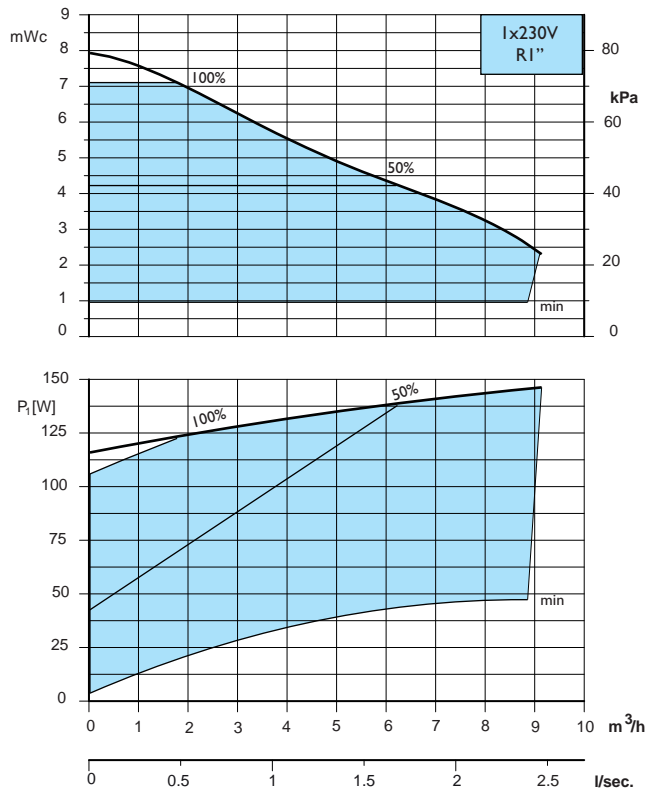

**Calio 25-80, Boost**

