

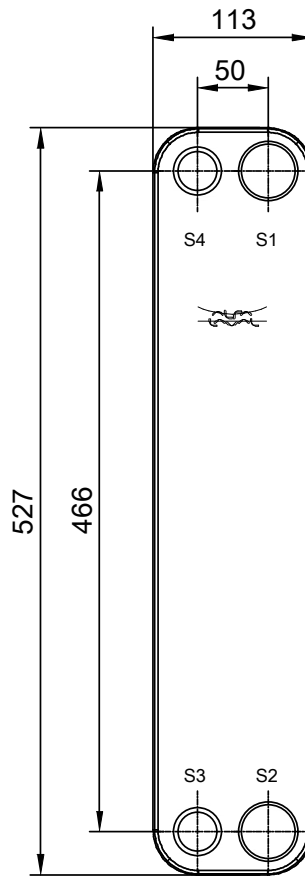
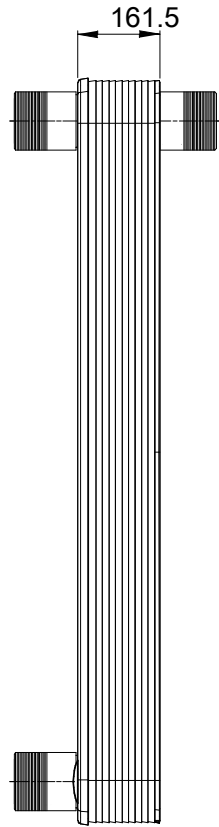


Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

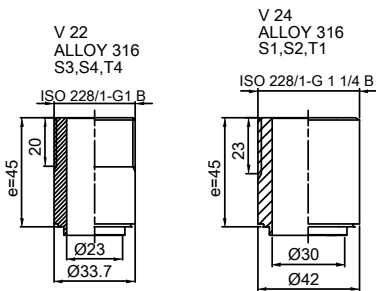

Frameplate is depressed 2.1 mm at connections S3 and S4 if holed.  
Pressureplate is depressed 2.1 mm at connections T3 and T4 if holed.

T1 T2 T3 T4 locations on back side correspond to S1 S2 S3 S4 on front side

HEATING SURFACE m<sup>2</sup>  
NETWEIGHT 14.4 kg  
OPERATING WEIGHT kg  
PLATE MATERIAL ALLOY 316  
PLATE GROUPING 1\*16L+1\*15L/2\*16L

ALL DIMENSIONS IN MILLIMETERS

SIDE	MEDIA	INLET	TEMP. °C	OUTLET	TEMP. °C	FLOW RATE	PRESSURE DROP	LIQUID VOL.
1	Water	S1	°C	T1	°C	kg/h	kPa	3.3 dm <sup>3</sup>
2	Water	T4	°C	S4	°C	kg/h	kPa	3.2 dm <sup>3</sup>



PRESSURE VESSEL APPROVAL  
CB60-64L (3287109038)

PED

www.alfalaval.com

CUSTOMER NAME / REF. NO.

TOTAL LENGTH 243 mm  
TOTAL WIDTH 113 mm  
TOTAL HEIGHT 527 mm

COMPANY / REF.  
Alfa Laval Nordic AB



4/23/2019  
REV 0