

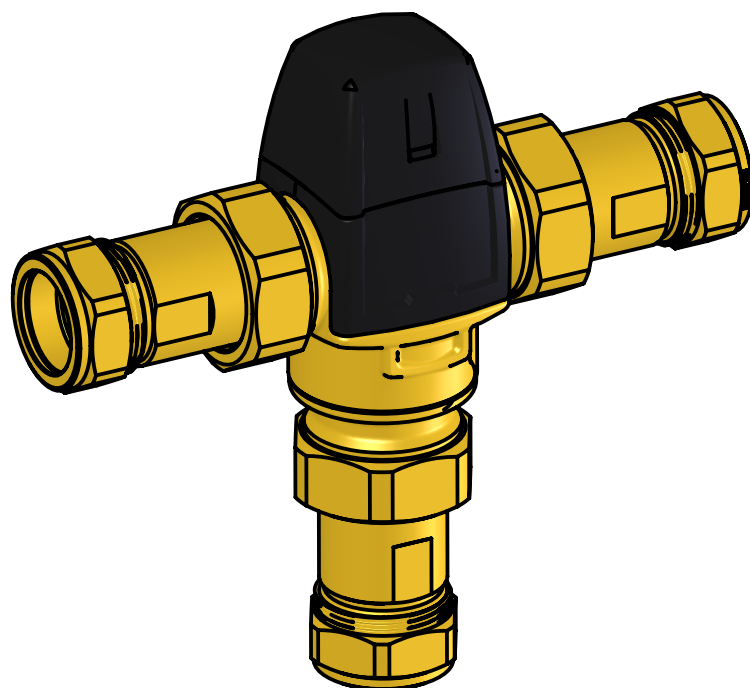



Thermostatic Emergency Mixing Valve for body-, eye- and combi showers
Adjustable outlet temperature, approx. 22°C / 72°F to 28°C / 82°F
Fail safe on hot and cold side:
• Anti-scalding device on hot side
• Intentional leak on cold side
• Integrated check valve on hot and cold inlet
Intentional leak at bigger differential pressure hot/cold than 0,5 bar / 7,3 psi: Cold water only : 2,7 m³ / h / 11,9 US-gpm
Housing material DZR brass
Kv-valve : 4,7 m³ / h / 20,7 US-gpm
Min. pressure: 1,5 bar / 21,8 psi

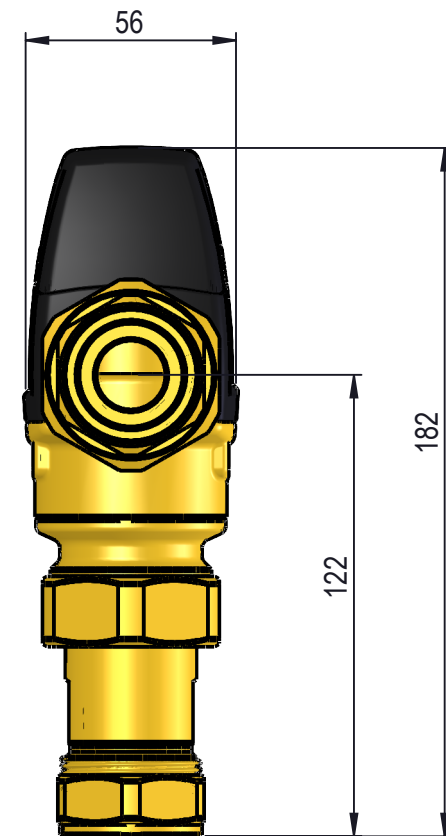

Description:		Fixed thermostatic mixing valve	
Media:		Water	
Material:			
Specification:			
Comments:		For emergency showers	
Drawing type:		Customer drawing	Weight: 1,715 Kg
		All dimensions marked with  are inspection dimensions	
Unspecified liniar tolerances:		Unspecified angular tolerances:	
Designed by:	Drawn by:	Released on TM No.	Date:
	TLA	7215	09-07-18
Format:		Drawing No.:	17512009
A3			

B	D7	30-11-20	8348	PEC	PEC	Adjustable outlet temperature	
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	
BROEN-LAB						This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S	

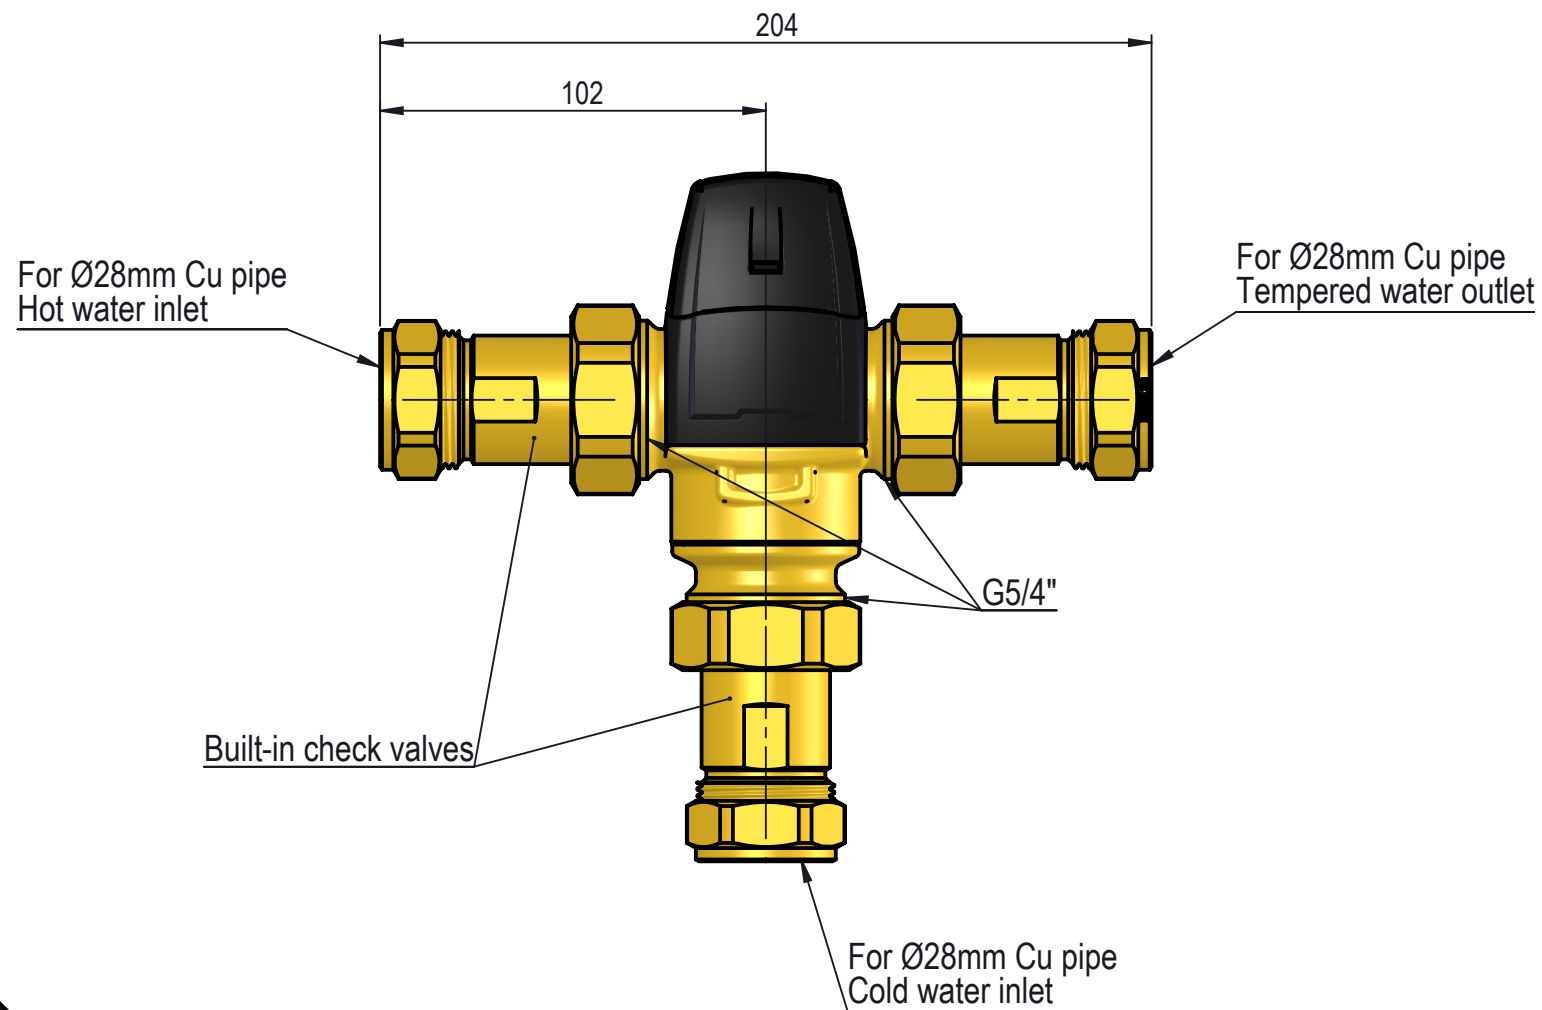