


DIMENSIONS IN MILLIMETRES PROJECTION

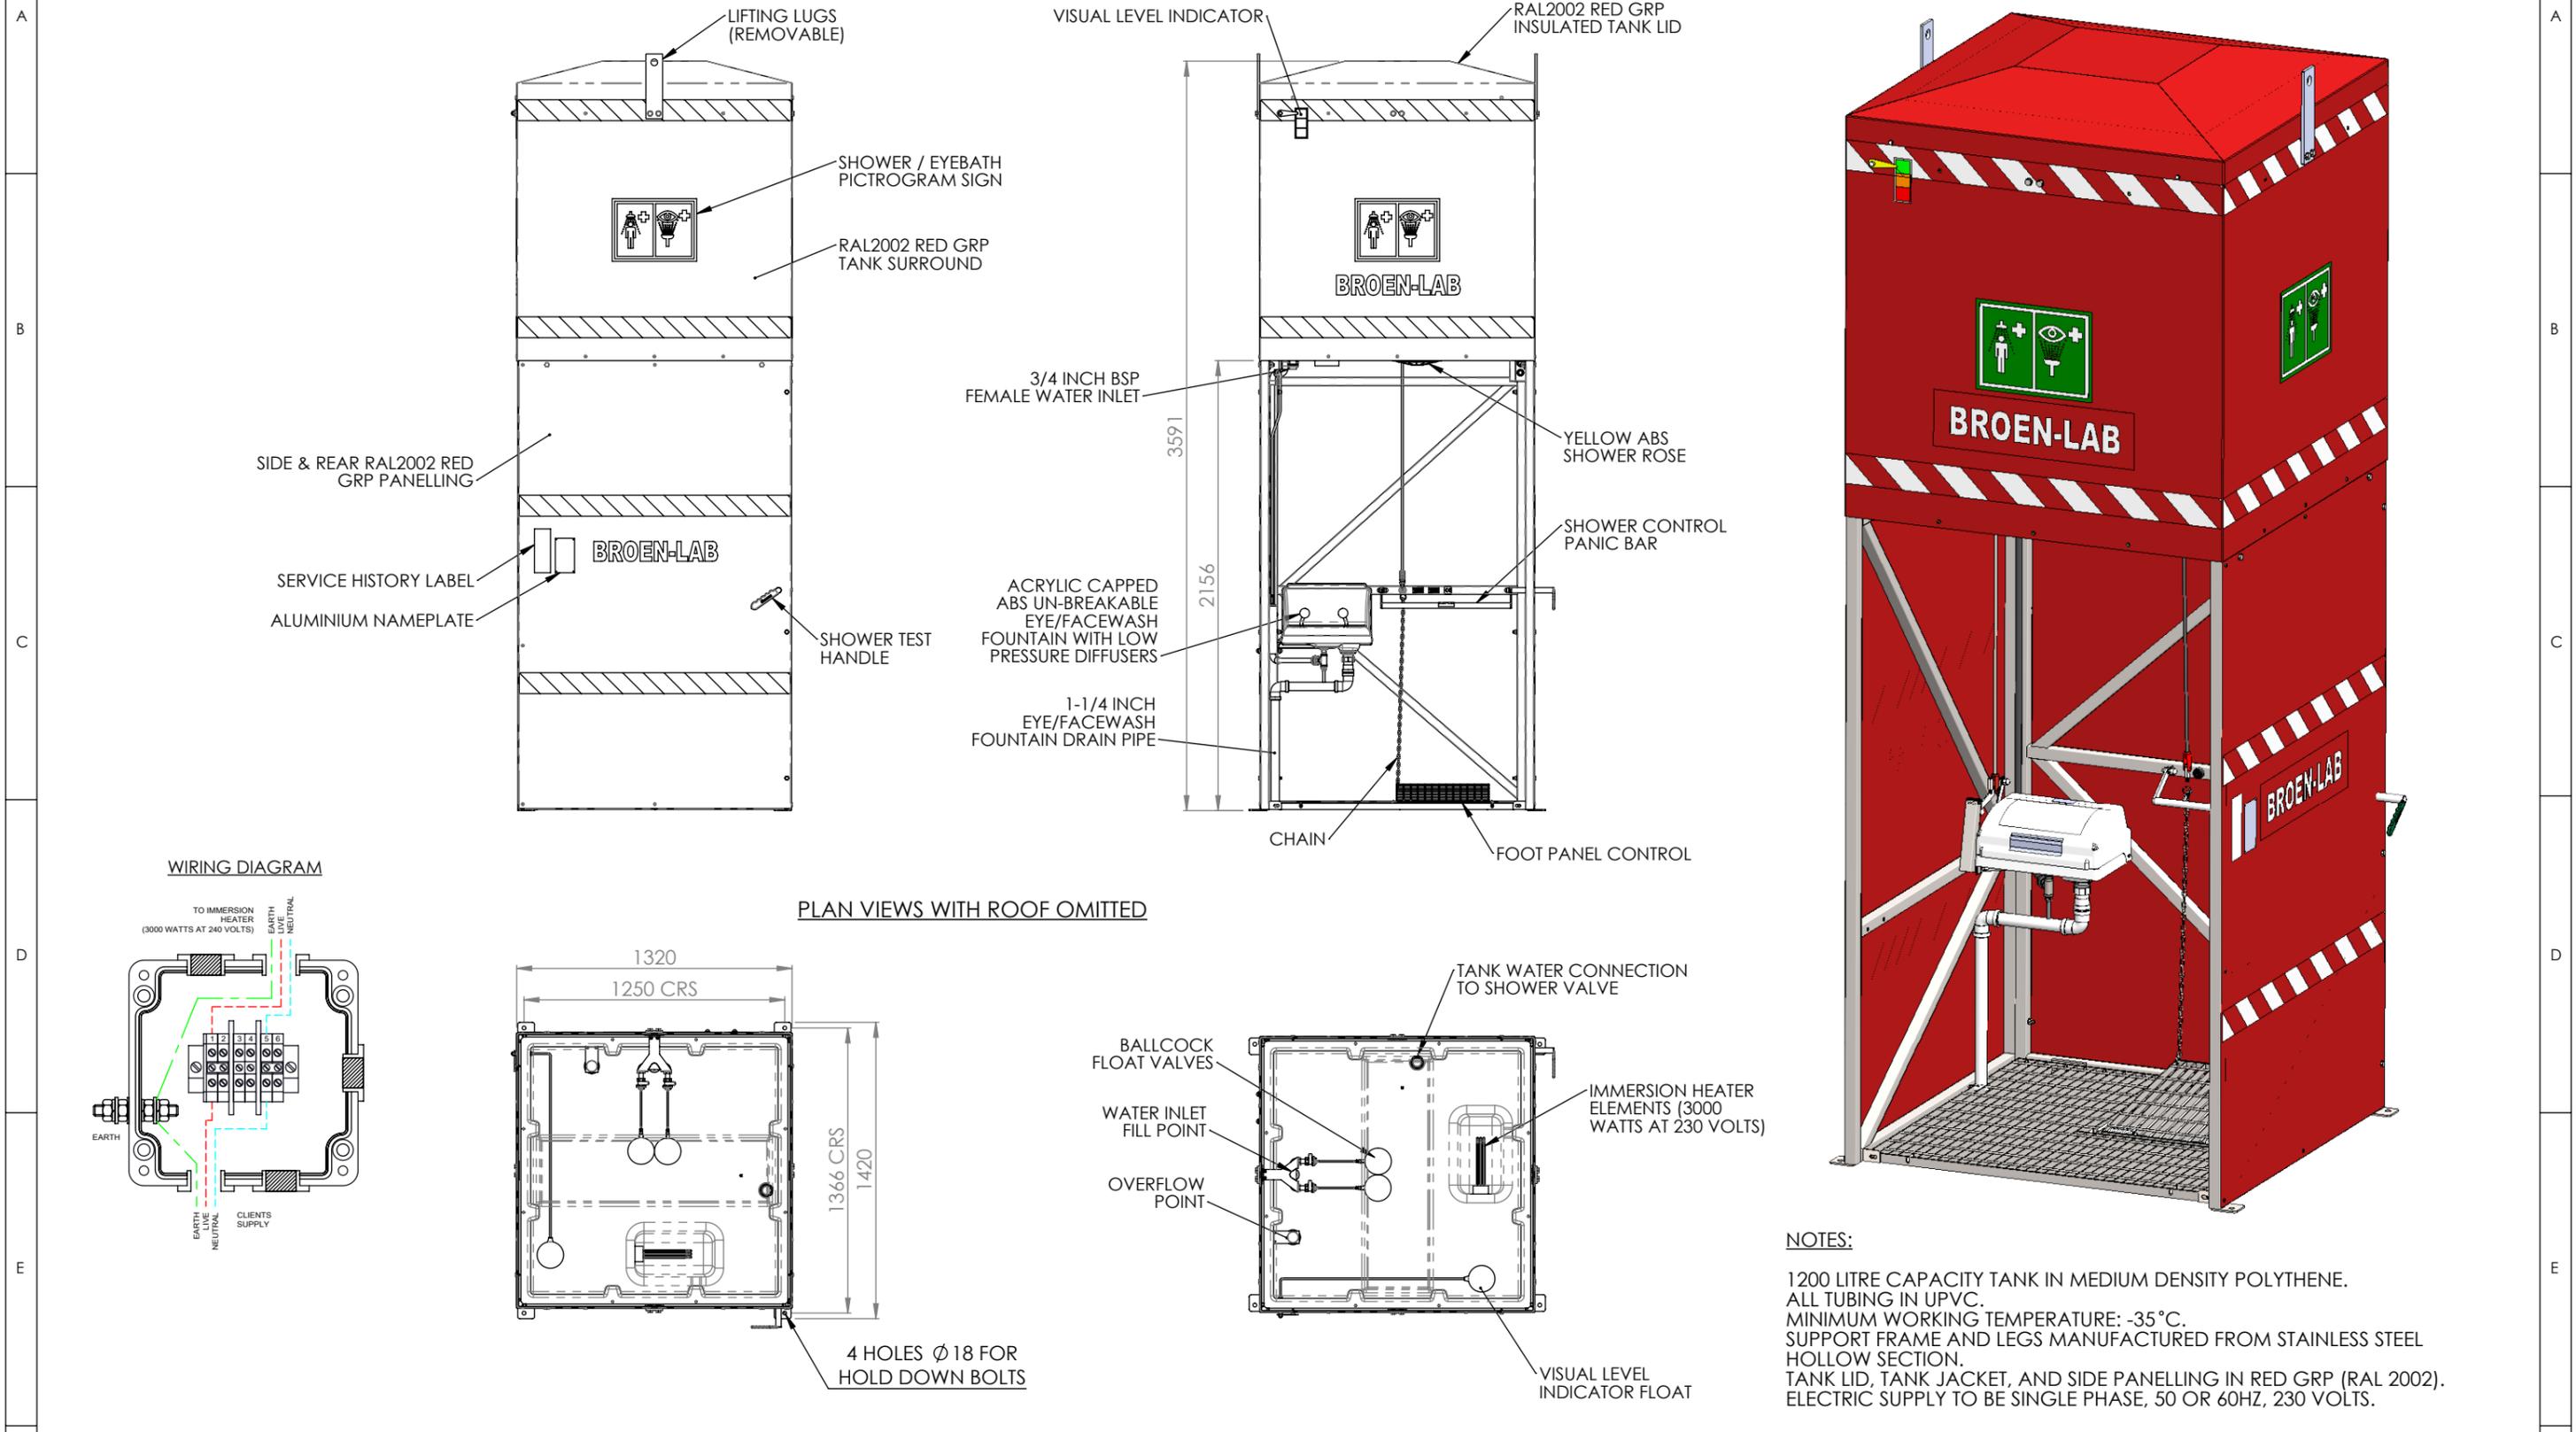

**NOTES:**  
 1200 LITRE CAPACITY TANK IN MEDIUM DENSITY POLYTHENE.  
 ALL TUBING IN UPVC.  
 MINIMUM WORKING TEMPERATURE: -35°C.  
 SUPPORT FRAME AND LEGS MANUFACTURED FROM STAINLESS STEEL HOLLOW SECTION.  
 TANK LID, TANK JACKET, AND SIDE PANNELLING IN RED GRP (RAL 2002).  
 ELECTRIC SUPPLY TO BE SINGLE PHASE, 50 OR 60HZ, 230 VOLTS.

**BROEN-LAB**

Drejervaenget 2  
 5610 Assens  
 Denmark  
 Tel. +45 6376 6376  
 lab@broen-lab.com

NAME	DATE
DRAWN: S.W.	08/11/12
CHECKED: A.L.	08/11/12
APPROVED: A.L.	08/11/12
MATERIAL: STAINLESS STEEL FRAME	

DEBUR AND BREAK SHARP EDGES  
 DIMENSIONS ARE IN MILLIMETRES UNLESS SPECIFIED OTHERWISE  
 TOLERANCES:  
 LINEAR:  
 ANGULAR:  
 SCALE:1:30  
 DO NOT SCALE OFF DRAWING

TITLE: OUTDOOR EMERGENCY 1200 LITRE TANK SHOWER SUITABLE FOR FLAMEPROOF AREAS. SUPPLY VOLTAGE 230V, 50 OR 60 HZ.		REVISION
FINISH: CLEAN	SHEET 1 OF 1	A
DWG NO. H7610031001241		A3