


**PN 10/16/25 - DN 50...200**

KAT-A 1912

**Product characteristics and benefits**

- Triple function air valve
- Single chamber air valve in compact design
- with integrated ball valve
- Venting function:
  - Large orifice to vent high quantities of air during draining the pipeline
  - Large orifice to release high quantities of air during filling the pipeline
  - Small orifice to release low quantities of air during operation under pressure
- Very high discharge capacity up to sonic velocity due to stabilised floater
- With flange end acc. to EN 1092-2
- Resilient seated
- Outlet female threaded acc. to DIN ISO 228
- Minimum operation pressure: 0.3 bar

**Materials**

- Body: Ductile iron EN-GJS-400-15 (GGG-40)
- Bonnet: Stainless steel 1.4308
- Bonnet bolts: Stainless steel A2 (DIN EN ISO 3506)
- Inner parts: Stainless steel 1.4541
- Float: Plastic polypropylene
- Sealing: EPDM

**Corrosion protection**

- Internally and externally epoxy coated acc. to GSK guidelines

**Versions**

- Standard version as described
- For pressures of 0.1...1 bar special seal (with special sealing). Please specify operating pressure when inquiring/ordering.
- Floater stainless steel A4
- Bonnet ductile iron EN-GJS-400-15 (GGG-40)
- Anti-Surge with integrated shut-off valve and individual calculated orifice acc. to KAT-A 1918
- With integrated shut-off valve
- DUOJET®-S with VAG CEREX® 300-L Butterfly valve with hand lever acc. to KAT-A 1912-S
- Slow-closing option with shut-off valve
- DUOJET® AWWA standard class 150 or class 300 acc. to KAT-A 1919
- DUOJET®-T tamper resistant acc. to KAT-A 1925
- With insect protection
- Venting set acc. to KAT-A 1914
- Pressure rate PN40, PN50, class 300

**Field of application**

- Chamber installation
- Installation in plants

**Tests and approvals**

- DVGW tested and registered
- Final inspection test according to EN 12266-1 (leakage rate A)



without ball valve



with ball valve


**Note**




For proper installation and safe operation please follow the installation and operation instructions:  
KAT-B 1912

**Field of application**


DN	PN	Maximum operating pressure	Maximum operating temperature for neutral liquids
		[bar]	[°C]
50...200	25	25	50
50...200	16	16	50
200	10	10	50



Drawing

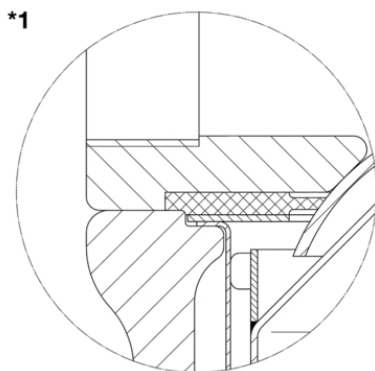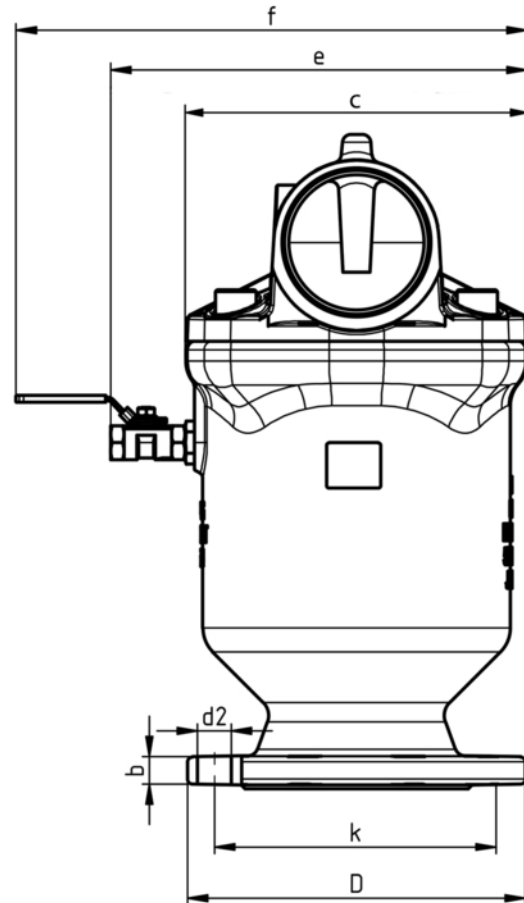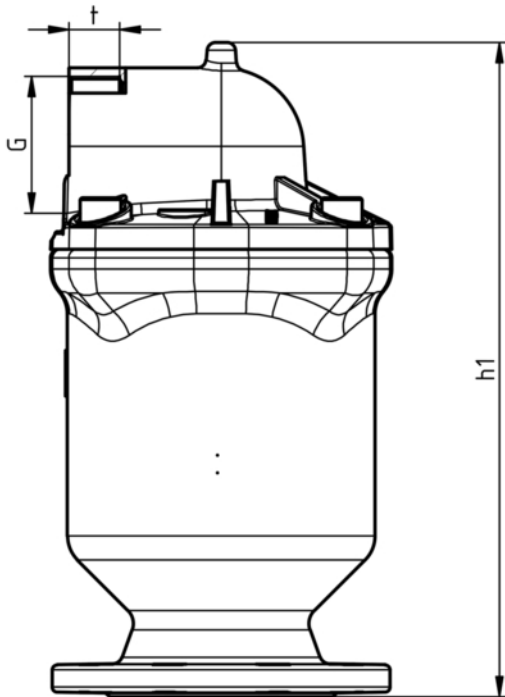

\*1: Special seal for operating pressures of 0.1....1 bar (no standard version)

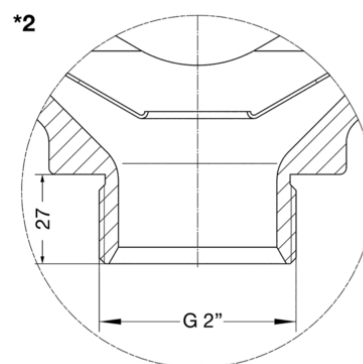

\*2: DN 50 / PN 16 connection with G 2" thread (no standard version)



## Technical data

### PN 10

<b>DN</b>		<b>200</b>
D	[mm]	340
G Screw connection	[inch]	4"
b	[mm]	20
k	[mm]	295
c	[mm]	260
e	[mm]	303
d2	[mm]	22
f	[mm]	359
h1	[mm]	505
t	[mm]	40
No. of holes		8
Weight approx.	[kg]	57.00
Volume approx.	[m <sup>3</sup> ]	0.04

### PN 16


<b>DN</b>		<b>50</b>	<b>80</b>	<b>100</b>	<b>150</b>	<b>200</b>
D	[mm]	165	200	220	285	340
G Screw connection	[inch]	1 1/4"	2"	2 1/2"	4"	4"
b	[mm]	19	19	19	19	20
k	[mm]	125	160	180	240	295
c	[mm]	160	185	205	260	260
e	[mm]	202	226	246	303	303
d2	[mm]	18	18	18	22	22
f	[mm]	258	282	302	360	359
h1	[mm]	290	340	383	505	505
t	[mm]	20	25	30	40	40
No. of holes		4	8	8	8	12
Weight approx.	[kg]	15.00	25.00	28.00	56.00	57.00
Volume approx.	[m <sup>3</sup> ]	0.01	15	0.02	0.04	0.04

### PN 25

<b>DN</b>		<b>50</b>	<b>80</b>	<b>100</b>	<b>150</b>	<b>200</b>
D	[mm]	165	200	235	300	360
G Screw connection	[inch]	2"	2"	2 1/2"	4"	4"
b	[mm]	19	19	19	20	22
k	[mm]	125	160	190	250	310
c	[mm]	185	185	205	260	260
e	[mm]	202	226	246	303	303
d2	[mm]	18	18	22	28	28
f	[mm]	258	282	302	360	359
h1	[mm]	337	340	383	505	505
t	[mm]	25	25	30	40	40
No. of holes		4	8	8	8	12
Weight approx.	[kg]	25.00	25.00	28.00	56.00	57.00
Volume approx.	[m <sup>3</sup> ]	15	15	0.02	0.04	0.04



Further information

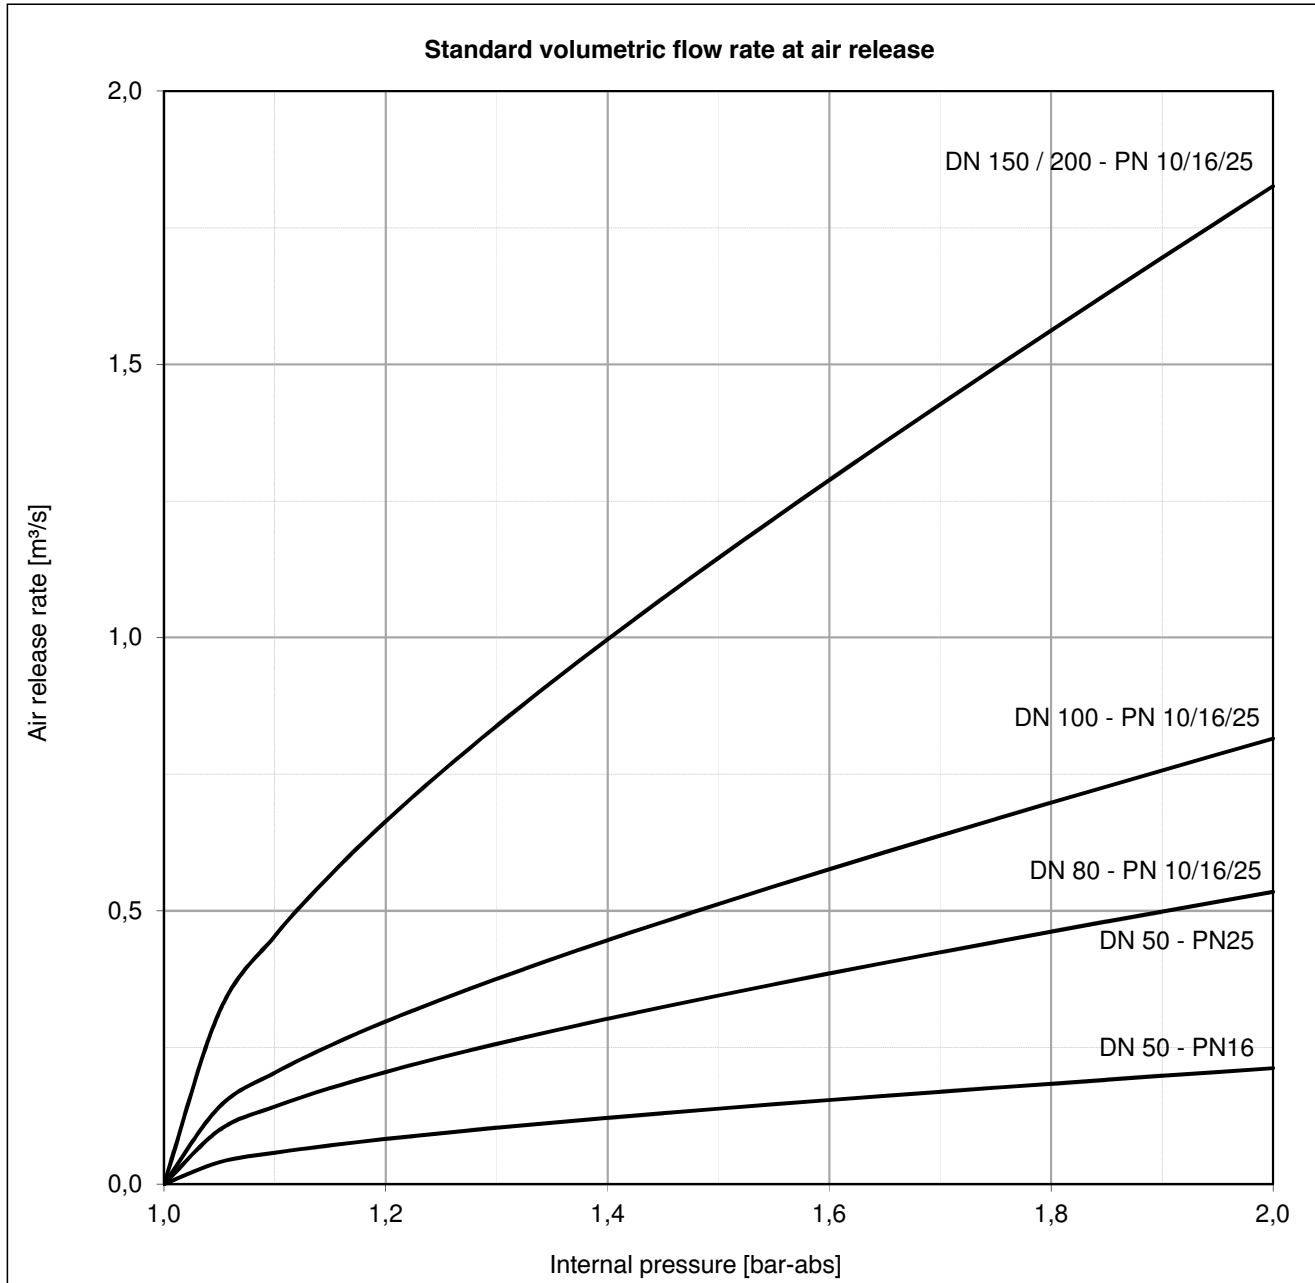

Air is compressible and its volume is depending on pressure and temperature.

Conversion:


$$Q = Q_N * \frac{p_N * T}{p * T_n}$$

with  $p_N = 1,013 \text{ bar}$

and  $T_N = 273,15 \text{ K}$



Further information

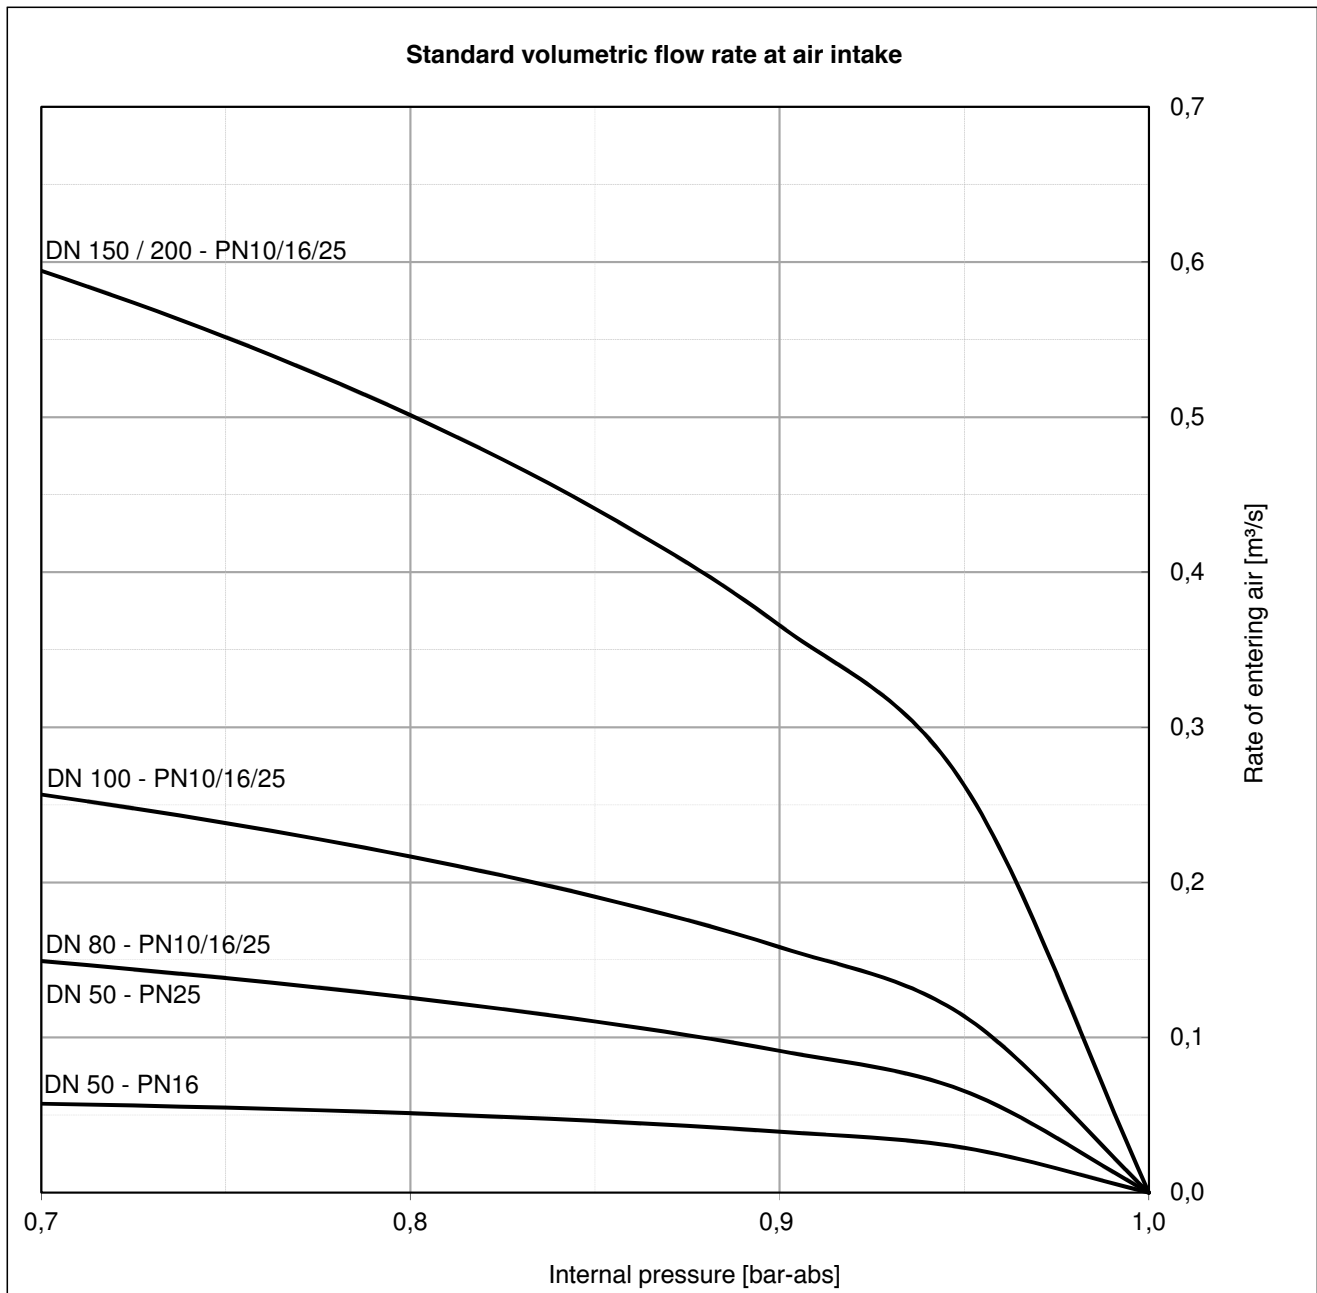


Air is compressible and its volume is depending on pressure and temperature.

Conversion:  $Q = Q_N * \frac{p_N * T}{p * T_n}$  with  $p_N = 1,013bar$  and  $T_N = 273,15K$



Further information

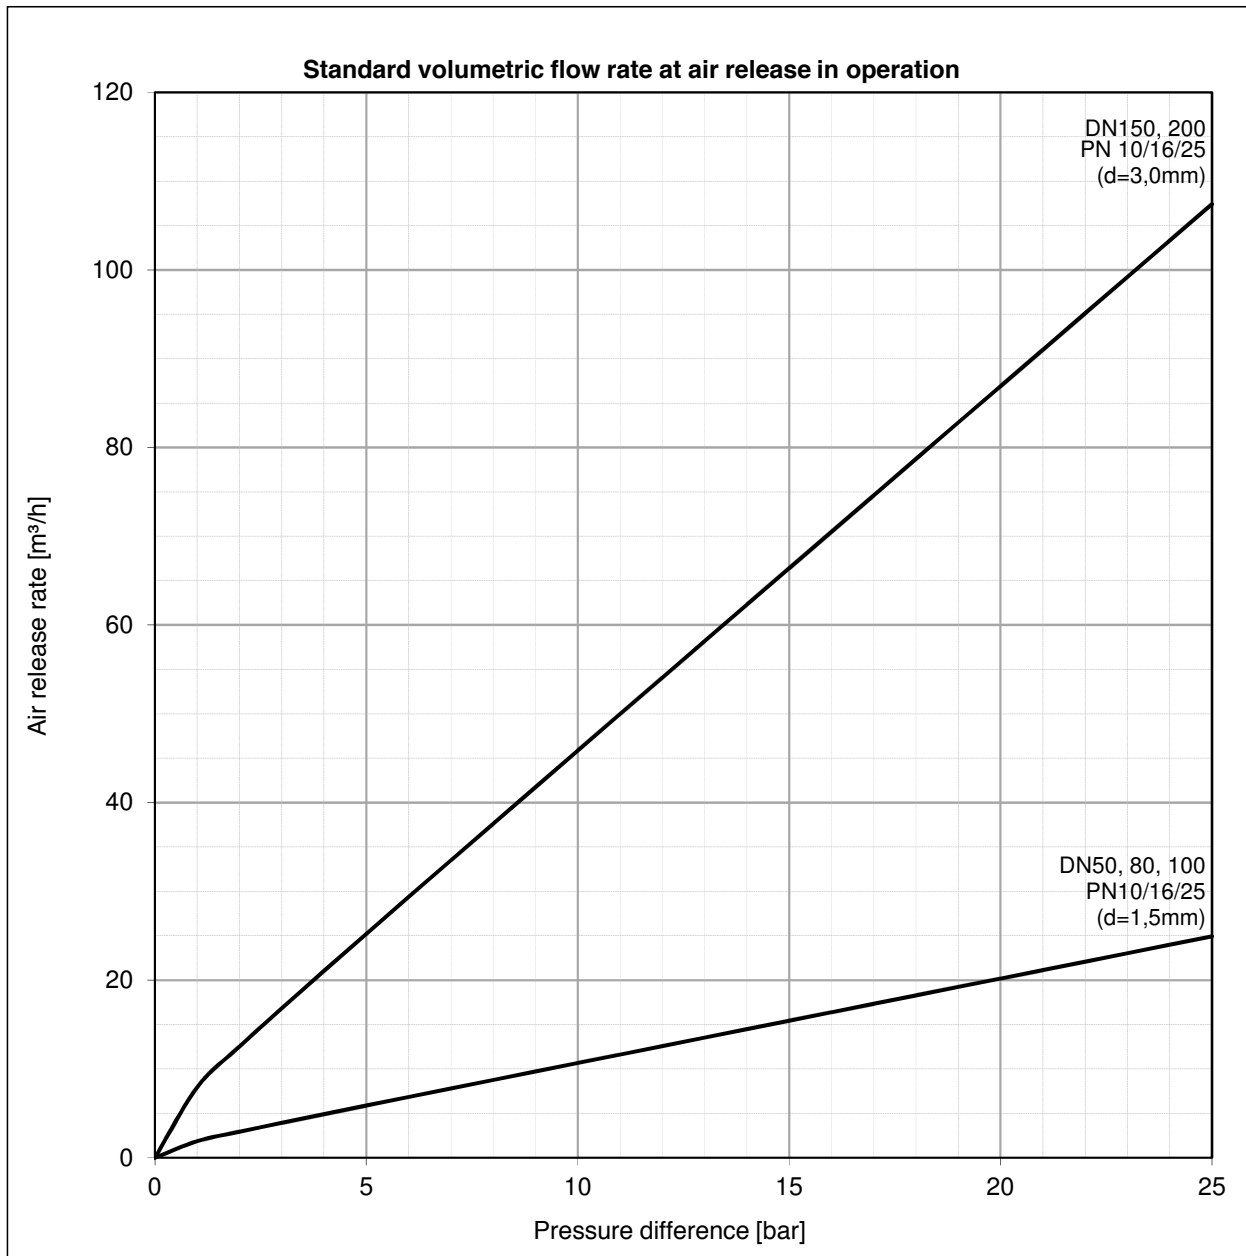

Air is compressible and its volume is depending on pressure and temperature.

Conversion:  $Q = Q_N * \frac{p_N * T}{p * T_n}$  with  $p_N = 1,013bar$  and  $T_N = 273,15K$