Environmental Product Declaration





In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Altech water meter console G32 & G40

from

Saint-Gobain Building Distribution (SGDS)

S-P-10352



Program: The International EPD® System, <u>www.environdec.com</u>

Program operator: EPD International AB

EPD registration

number:

Publication date: 2023-08-31 Valid until: 2028-08-30

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com













General information

Programme information

Programme:	The International EPD® System						
	EPD International AB						
Address	Box 210 60						
Address:	SE-100 31 Stockholm						
	Sweden						
Website:	www.environdec.com						
E-mail:	info@environdec.com						

Accountabilities for PCR, LCA and independent, third-party verification							
Product Category Rules (PCR): Construction Products PCR 2019:14 version 1.2.5							
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)							
PCR review was conducted by: The Technical Committee of the International EPD System.							
Life Cycle Assessment (LCA)							
LCA accountability: Fanni Végvári, CarbonZero AB							
Third-party verification							
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:							
Third-party verifier: Vladimír Kočí, LCA Studio s.r.o, Czech Republic							
Approved by: The International EPD® System							
Procedure for follow-up of data during EPD validity involves third party verifier:							
□ Yes ⊠ No							

The EPD owner has the sole ownership, liability, and responsibility for the EPD.


EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.





Company information

Owner of the EPD	Saint-Gobain Distribution Sweden
Contact	SGDS - Beriar Maroof (beriar.maroof@sgdsgruppen.se)
Description of the organisation	SGDS Gruppen - specialists in collaboration for more efficient business in construction and installation. SGDS Gruppen AB is the head company of some of Sweden's leading trading companies in construction, sheet metal, tiles and installation. All the companies have long and solid industry experience and provide most of Sweden's craftsmen with materials for various projects. Customers in different companies can also buy support items from the sister companies in the group, and in selected cases, we take joint projects to facilitate the logistics of the supply of goods, which is then often critical for a smooth construction project. Optimera - construction trade for professional carpenters Dahl – heat, plumbing and sanitary specialist Bevego - building sheet metal, ventilation and technical insulation Kakelspecialisten and Konradsson's Tiles - tiles, tiling and bathroom fittings
	The company's focus is on sales and services with direct contact to about 150,000 customers regularly.
	Saint-Gobain Distribution Sweden group (SGDS) is owned by Saint-Gobain with a presence in 64 countries and over 190 000 employees worldwide.
Name and location of production site	Gnosjö, Sweden

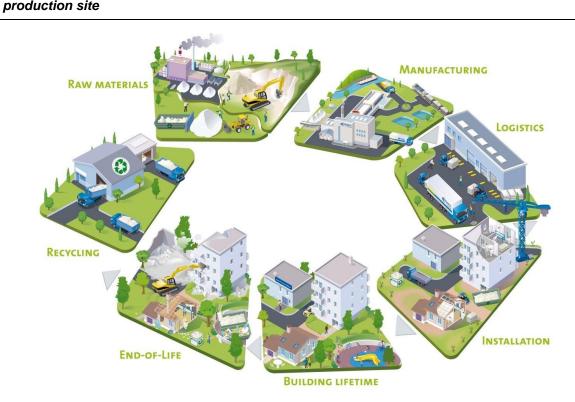






Product information

Product name	Altech water meter console G32 & G40
Product identification	Water meter console
	The EPD is a specific EPD for this product and not an average.
Product description	This product is made of brass, stainless steel, nitrile, PE and PP and is installed on the wall.
Use	Altech water meter console G32 and G40 is intended to relief stresses and vibrations in the pipelines in connection with the meter change.

LCA information

Functional unit / declared unit	1 kg of Altech water meter console G32 & G40
Reference service life	Not applicable
Database(s) and LCA software used	Calculation completed in LCA for Experts v10.7 with an integrated Ecoinvent database 3.8
System boundaries	Cradle to grave, with options. (A1-A3, A4, C1-C4, D)

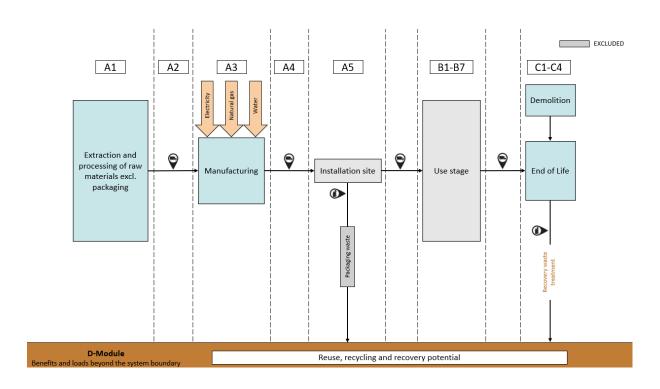





More information

The EPD covers the following range of products from Dahl:

- Altech water meter console G32
- Altech water mater concole G40

Article number	Specification
4647986	G32 with check valve
4647987	G32
4647988	G40 with check valve
4647989	G40

These products are produced in the same factory and have the similar material composition. The worst-case product has been declared.

A1, Raw material supply

This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream of the studied manufacturing process.

A2, transport to the manufacturer

This module includes the transportation of raw materials to the manufacturing site.

A3, manufacturing

This module includes all resources used during the production of Altech water meter console and waste produced. This also includes additives and packaging material.

A4, Transport

Transportation from the manufacturing site in Sweden to SGDS Gruppen's distribution centre and then from the distribution centre to the building site is included.

A5, Construction installation

This stage is partially included to balance the biogenic content in packaging.

B1-B7 Use stage

This stage is not declared.

C1 Deconstruction/Demolition

This module includes the de-construction and/or demolition of the building. This is not relevant as the product included in this study is not used in the construction process.

C2 Transport

This module represents the transport distance to the waste processing facility.

C3 Waste processing

This module includes any waste treatment needed.

C4 Final disposal

This module includes any material that is landfilled.





D Benefits and loads beyond the system boundary

This module includes emission credits obtained from energy recovery and/or recycling materials.

Cut-off criteria:

All input and output flows in a unit process were considered i.e., taking into account the value of all flows in the unit process and the corresponding LCI where data was available. Data gaps were filled by conservative assumptions with average or generic data. Any assumptions in such case were documented. The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%).

Content declaration

Content

Content declaration	Amount (kg)
Brass	0,5204
Stainless steel	0,4664
Nitrile	0,0003
PE	0,0004
PP	0,0126
Total	1

Packaging materials	Weight, kg	Weight-% (versus the product)	
Wood pallet	0,713	71,3%	
Total	0,713	;	71,3%

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional or declared unit
Lead	231-100-4	7439-92-1	1,56





Modules declared and geographical scope

	Product stage			Asser	_		Use stage					E	nd of l	ife stag	ge	Benefits & loads beoyond system boundary	
	Raw materials	Transport	Manufacturing	Transport	Assembly	$\mathbf{U}_{\mathbf{Se}}$	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Modules	A1	A2	A3	A4	A5	B1	B2	В3	B4	В5	В6	В7	C1	C2	С3	C4	D
Modules declared	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	EU	EU	SE	SE	-	-	-	-	-	-	-	-	SE	SE	SE	SE	SE
Specidifc data used	Specific data used in module A3		-	-	-	-	-	-	-	-	-	-	-	-	-		
Variation products	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation sites		0	%		-	-	-	-	-	-	-	-	-	-	-	-	-





Environmental Information

Potential environmental impact – indicators according to EN 15804+A2

			Results per functional or declared unit: 1 kg									
Indicator	Unit	A1-A3	A4	A5	C2	С3	C4	D				
GWP-total	kg CO2 eq	1,17E+01	5,06E-02	7,73E-01*	1,06E-04	3,48E-03	2,46E-03	-1,51E+00				
GWP-fossil	kg CO2 eq	1,20E+01	5,08E-02	0,00E+00	1,07E-04	3,48E-03	2,42E-03	-1,51E+00				
GWP-biogenic	kg CO2 eq	-3,15E-01	-7,08E-04	7,73E-01*	-1,02E-06	2,16E-07	4,07E-05	4,07E-04				
GWP-luluc	kg CO2 eq	1,70E-02	4,64E-04	0,00E+00	6,97E-07	5,08E-09	2,37E-06	-1,29E-03				
ODP	kg CFC-11 eq	4,10E-07	4,41E-15	0,00E+00	3,03E-17	3,01E-16	3,85E-15	-5,66E-12				
AP	mole H+ eq	5,70E-01	9,48E-05	0,00E+00	1,19E-06	5,31E-07	7,49E-06	-1,24E-02				
EP-freshwater	kg P eq	4,33E-02	1,83E-07	0,00E+00	3,06E-10	7,27E-11	3,58E-09	-2,13E-06				
EP-marine	kg N eq	3,08E-02	3,92E-05	0,00E+00	3,13E-07	8,46E-08	1,89E-06	-1,12E-03				
EP-terrestrial	mole N eq	4,18E-01	4,47E-04	0,00E+00	3,46E-06	2,48E-06	2,07E-05	-1,23E-02				
POCP	kg NMVOC eq	1,15E-01	8,44E-05	0,00E+00	8,53E-07	2,29E-07	5,92E-06	-3,61E-03				
ADP-minerals & metals	kg Sb eq	1,45E-02	3,23E-09	0,00E+00	5,79E-12	2,25E-12	6,39E-11	-2,47E-04				
ADP-fossil	MJ	2,51E+02	6,82E-01	0,00E+00	1,50E-03	5,20E-04	3,49E-02	-2,03E+01				
WDP	m3	1,13E+01	5,79E-04	0,00E+00	1,90E-06	3,19E-04	-3,14E-05	-4,11E-01				
Acronyms	and land use chang Eutrophication potend compartment; minerals&metals	ge; ODP = Depletion tential, fraction of no EP-terrestrial = Eut = Abiotic depletion p	n potential of the stra atrients reaching fres rophication potential	P-biogenic = Global Wa tospheric ozone layer; hwater end compartme l, Accumulated Exceeda sil resources; ADP-foss btion	AP = Acidification p nt; EP-marine = Eutr ance; POCP = Forma	otential, Accumulate ophication potential tion potential	ed Exceedance; EP-fr , fraction of nutrients pospheric ozone; ADI	eshwater = reaching marine P-				

^{*}NOTE: The biogenic content in packaging contributing to the GWP-biogenic is balanced out in A5 as positive as the packaging leaves the system boundary.





Use of resources

		Results per functional or declared unit: 1 kg												
Indicator	Unit	A1-A3	A4	A5	C2	С3	C4	D						
PERE	MJ	3,58E+01	4,84E-02	0,00E+00	1,88E-04	1,47E-04	3,13E-03	-4,74E+00						
PERM	MJ	1,46E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
PERT	MJ	3,72E+01	4,84E-02	0,00E+00	1,88E-04	1,47E-04	3,13E-03	-4,74E+00						
PENRE	MJ	2,06E+02	6,84E-01	0,00E+00	1,50E-03	5,20E-04	3,49E-02	-2,03E+01						
PENRM	MJ	4,63E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
PENRT	MJ	2,53E+02	6,84E-01	0,00E+00	1,50E-03	5,20E-04	3,49E-02	-2,03E+01						
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00						
FW	m3	2,75E-01	5,33E-05	0,00E+00	2,47E-07	7,49E-06	4,00E-07	-1,12E-02						
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources.													





Additional voluntary indicators

		Results per functional or declared unit: 1 kg						
Indicator	Unit	A1-A3	A4	A5	C2	C3	C4	D
GWP-GHG ²	kg CO2 eq	1,12E+01	4,92E-02	7,73E-01	1,04E-04	3,48E-03	2,31E-03	-1,48E+00
Acronyms	GWP-GHG global warming potential - greenhouse gases							

Waste and output flows

Waste

		Results per functional or declared unit: 1 kg						
Indicator	Unit	A1-A3	A 4	A5	C2	С3	C4	D
HWD	kg	4,20E-10	2,50E-12	0,00E+00	-1,92E-14	7,64E-15	2,88E-12	-2,78E-10
NHWD	kg	2,28E-01	9,86E-05	0,00E+00	3,28E-07	1,41E-05	5,00E-02	-1,91E-01
RWD	kg	1,46E-02	9,27E-07	0,00E+00	4,49E-08	1,52E-08	4,06E-07	-7,58E-04
Acronyms	HW Hazardous waste disposed; NHW Non-hazardous waste disposed; RW Radioactive waste disposed							

² The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.





Output flows

		Results per functional or declared unit: 1 kg							
Indicator	Unit	A1-A3	A4	A5	C1	C2	С3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	8,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,49E-01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-7,18E-03	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,65E-02	0,00E+00	0,00E+00
Acronyms	nyms CRU Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy								

Information on biogenic carbon content

Biogenic carbon content	Unit per DU	Amount
Biogenic carbon content in product	kg C	0
Biogenic carbon content in packaging	kg C	2,96E-01

1 kg biogenic carbon is equivalent to 44/12 kg CO2.



Disclaimers

ILCD classification	Indicator	Disclaimer
	Global warming potential (GWP)	None
ILCD Type 1	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching	Nama
	freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching	None
ILCD Type 2	marine end compartment (EP-marine)	
	Eutrophication potential, Accumulated Exceedance	None
	(EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted	2
ILCD Type 3	water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2

Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.






Additional information

Greenhouse gas emission from the use of electricity in the manufacturing phase.

Residual mix Unit		Value		
Location		Sweden		
		Nuclear: 84%		
Floatnioity miy		Hard coal: 11%		
Electricity mix		Heavy fuel oil: 2%		
		Natural gas: 2%		
Reference year		2021		
Source		European Residual Mixes 2021 - Association of Issuing Bodies		
GWP excl. Biogenic kg CO ₂ -eq. /kWh		0,037		

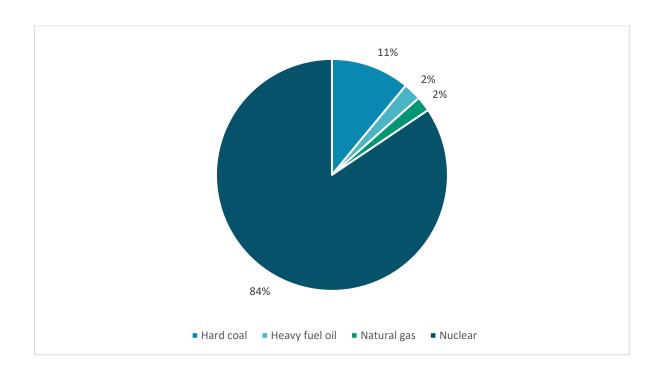





References

Association of Issuing AIB (2023) European Residual Mixes 2022. Ver. 1.0. Bodies

Construction Products EPD International (2021) PCR 2019:14 Construction products and

PCR 2019:14 version 1.2.5 construction services, version 1.2.5

EN 15804:2012+A2:2019 Sustainability of construction works - Environmental product

declaration - Core rules for the product category of construction

products

GPI General Programme Instructions of the International EPD®

System. Version 4.

ISO 14020:2000 Environmental labels and declarations — General principles

ISO 14025:2010 Environmental labels and declarations - Type III environmental

declarations - Principles and procedures

ISO 14044:2006 Environmental management - Life cycle assessment -

Requirements and guidelines

SCB – Swedish Statistics (2020) Treated waste by treatment category and waste category.

Every second year 2010 - 2020

https://www.statistikdatabasen.scb.se/pxweb/en/ssd/START__MI_

MI0305/MI0305T003/ Assessed 2023-06-19.

