

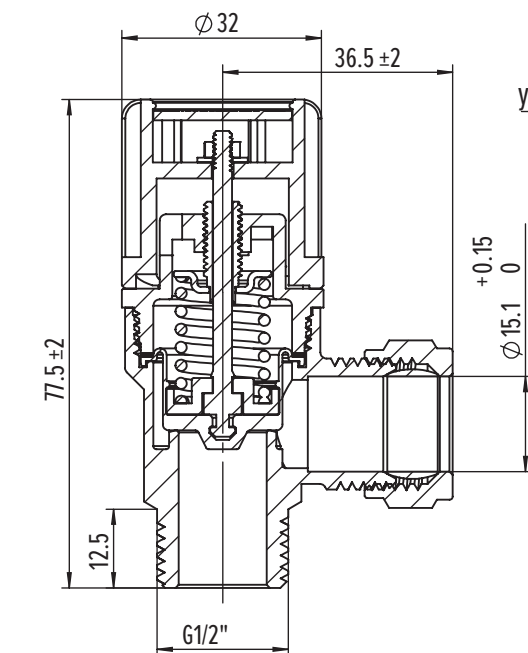




Technical data safety valves

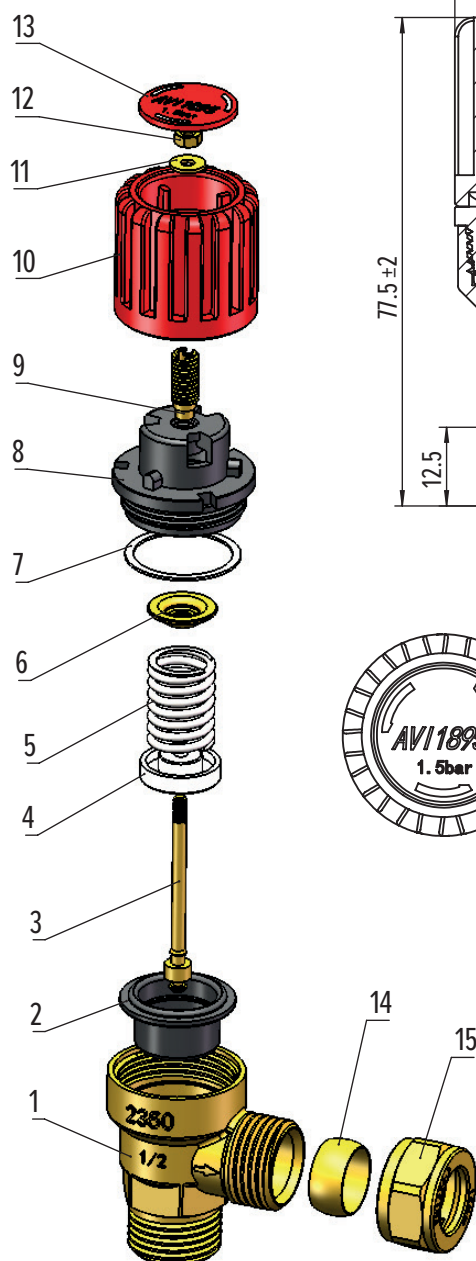

Performance:

1. Nominal pressure Pnr: 10bar
2. Temperature range: -10 C-120 C
3. Max opening pressure: Pnr + 10%
4. Min closing differential: Pnr - 25%
5. Medium: water
6. Pressure settings: 1.5-10 bar
7. PED category: IV
8. The Rubber can be used with glycol mix 50%.
9. Testing Standard: ISO4126

year+week

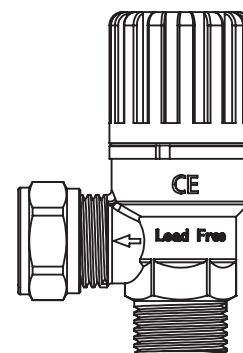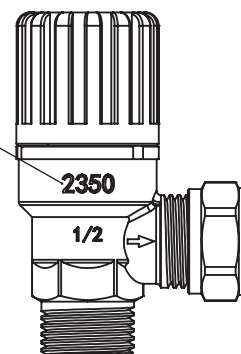

NO	Name	Material	QTY
1	Body	CW511L-S	1
2	Diaphragm	EPDM	1
3	Pull rod	CW614N	1
4	Gasket	POM	1
5	Spring	304	1
6	Gasket	CW614N	1
7	Gasket	POM	1
8	Cover	PA6+G30	1
9	Screw	CW614N	1
10	Control knob	PA6+G30	1
11	Brass disk	CW614N	1
12	Hex-nut	CW614N	1
13	Nameplate	ABS	1
14	Sleeve	H62	1
15	Sleeve nut	CW617N	1

B

SE	NO	FI	DK	Specification
5075092	1381854	3943423	10426798	1.5 Bar
5075093	1381855	3943424	10426799	2.0 Bar
5075094V	1381856	3943425	10426800	2.5 Bar

a-c
a·collection