
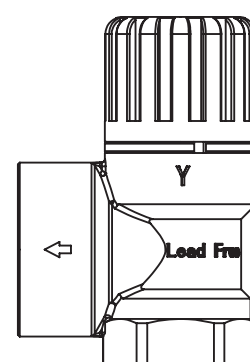
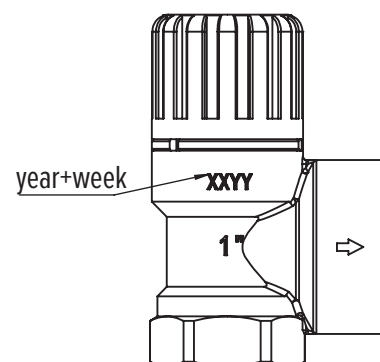

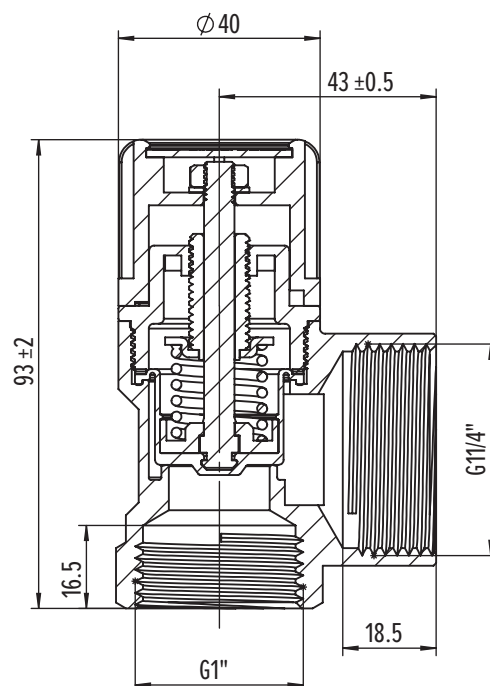


Technical data safety valves

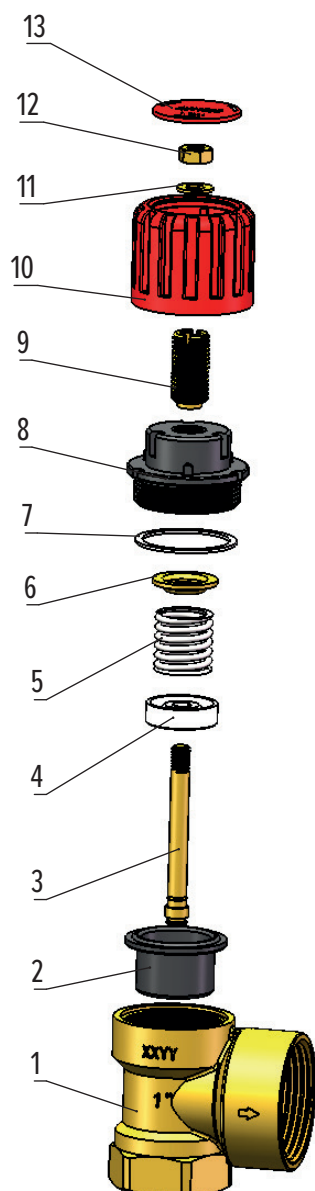

Performance:

1. Nominal pressure Pnr: 10bar
2. Temperature range: -10 C-120 C
3. Max opening pressure: Pnr + 10%
4. Min closing differential: Pnr - 25%
5. Medium: water
6. Pressure settings: 1.5-10 bar
7. PED category: IV
8. The Rubber can be used with glycol mix 50%.
9. Testing Standard: ISO4126

NO	Name	Material	QTY
1	Body	CW511L-S	1
2	Diaphragm	EPDM	1
3	Pull rod	CW614N	1
4	Gasket	POM	1
5	Spring	304	1
6	Gasket	CW614N	1
7	Gasket	POM	1
8	Cover	PA6+G30	1
9	Screw	CW614N	1
10	Control knob	PA6+G30	1
11	Brass disk	CW614N	1
12	Hex-nut	CW614N	1
13	Nameplate	ABS	1

SE	NO	FI	DK	Specification
5075101	1381863	3943432	10426807	1.5 Bar
5075102	1381864	3943433	10426808	2.0 Bar
5075103	1381865	3943434	10426810	2.5 Bar
5075104	1381866	3943435	10426809	3.0 Bar
5075105	1381867	3943436	10426813	3.5 Bar
5075106	1381868	3943437	10426811	4.0 Bar
5075107	1381869	3943438	10426814	5.0 Bar