



TBV-C



Position	Kv			
	TBV-C LF DN 15	DN 15	TBV-C NF DN 20	DN 25
1	0,05	0,22	0,40	0,80
2	0,15	0,33	0,53	1,1
3	0,22	0,45	0,67	1,3
4	0,26	0,50	0,82	1,7
5	0,31	0,60	1,0	2,2
6	0,41	0,82	1,3	2,8
7	0,53	0,99	1,7	3,5
8	0,68	1,1	2,4	4,8
9	0,74	1,4	3,0	6,1
10	0,90	1,8	3,4	7,2

Position 3-10 =

Rekomenderat område Anbefalt område Suos. alue Anbefalet indstillingsområde Recommended area Empfohlener Bereich Plage recommandée Aanbevolen gebied Rango recomendado Secção recomendada Faixa recomendada Zona raccomandata Συνιστώμενη περιοχή Рекомендованная область	Felhasználási terület Zalecany obszar Doporučená oblast Odporučana oblast Priporočeno območje Domeniu recomandat Препоръчителна област Preporučeno područje Препоручено подручје Препоручено подручје Soovitav ala Iteicamais diapazons Rekomenduojama sritis Qasam rikmandat
--	--

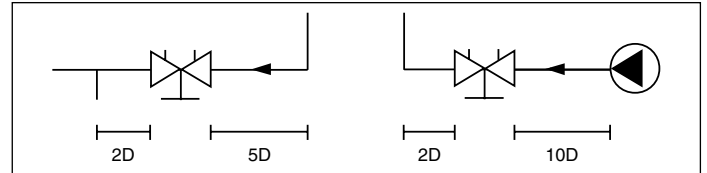

-20°C – +120°C
PN 16
(max. 16 bar)
Max Δp:
30 kPa = 0,3 bar

TBV-C + EMOT
DN 15 = 108 mm
DN 20 = 106 mm
DN 25 = 115 mm

TBV-C + EMOT:

IP54 IP54 IP54 IP54

No. 52 133-100

We reserve the right to introduce technical alterations without previous notice.