




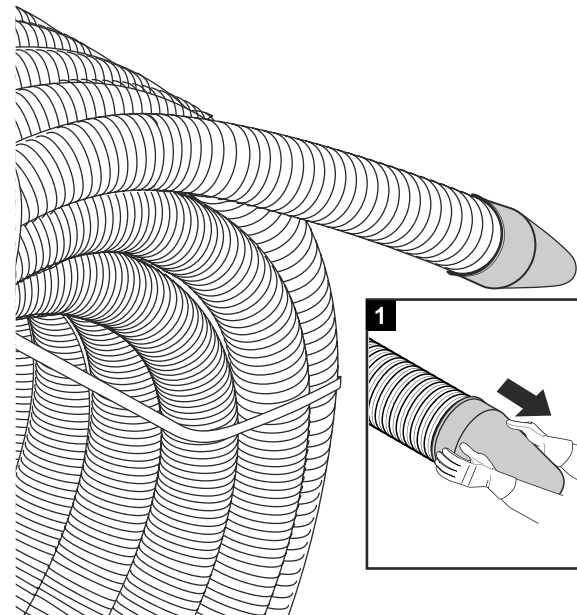









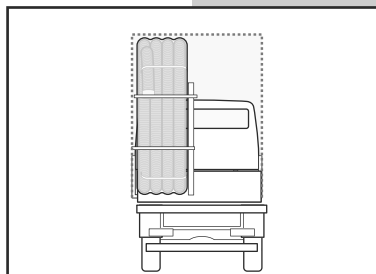












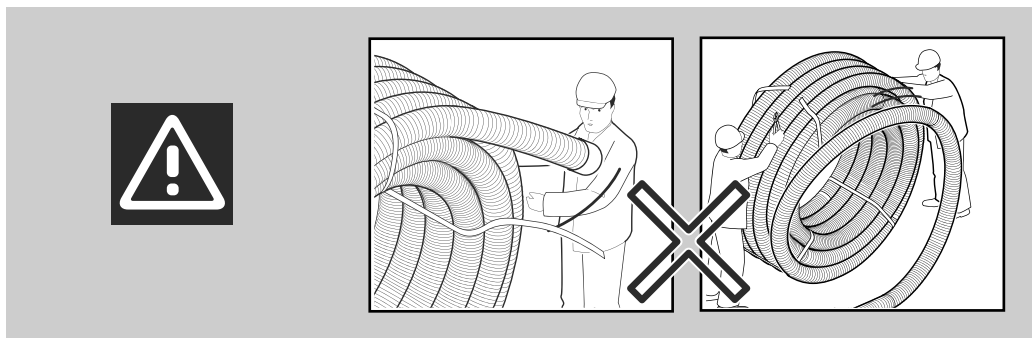




Uponor Ecoflex pipe handling



< 50 m
d = 140/145/175 mm

> 50 m d = 140/145/175 mm
≥ 50 m d = 200/250 mm



Uponor GmbH
Industriestraße 56,
D-97437 Hassfurt, Germany

1046550 03_2018_EN
Production: Uponor/ELO

Uponor training & installation videos

www.youtube.com/uponoreurope



Uponor reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.



www.uponor.com