


Installation Justerbara stosar/ Adjustable collars



Accepterad
monteringsanvisning
2026:1

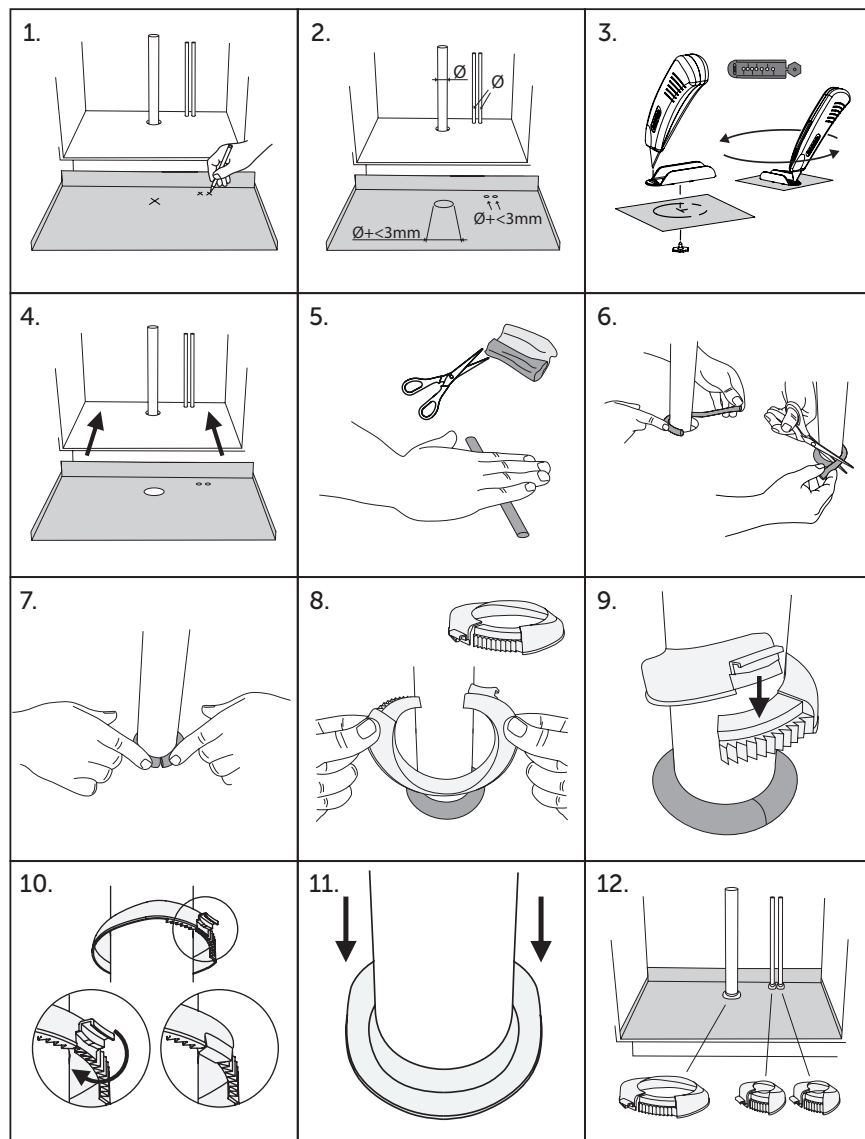

M47072511 REV 20260525

Installation Multiflextätning diskmaskinsslangar/ Multiflex Seal dishwasher hoses




Accepterad
monteringsanvisning
2026:1

SV

- Håltagning, använd hålsåg = $\varnothing$ 86 mm. Hålets placeras minst 25 mm från bak, sidovägg samt rör.
- Tryck på piggen tag ur slanghållaren.
- a) Vattenansluten maskin, b) Elsladd, c) Magnetventil, d) avloppsslang.
- e) Rätt position för magnetventilen, ventilen skall vara utanför ramen. Tryck muttern igenom gummimembranet.
- f) Pressa in magnetventilen innanför ramen och upp igenom gummimembranet. g) Klart.
- Vik elsladden, för in elsladden igenom hålet.
- Tryck sedan igenom elsladd och elkontakten.
- Tryck igenom avloppsslangen genom gummimembranet.
- För in slanghållaren, tryck fast slangar och sladd i hållaren.
- Alt 1. och 2. Saknas det slang eller el-sladd plugga hålet.
- Tryck ihop "Klick x4" genomföringen med slanghållaren. Spåret (hona) mot låsning (hane).
- Pressa ner Diaflexen i hålet.
- Skruva fast (4 skruvar) tills gummi sväller ut 2 mm utanför ramen.

ENG

- Perforation, use hole saw = $\varnothing$ 86 mm. The hole is placed at least 25 mm from the back, side wall and pipe.
- Press the spike, remove the hose holder.
- a) Machine connected to water, b) Power cord, c) Solenoid valve, d) drain hose.
- e) Correct position of the solenoid valve, the valve must be outside the frame. Press the nut through the rubber membrane.
- f) Press in the solenoid valve inside the frame and up through the rubber membrane. g) Clear.
- Fold the power cord, insert the power cord through the hole.
- Then push the power cord and the power plug through.
- Press the drain hose through the rubber membrane.
- Insert the hose holder, firmly press the hoses and cord into the holder.
- Options 1. and 2. If the hose or power cord is missing, plug the hole.
- Press together the "Click x 4" bushing with the hose holder. Slot (female) against the latch (male).
- Press the Diaflex down into the hole.
- Firmly screw (4 screws) until rubber swells 2 mm outside the frame.

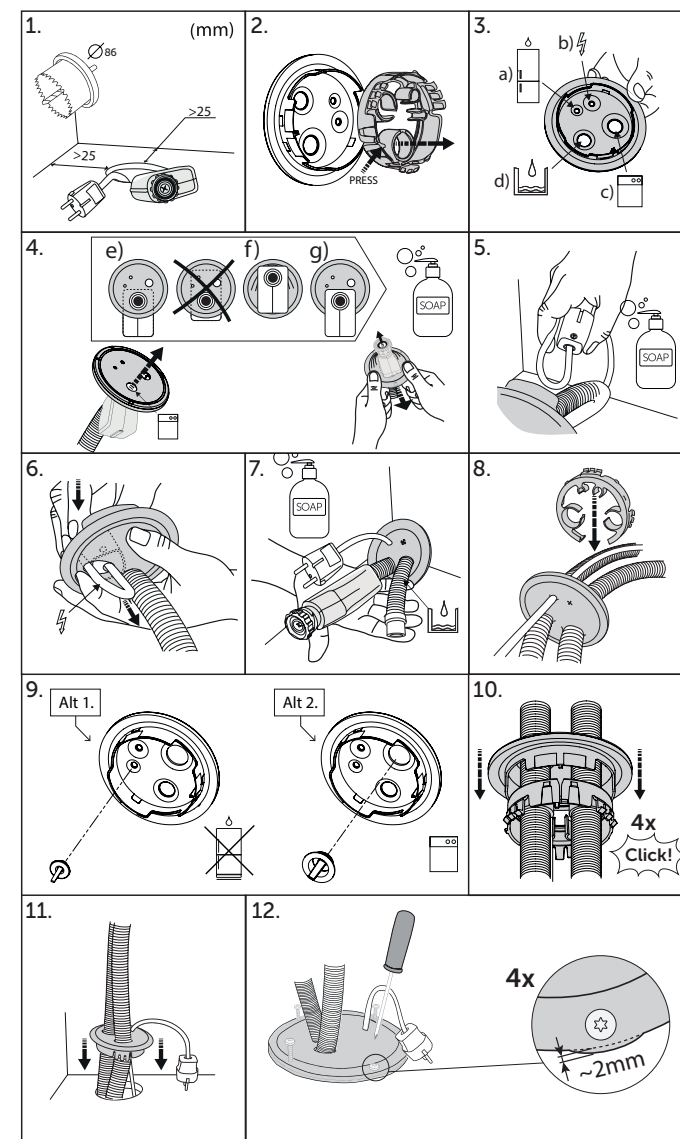



M47072512 REV 20260525

M41072501 REV 20260525

Installation Flextätning/Flexible sealing



Accepterad
monteringsanvisning
2026:1

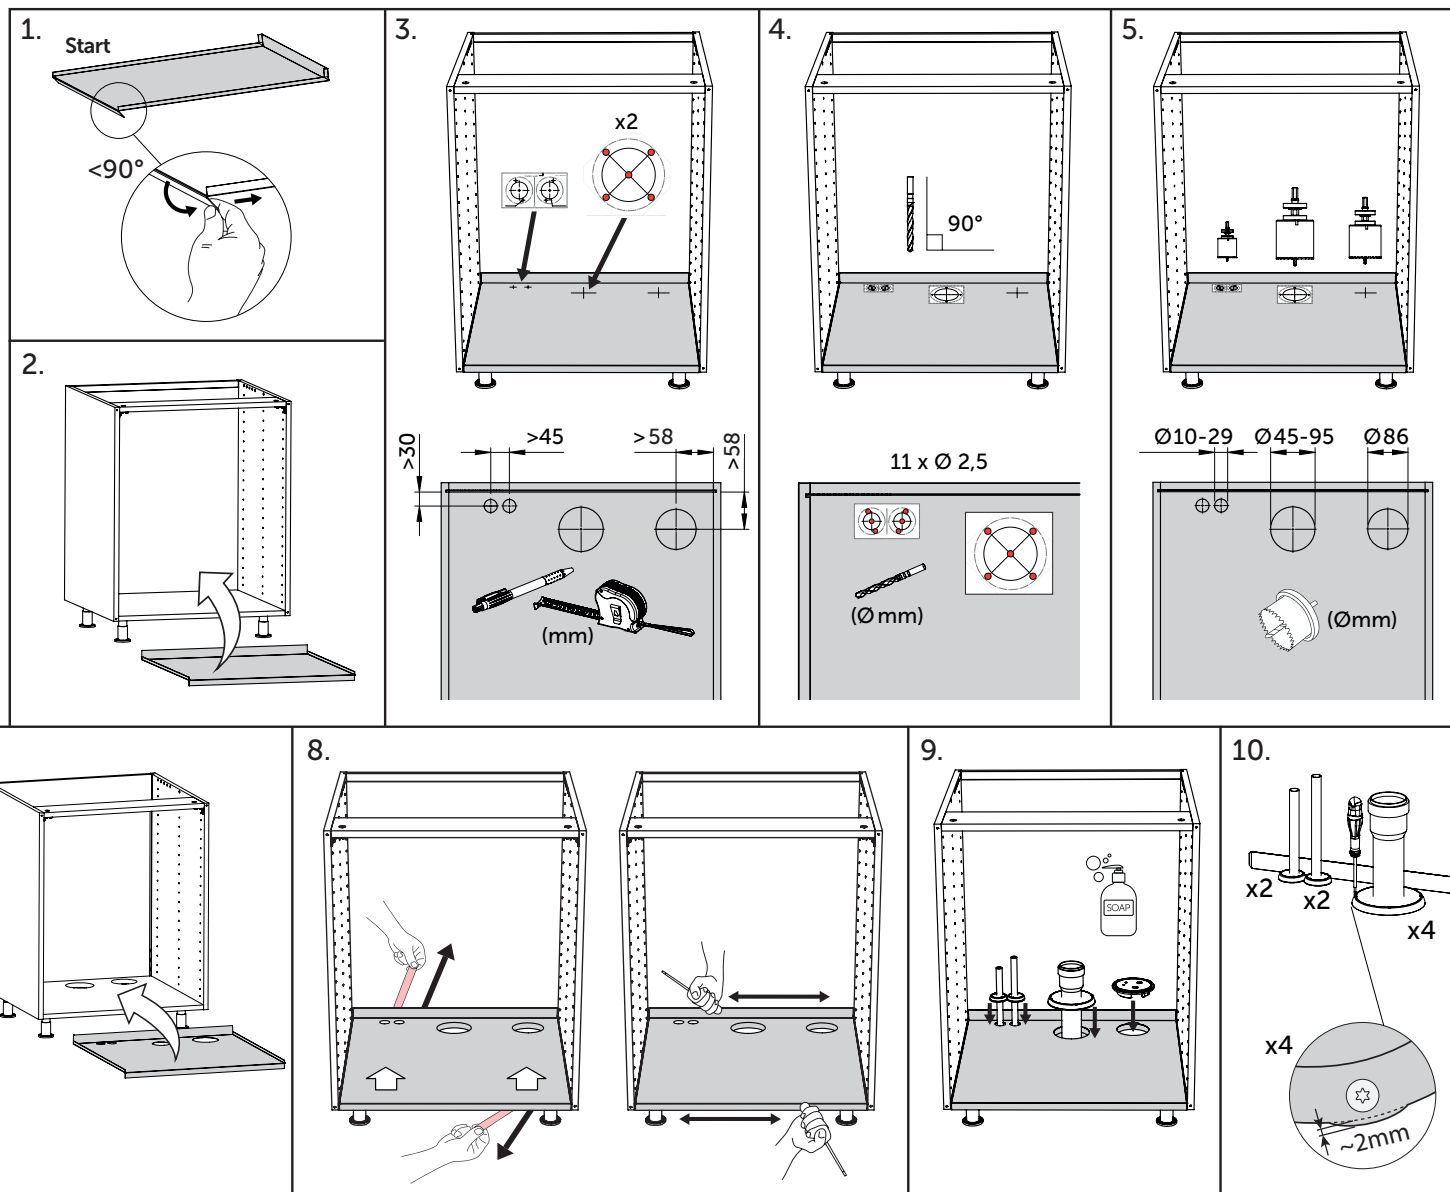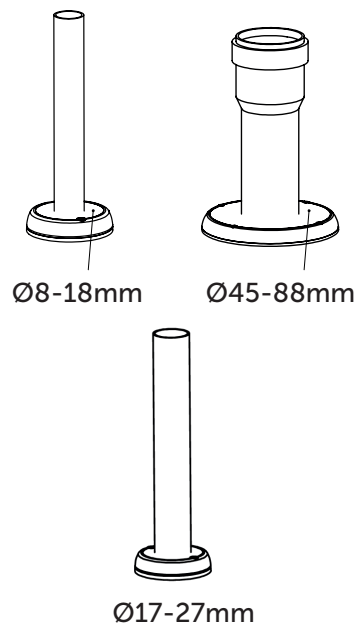

M47072513 REV 20260525