

# PV-142S Renovation fire hydrant cabinet



## Description

---

Basic model fire hydrant cabinets are manufactured from 1,25 mm steel and the reels are made from 1 mm galvanized steel. The cabinet has a welded back wall that strengthens the structure and a reinforced door. The doors open 180 degrees.

Designed for old buildings. Fits into old fire hydrant cabinet openings. The cabinet depth is 140 mm and it covers the opening. The cabinet has no back wall.

## Standard

---

Manufactured according to EN 671-1 standard specifications.

## Surface finish

---

Epoxy powder-coated

Standard colours:

- grey (RAL 7040)
- white (RAL 9016)
- red (RAL 3020)

## Hoses

---

1. Fabric surface polyester/EPDM lightweight hose. Fulfils EN 694:2001 standard.
  - Operating pressure: 1,2 MPa
  - Burst pressure: 9 MPa
2. Nitrile/PVC fire hydrant hose reinforced with polyester webbing. Fulfils EN 694:2001 Type A Class 2 standard.
  - Operating pressure: 1,2 MPa
  - Burst pressure: 4 MPa

The hose assembly is equipped with a spray nozzle.

## Reel

---

The reels are painted red. The hub of the reel is made from a special pressure-tested brass casting. The reel is equipped with a spring-reinforced feed hose, a Handifighter nozzle and a 1" shut off valve.

## Lock

---

The door is equipped with a special lock that is shielded by a breakable protective glass (picture on the right).

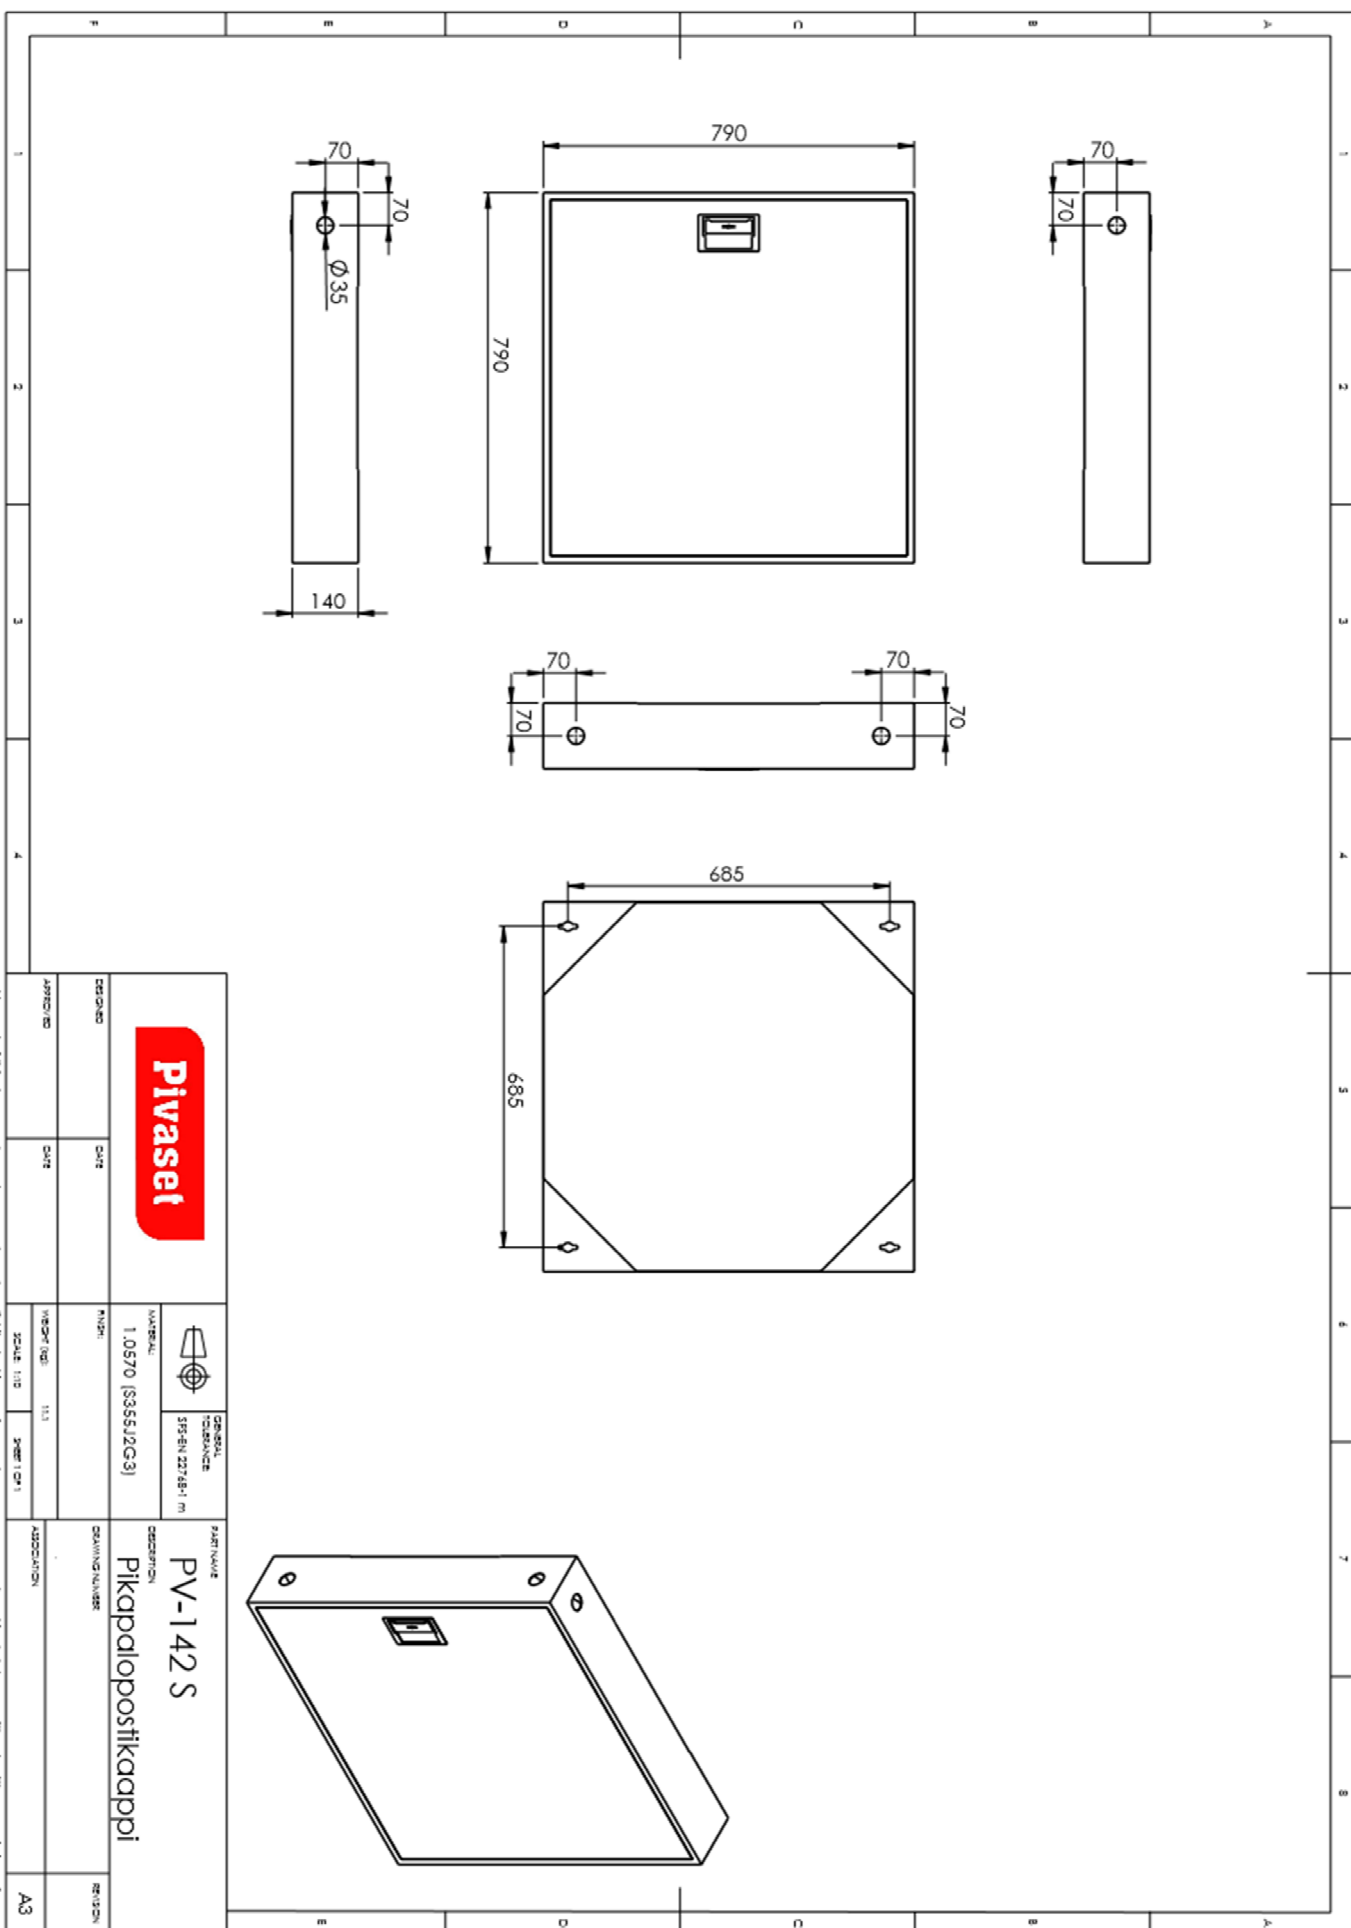


## Hose size alternatives



---

<b>Code</b>	<b>Model</b>	<b>Size</b>
2953384	PV-142S	19 mm/30 m
29543387	PV-142S	25 mm/20 m

# Dimensions



**Pivaset**

DESIGNED	DATE	SCALE	1:1	1:1	SCALE 1:1	3000	3000
				GENERAL TOLERANCES 3000-EN/22748-1 m		PART NAME <b>PV-142 S</b>	
MATERIAL 1.0570 (S355J2G3)		FINISH 11.1		DESCRIPTION Pikapalopositikkappi		DRAWING NUMBER APPLICATION	
APPROVED	DATE	SCALE	1:1	1:1	SCALE 1:1	3000	3000
No part of this document may be reproduced or distributed in any form or by any means, or stored in database, without written permission of owner.							REVISION A3