
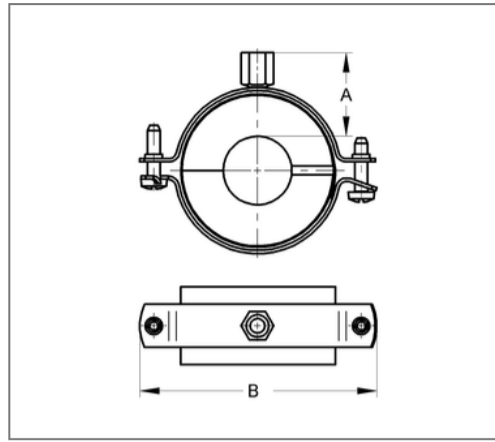


■ Insulated pipe clamp Husky II 13 28 mm Insulation 12 M8/M10

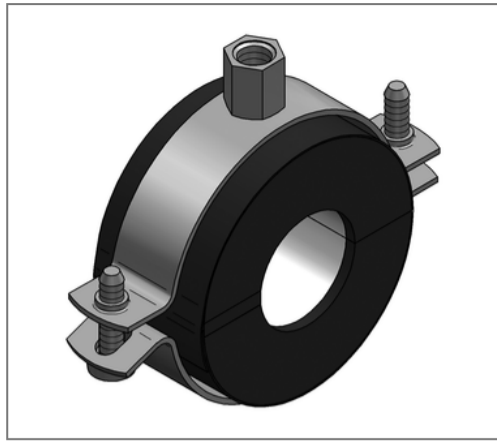

Commercial details

Part no.	6830280
EAN/GTIN	4250928440433
Packing unit	12 pcs
Price unit	1
Quantity unit	pcs
Weight	0,0921 kg/pc
Product group	06-683

QR code



Certification



Specification

Application area	A thermal decoupled mounting of tubes guarantees a reliable prevention of condensate for refrigeration, air-conditioning and drinking water technologies in the sector pipe-clamping
Insulation body	KA/PU

Technical data

Material	Steel
Material type	DD11
Material coat	Plastic
Surface	galvanized
Class	B2
min. temperature resistance	-45 °C
max. temperature resistance	105 °C
Thermal conductivity	0.029 W/mK
Density core	120 kg/m ³
Water vapour diffusion resistance	7000 μ

Product details

Connection	M8/M10
Connection height	32 mm
Width	88 mm
Insulation thickness	12 mm
load Fz	0.19 kN
Shell length	36 mm
statical load core	0.27 N/mm ²