


■ Profile rail C-profile Stex 35 / 20 / 0,8 mm L= 3 m pre-galv.

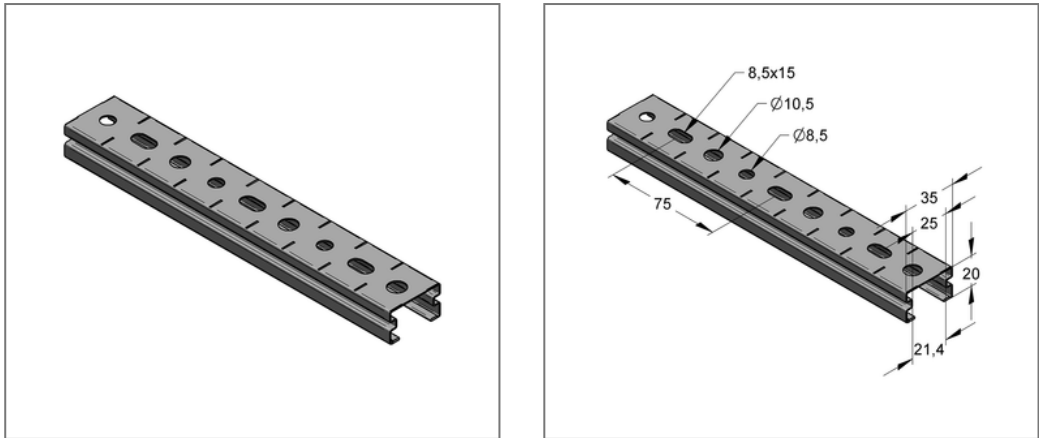

Commercial details

Part no.	1273523
EAN/GTIN	4250928424426
Packing unit	54 m
Bundle	504 m
Quantity unit	m
Weight	0,640 kg/m
Product group	02-127
Price unit	1

QR code



Certification



Specification

Application area	lightweight profile rail with quick connection option.
Specification	Marking for fit-up aid and to cut rails
Type of attachment	glide fast connection

Technical data

Material	Steel
Material type	S250
Surface	pre-galvanized

Product details

Width	35 mm
Height	20 mm
Thickness	0,8 mm
Length	3 m
Hole-Ø	8,5 mm
Hole diameter 1	8,5 mm
Hole diameter 2	10,5 mm
Elongated hole	8.5x15 mm
Area (least cross section of the profile rail)	0,74 cm²
Axial angular impulse ly	0,4 cm4
Axial angular impulse lz	1,53 cm4
Grid dimension	25 mm
Rail slot width	21 mm
Centroid distance eo	0,97 cm
Centroid distance eu	1,03 cm

Remark

Notice	Full bundles, only
Elastic limit	250 N/mm ²
Radius of inertia i_y	0,74 cm
Radius of inertia i_z	1,44 cm
Section modulus W_y	0,39 cm ³
Section modulus W_z	0,87 cm ³