

VAM RG TL

Valve tapping saddle top-loading with HD-PE/gunmetal adapter

Valve tapping saddle with HD-PE/gunmetal adapter VAM RG TL

- Gas, water
- Maximum pressure: Water 16 bar, Gas 10 bar
- Material: PE 100 and gunmetal (female thread)
 - Universal clamping option (top loading):
 - Safe clamping with FRIATOP
- Safety technology
- Metals in contact with water according to UBA (Federal Environment Agency, Germany) recommendation


Note:

Can only be used with the clamping device FRIATOP (Order No. 613350).

For accommodating commercially available brass valves.

Dimension range d 250 – d 560 can be fused as standard in the top loading process.

As a complete solution, we recommend our DAV tapping valve.

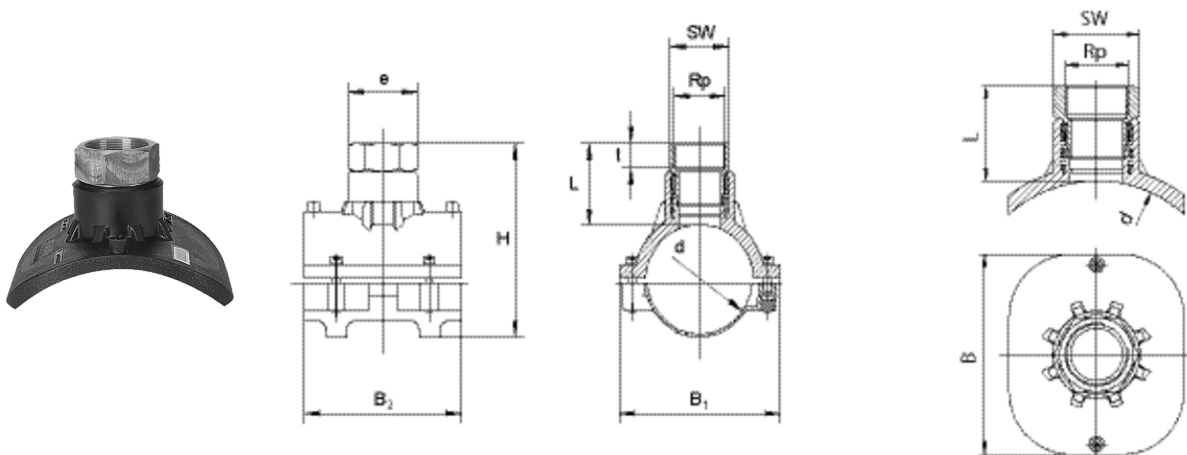

PE 100 SDR 11

Maximum permissible working pressure 16 bar (water) / 10 bar (gas)



Reference	d	Rp	B	L	t	Weight kg	BX	PU
615470	250 - 560	2"	200	90	27	1,505	8	144