



5761G Oras Care - Duschblandare och utloppspip

EAN: 6414150098529 static.oras.com/5761G

Thermostatic shower faucet with spout and ergonomic drop shape handles. Temperature handle equipped with safety stop at 38°C. Volume handle with diverter and EcoFlow control. The faucet includes litter filters and non-return valves.

- Duschlösningar
- Vård & omsorg
- Termostatblandare
- Väggmonterad
- Krom
 - Fast utloppspip

- CASCADE® stråle
- Temperaturvred, Flödesvred, Eco funktion för vattenflöde
- Vridomkastare, Integrerad i vredet för flödeskontroll
 - Säkerhetsspärr mot skållning vid 38°C

G 3/4

52

75

145


- Direkt anslutning
- Retrofit safety lock against scalding. Limiter adjustable between 38°-42°C during mounting.

Teknisk data

löde vid 300 kPa	0.25 l/s		
kniska egenskaper		500 kPa	
armvattenanslutning	max. +80°C	600 kPa 6 bar	
betstryck	100 - 1000 kPa	500 kPa	
nslutning, mått	G3/4	5 bar	
stallationsmått	CC150± 3 mm		
Naterial	brass	400 kPa 4 bar	
estämmelser		300 kPa 3 bar	
N standard	EN 1111	3 561	
judklass	I (ISO 3822)	200 kPa	
		2 bar	
		100 kPa	
		1 bar	
		Q (l/min) 0 6 12 18 Q (l/s) 0 0.1 0.2 0.3	24 31 0.4 0.5
		Q(l/min) 0 6 12 18 Q(l/s) 0 0.1 0.2 0.3	0.4 0.5



Reservdelar

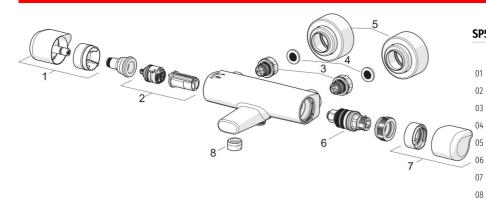

SP5762G

	Namn	Kod	RSK		
	Flödesratt	1006584V			
	Omkastare/reglerkassett	601278V	8443265		
	Anslutning	602438/2			
ł	Smutsfilter, G3/4, DN20	178375V	8443264		
i	Täckfläns	1006473V			
ò	Termostat/reglerkassett	178780V	8592310		
	Temperaturratt	1005875V			
3	Strålsamlare, M24x1 uk	600654V			