


Range : Timed flow toilette flushvalve

Ref : 14109 - PRESTO 1000M

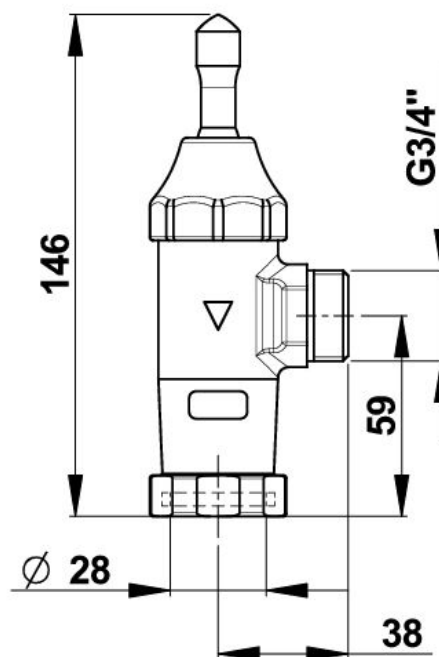

> Dynamic working pressure :

- 1 to 5 bars

> Volume of water delivered :

- 6 to 9 l, adjustable thanks to a stop valve (not integrated)
- Anti-water-hammering device

> Flow time :

- 7 to 9 seconds

> Functionality :

- Simple press on the omnidirectional lever handle to activate the water flow

> Hydraulic supply :

- Right or left square M G 3/4" (20/27)
- Outlet connection on flush pipe \varnothing 28 mm

> Material and plating :

- Brass body with nickel-chrome plated

> Security :

- Anti-siphon device to prevent pollution of the water network from backflow

> Delivered with :

- Compression washers for pipes dia. 28mm
- Installation instruction

> Standards & Approvals :

- Brass body in accordance with EN1982 / EN12164 / EN12165
- Nickel-Chrome plated body in accordance with EN12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

This document is not contractual. We reserve the right to modify the characteristics of our products without notice in advance. All our brands and models are registered trade marks.

