

Pipe Loop RSL N

Group: 1115

Application

For pipeline installations of fixed fire extinguishing systems, mainly used for Sprinkler systems.

Scope of delivery

Pipe Loop with rounded edges. Flange nuts and cup nuts are included in loose form.

Technical Data


Type	Nominal load [kN]
26.9 - 60.3	2.0
76.1 - 114.3	3.5
133 - 168.3	5.0
219.1	8.5

Material: Steel, galvanised as per DIN EN 10346

Approvals / Compliance

FM and VdS (No. G4850025) approved

The types from size 76,1 (2 1/2") onward have an FM- as well as an VdS-approval.

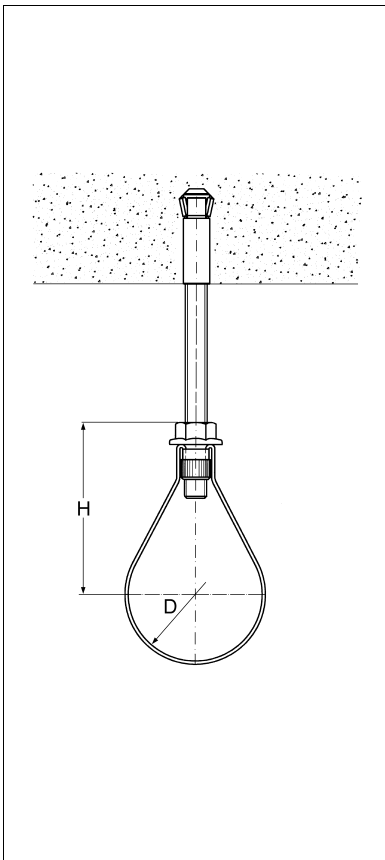

Type	NB	Connection	D [mm]	H [mm]	W [kg]	Quantity [pack]	Part number
26.9	3/4"	M8 (VdS)	27	65	0.05	100	113336
33.7	1"	M8 (VdS)	34	65	0.05	100	102287
42.4	1 1/4"	M8 (VdS)	43	65	0.05	50	102296
48.3	1 1/2"	M8 (VdS)	49	70	0.06	50	102302
60.3	2"	M8 (VdS)	61	79	0.06	50	102311
26.9	3/4"	M10 (FM)	27	65	0.05	100	113414
33.7	1"	M10 (FM)	34	65	0.06	100	102126
42.4	1 1/4"	M10 (FM)	43	65	0.06	50	102135
48.3	1 1/2"	M10 (FM)	49	70	0.06	50	102144
60.3	2"	M10 (FM)	61	79	0.07	50	102153
76.1	2 1/2"	M10	77	98	0.14	25	102320
88.9	3"	M10	90	113	0.16	25	102339
108		M10	110	142	0.19	25	102348
114.3	4"	M10	115	142	0.19	25	102357
133		M12	135	155	0.22	25	102366
139.7	5"	M12	142	155	0.22	25	102375
159		M12	161	185	0.25	25	102384
168.3	6"	M12	170	185	0.26	25	102393
219.1	8"	M16	221	239	0.56	10	102409