

## Speed Nut NT CC 41 HCP

Group: 1814

### Application

In particular useful for installation in vertical channels or places of difficult access.

Further advantages:

- ◆ For all Sikla Channels MS 41, independent of the channel's height.
- ◆ No getting stuck on bolt heads when sliding in the channel.
- ◆ No appearance of settlement after tightening.


### Scope of delivery

Channel Nut and Spring are tightly connected.

### Installation

After inserting the Speed Nut into the channel opening, it is turned to the right as far as it will go by exerting slight pressure on it; deinstallation may be effected by following the instructions on the reverse order.

Installation and deinstallation do not require tools and may be repeated several times.

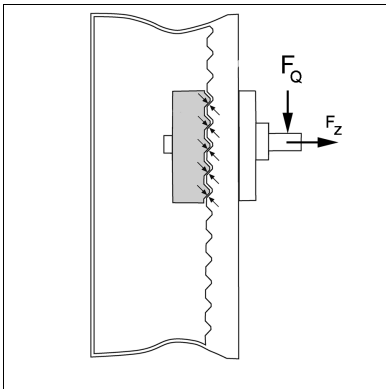

### Technical Data

	M6	M8	M10	M12
Tightening torque 8.8 <sup>1)</sup> [Nm]	10	25	40	80

<sup>1)</sup> Using lower steel classes, the value are to be reduced accordingly.


Channel thickness [mm]	M6	M8	M10	M12	M6	M8	M10	M12
	FZ ≤ [kN]	FZ ≤ [kN]	FZ ≤ [kN]	FZ ≤ [kN]	FQ ≤ [kN]	FQ ≤ [kN]	FQ ≤ [kN]	FQ ≤ [kN]
1.5	3.0	3.0	3.0	7.5	0.7	1.8	2.9	7.5
2.0	3.2	5.8	5.8	10	0.9	2.1	3.4	9
2.5	3.2	5.8	5.8	11	1.0	2.6	4.1	9
3.0	3.2	5.8	5.8	13	1.1	2.8	4.4	9

Note: The permissible load capacities of the channels are to be respected.

Material:

CC-Channel Nut: Steel class, HCP

Spring washer: Sheet metal spring steel, rustproof

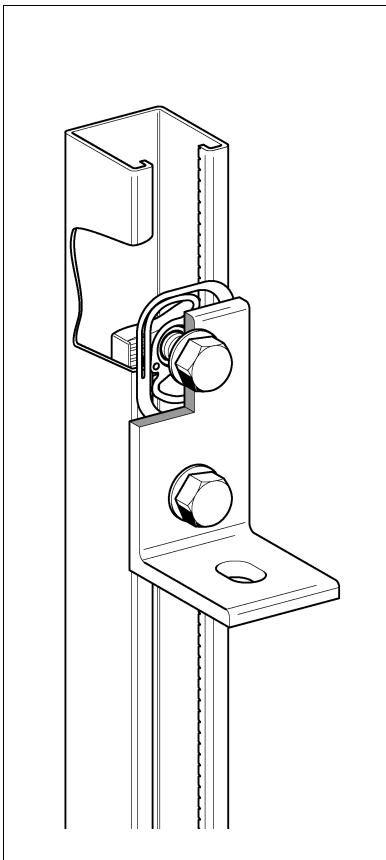

Type	W [kg]	Quantity [pack]	Part number
CC 41-M6	0.03	50	<b>198698</b>
CC 41-M8	0.03	50	<b>198650</b>
CC 41-M10	0.03	50	<b>186284</b>
CC-41 M12	0.06	50	<b>110015</b>