

## Overview



SITRANS LVS200 is a vibrating point level switch for high, low, or demand level detection of bulk solids.

## Benefits

- High resistance to mechanical forces
- Strong vibration resistance to high bulk material loads
- Rotatable enclosure for convenient wiring
- Suitable for low density material: standard version, 20 g/l (1.3 lb/ft<sup>3</sup>); liquid/solid interface version, 50 g/l (3 lb/ft<sup>3</sup>) and low density option min. 5 g/l (0.3 lb/ft<sup>3</sup>)
- Customer desired extensions up to 20 000 mm (787 inch)
- Optional detection of solids within liquid
- Durable short fork option with 165 mm (6.5 inch) insertion length

## Application

The standard LVS200 detects high, low, or demand levels of dry bulk solids in bins, silos, or hoppers. The liquid/solid interface version can also detect settled solids within liquids or solids within confined spaces such as feed pipes. It is designed to ignore liquids in order to detect the interface between a solid and a liquid.

A pipe extension version is available with either the standard or liquid/solid interface electronics and fork, separated by a customer supplied 1 inch pipe.

SITRANS LVS200 has an optional 4 to 20 mA output for monitoring buildup on the fork to determine when preventative maintenance should be performed in sticky applications.

The LVS200 has a compact design and can be top, side or angle mounted. The vibrating fork design ensures the tines are kept clean. The unique design of the fork and crystal assembly eliminates false high level readings even if tines become damaged.

A signal from the electronic circuit excites a crystal in the probe causing the fork to vibrate. If the fork is covered by material, the change in vibration is detected by the electronic circuitry which causes the relay to change state after a one second delay. When the fork is free from material pressure, full vibration resumes and the relay reverts to its normal condition.

- Key Applications: dry bulk solids in bins, silos, hoppers or settled solids within liquids (interface version)

## Level Measurement

### Point level measurement - Vibrating switches


#### SITRANS LVS200

#### Technical specifications

<b>Mode of operation</b>	
Measuring principle	Vibrating point level switch
<b>Input</b>	
Measured variable	High, low, and demand
Measuring frequency	
• Standard	125 Hz
• Liquid/solid interface and short fork version	350 Hz
<b>Output</b>	
PNP	Open collector: Permanent load max. 0.4 A, short-circuit and overload protected Turn-on voltage: max. 50 V (reverse protection)
2-wire without contact	Load current: • Min. 10 mA • Max. 500 mA permanent • Max. 2A < 200 ms • Max. 5A < 50 ms  Voltage drop on the electronic module: max. 7 V with closed electric circuit  Cut-off current with open electric circuit: max. 5 mA
Relays	
• Version with 1 relay	SPDT relay
• Version with 2 relays	DPDT relay
Relay delay	• From loss of vibration: approximately 1 second • From resumption of vibration: approximately 1 ... 2 seconds
Signal delay	• Probe uncovered to covered: approximately 1 second • Probe covered to uncovered: approximately 1 ... 2 seconds
Relay fail-safe	High or low, switch selectable
Alarm output	• Relay 8 A at 250 V AC, non-inductive • Relay 5 A at 30 V DC, non-inductive
mA output	8/16 mA or 4 ... 20 mA
• Resolution	4 ... 20 mA ± 0.1 mA
<b>Sensitivity</b>	
	High or low, switch selectable
<b>Rated operating conditions</b>	
Installation conditions	
• Location	Indoor/outdoor
Ambient conditions	
• Ambient temperature	-40 ... +60 °C (-40 ... +140 °F)
• Installation category	III
• Pollution degree	2

Medium conditions	
• Process temperature	<ul style="list-style-type: none"> <li>All except CSA Class II, Group G: -40 ... +150 °C (-40 ... +302 °F)</li> <li>CSA Class II, Group G: -40 ... +140 °C (-40 ... +284 °F), CSA temperature code T3B</li> </ul>
• Max. threaded bushing temperature	60 °C (140 °F)
• Max. enclosure surface temperature (Category 2D)	90 °C (194 °F)
• Max. extension surface temperature (Category 1D)	150 °C (302 °F)
• Pressure (vessel)	Max. 10 bar g (145 psi g) European Pressure Directive 2014/68/EU: Category 1
• Minimum material density	<ul style="list-style-type: none"> <li>Standard version: approx. 20 g/l (1.2 lb/ft<sup>3</sup>)</li> <li>Liquid/solid interface version: approx. 50 g/l (3 lb/ft<sup>3</sup>)</li> <li>Optional low density version: approx. 5 g/l (0.3 lb/ft<sup>3</sup>)</li> </ul>
<b>Design</b>	
Material	
• Enclosure	Epoxy coated aluminum
Process connection	<ul style="list-style-type: none"> <li>Thread 1½" NPT [(Taper), ANSI/ASME B1.20.1], R ½" [(BSPT), EN 10226], and flange options</li> <li>Optional sliding bushing with 2" NPT [(Taper), ANSI/ASME B1.20.1] or BSP thread</li> <li>Thread material: stainless steel 303 (1.4301)</li> </ul>
Tine material	Stainless steel 316L (1.4404), PTFE-coated tines are available upon special request
Degree of protection	IP65/Type 4/NEMA 4
Conduit entry	2 x M20 x 1.5 or 2 x ½" NPT
Weight	<ul style="list-style-type: none"> <li>Standard version, no extensions: approx. 2.0 kg (4.4 lb)</li> <li>Solids/liquids version, no extensions: approx. 1.9 kg (4.2 lb)</li> </ul>
<b>Power supply</b>	
	<ul style="list-style-type: none"> <li>19 ... 230 V AC, +10 %, 50 ... 60 Hz, 8 VA</li> <li>19 ... 55 V DC, +10 %, 1.5 W</li> </ul>
<b>Certificates and approvals</b>	
	<ul style="list-style-type: none"> <li>CSA/FM General Purpose</li> <li>CE</li> <li>CSA/FM Dust Ignition Proof</li> <li>RCM</li> <li>ATEX II 1/2 D</li> <li>CSA/FM IS Class I, II, III Div. 1, Groups A, B, C, D, E, F, G, FM Class I, Aex ia IIC, CSA Class I, Ex ia IIC, available only with power supply options 5 and 6</li> <li>ATEX II 1G and 1/2 G Eex ia IIC; ATEX II 1D and 1/2 D, available only with power supply option 5</li> </ul>

Selection and Ordering data	Article No.
<b>SITRANS LVS200, standard</b> SITRANS LVS200 is a vibrating point level switch for high, low, or demand level detection of bulk solids.	<b>7ML5731-</b> A 0
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
<b>Power supply</b>	
19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT) <sup>1)</sup>	1
19 ... 230 V AC, 19 ... 55 V DC, two relay outputs (DPDT) <sup>1)</sup>	2
18 ... 50 V DC PNP <sup>1)</sup>	3
19 ... 230 V AC/DC without contact, 2-wire loop powered <sup>1)</sup>	4
7 ... 9 V DC (requires NAMUR switch amplifier) NAMUR IEC 60947-5-6, 2-wire <sup>2)</sup>	5
8/16 mA or 4 ... 20 mA; 12.5 ... 35 V DC, 2-wire <sup>3)</sup>	6
19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT) basic version <sup>4)5)</sup>	7
<b>Process temperature</b>	
Without temperature isolator	A
With temperature isolator	B
Separated enclosure - cable length 1.5 m (4.92 ft) [max. temperature process 150 °C (302 °F)/ max. temperature electronics 60 °C (140 °F)]	C
Separated enclosure - cable length 4.0 m (13.12 ft) [max. temperature process 150 °C (302 °F)/ max. temperature electronics 60 °C (140 °F)]	D
<b>Process connection</b>	
<b>Threaded</b>	
R 1½" [(BSPT), EN 10226]	A
1½" NPT [(Taper), ANSI/ASME B1.20.1]	B
G 2" [(BSPP), EN ISO 228-1], sliding sleeve [min. length 500 mm (19.69 inch)] <sup>6)</sup>	C
2" NPT [(Taper), ANSI/ASME B1.20.1], sliding sleeve [min. length 500 mm (19.69 inch)] <sup>6)</sup>	D
<b>Flanged</b>	
DN 100 PN 6, EN 1092-1 <sup>7)</sup>	E
DN 100 PN 16, EN 1092-1	F
2" ASME 150 lb B16.5	G
3" ASME 150 lb B16.5	H
4" ASME 150 lb B16.5	J
2" Tri-clamp (DN 50) ISO 2852	K
<b>Extension length</b>	
Stainless steel 304 (1.4301)	
Standard length, 235 mm (9.25 inch)	11
Add Order code Y01 and plain text: "Insertion length ... mm"	
• 300 ... 500 mm (11.81 ... 19.69 inch)	12
• 501 ... 750 mm (19.72 ... 29.53 inch)	13
• 751 ... 1 000 mm (29.57 ... 39.37 inch)	14
• 1 001 ... 1 250 mm (39.41 ... 49.21 inch)	15
• 1 251 ... 1 500 mm (49.25 ... 59.06 inch)	16
• 1 501 ... 1 750 mm (59.09 ... 68.90 inch)	17
• 1 751 ... 2 000 mm (68.94 ... 78.74 inch)	18
• 2 001 ... 2 250 mm (78.78 ... 88.58 inch)	21
• 2 251 ... 2 500 mm (88.62 ... 98.43 inch)	22
• 2 501 ... 2 750 mm (98.46 ... 108.27 inch)	23
• 2 751 ... 3 000 mm (108.31 ... 118.11 inch)	24
• 3 001 ... 3 250 mm (118.15 ... 127.95 inch)	25
• 3 251 ... 3 500 mm (127.99 ... 137.80 inch)	26
• 3 501 ... 3 750 mm (137.83 ... 147.64 inch)	27
• 3 751 ... 4 000 mm (147.68 ... 157.48 inch)	28


Selection and Ordering data	Article No.
<b>SITRANS LVS200, standard</b> SITRANS LVS200 is a vibrating point level switch for high, low, or demand level detection of bulk solids.	<b>7ML5731-</b> A 0
Stainless steel 316L (1.4404)	
Standard length, 235 mm (9.25 inch)	31
Add Order code Y01 and plain text: "Insertion length ... mm"	
300 ... 500 mm (11.81 ... 19.69 inch)	32
501 ... 750 mm (19.72 ... 29.53 inch)	33
751 ... 1 000 mm (29.57 ... 39.37 inch)	34
1 001 ... 1 250 mm (39.41 ... 49.21 inch)	35
1 251 ... 1 500 mm (49.25 ... 59.06 inch)	36
1 501 ... 1 750 mm (59.09 ... 68.90 inch)	37
1 751 ... 2 000 mm (68.94 ... 78.74 inch)	38
2 001 ... 2 250 mm (78.78 ... 88.58 inch)	41
2 251 ... 2 500 mm (88.62 ... 98.43 inch)	42
2 501 ... 2 750 mm (98.46 ... 108.27 inch)	43
2 751 ... 3 000 mm (108.31 ... 118.11 inch)	44
3 001 ... 3 250 mm (118.15 ... 127.95 inch)	45
3 251 ... 3 500 mm (127.99 ... 137.80 inch)	46
3 501 ... 3 750 mm (137.83 ... 147.64 inch)	47
3 751 ... 4 000 mm (147.68 ... 157.48 inch)	48
<b>Material process connection/extension</b>	
Stainless steel threads 304 (1.4301), flanges 321 (1.4541), Tri-clamp 304 (1.4301) <sup>8)</sup>	1
Stainless steel 316L (1.4404) <sup>9)</sup>	2
<b>Approvals</b>	
CSA/FM Dust Ignition Proof, RCM	A
ATEX II 1/2 D, RCM	B
CSA/FM General Purpose, RCM, CE	C
CE, RCM	D
CSA/FM IS Class I, II, III Div. 1, Groups A, B, C, D, E, F, G, FM Class I, Aex ia IIC, CSA Class I, Ex ia IIC, RCM	E
ATEX II 1G and 1/2G Eex ia IIC; ATEX II 1D and 1/2D, RCM	F
IEC-Ex t IIIC Da/Db	G
EAC Ex ta/tb IIIC Da/Db, Ex ta IIIC Da	H
EAC Ex Ga/Gb Ex ia IIC, 0Ex ia IIC Ga; Ex ta/tb IIIC Da/Db, Ex ta IIIC Da	J
1) Available with Approval options A ... D, G only	
2) Available with Approval options D, E, F only	
3) Available with Approval options B, D, G only	
4) Available with configurations 7ML5731-7AA11-1BA0 or 7ML5731-7AB11-1AA0 only	
5) Basic version is cost effective and offers fast delivery	
6) Not available with extension length options 11, 12, 31, 32	
7) Max. 6 bar (87 psi)	
8) Available with option extension length 11 ... 28	
9) Available with option extension length 31 ... 48	
• We can offer shorter delivery times for configurations designated with the Quick Ship Symbol  . For details see page 10/11 in the appendix.	
▶ Available ex stock. For details see page 10/11 in the appendix.	

## Level Measurement

### Point level measurement - Vibrating switches

#### SITRANS LVS200

4

Selection and Ordering data	Order code	Selection and Ordering data	Article No.
<b>Further Designs</b> Please add <b>"-Z"</b> to Article No. and specify Order code(s).		<b>SITRANS LVS200, short fork for liquids/solids interface</b> Vibrating point level switch for solids or solids within liquid interface applications, and high load applications with short insertion requirements 	<b>7ML5732-7AA11-1BA0</b>
Total insertion length: Enter the total insertion length in plain text description, max. 4 000 mm (157.48 inch)	<b>Y01</b>	Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Stainless steel tag [100 x 45 mm (3.94 x 1.77 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	<b>Y14</b>	<b>Power supply</b>	
Enhanced sensitivity > 5 g/l via electronics and increased insertion length of 25 mm (0.98 inch) <sup>3)</sup>	<b>K05</b>	19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT) <sup>6)</sup>	<b>1</b>
Enhanced sensitivity < 5 g/l via electronics, increased insertion length of 25 mm (0.98 inch), and increased aluminum fork width <sup>1)3)</sup>	<b>G01</b>	19 ... 230 V AC, 19 ... 55 V DC, two relay outputs (DPDT) <sup>6)</sup>	<b>2</b>
Signal bulb inserted in M20 cable gland <sup>2)</sup>	<b>A20</b>	18 ... 50 V DC PNP <sup>6)</sup>	<b>3</b>
NAMUR 8/16 mA switch amplifiers available, contact factory for pricing		19 ... 230 V AC/DC without contact, 2-wire loop powered <sup>6)</sup>	<b>4</b>
		8/16 mA or 4 ... 20 mA; 12.5 ... 35 V DC, 2-wire <sup>1)</sup>	<b>5</b>
<b>Operating Instructions</b>	Article No.	<b>Process temperature</b>	
Multi-language	<b>7ML1998-5FT63</b>	Without temperature isolator	<b>A</b>
Note: the Operating Instructions should be ordered as a separate line on the order.		With temperature isolator	<b>B</b>
All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>		Separated enclosure - cable length 1.5 m (4.92 ft) [max. temperature process 150 °C (302 °F)/max. temperature electronics 60 °C (140 °F)]	<b>C</b>
		Separated enclosure - cable length 4.0 m (13.12 ft) [max. temperature process 150 °C (302 °F)/max. temperature electronics 60 °C (140 °F)]	<b>D</b>
<b>Spare Parts</b>		<b>Process connection</b>	
Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT)]	<b>7ML1830-1KL</b>	<b>Threaded</b>	
Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, two relay output (DPDT)]	<b>A5E35525363</b>	R 1½" [(BSPT), EN 10226]	<b>A</b>
Sliding sleeve, 2" BSP (ISO 228)	<b>7ML1830-1JM</b>	1½" NPT [(Taper), ANSI/ASME B1.20.1]	<b>B</b>
Sliding sleeve, 2" NPT (ASME B1.20.1)	<b>7ML1830-1JN</b>	G 2" [(BSPP), EN ISO 228-1], sliding sleeve [min. length 500 mm (19.69 inch)] <sup>2)</sup>	<b>C</b>
Namur Isolator switch amplifier relay output KFD2-SR2-Ex1.W	<b>A5E35667901</b>	2" NPT [(Taper), ANSI/ASME B1.20.1], sliding sleeve [min. length 500 mm (19.69 inch)] <sup>2)</sup>	<b>D</b>
		<b>Flanged</b>	
		DN 100 PN 6, EN 1092-1 <sup>3)</sup>	<b>E</b>
		DN 100 PN 16, EN 1092-1	<b>F</b>
		2" ASME 150 lb B16.5	<b>G</b>
		3" ASME 150 lb B16.5	<b>H</b>
		4" ASME 150 lb B16.5	<b>J</b>
		2" Tri-clamp (DN 50) ISO 2852	<b>K</b>
<b>Available ex stock</b>		<b>Extension length</b>	
For details see page 10/11 in the appendix.		Stainless steel 304 (1.4301)	
SITRANS LVS200, standard, power supply 7, process temperature A, process connection A, extension length 11, material process connection/extension 1, and approval B	<b>7ML5731-7AA11-1BA0</b>	Standard length, 165 mm (6.50 inch)	<b>11</b>
SITRANS LVS200, standard, power supply 7, process temperature A, process connection B, extension length 11, material process connection/extension 1, and approval A	<b>7ML5731-7AB11-1AA0</b>	<b>Add Order code Y01 and plain text: "Insertion length ... mm"</b>	
		200 ... 500 mm (7.87 ... 19.69 inch)	<b>12</b>
		501 ... 750 mm (19.72 ... 29.53 inch)	<b>13</b>
		751 ... 1 000 mm (29.57 ... 39.37 inch)	<b>14</b>
		1 001 ... 1 250 mm (39.41 ... 49.21 inch)	<b>15</b>
		1 251 ... 1 500 mm (49.25 ... 59.06 inch)	<b>16</b>
		1 501 ... 1 750 mm (59.09 ... 68.90 inch)	<b>17</b>
		1 751 ... 2 000 mm (68.94 ... 78.74 inch)	<b>18</b>
		2 001 ... 2 250 mm (78.78 ... 88.58 inch)	<b>21</b>
		2 251 ... 2 500 mm (88.62 ... 98.43 inch)	<b>22</b>
		2 501 ... 2 750 mm (98.46 ... 108.27 inch)	<b>23</b>
		2 751 ... 3 000 mm (108.31 ... 118.11 inch)	<b>24</b>
		3 001 ... 3 250 mm (118.15 ... 127.95 inch)	<b>25</b>
		3 251 ... 3 500 mm (127.99 ... 137.80 inch)	<b>26</b>
		3 501 ... 3 750 mm (137.83 ... 147.64 inch)	<b>27</b>
		3 751 ... 4 000 mm (147.68 ... 157.48 inch)	<b>28</b>

1) Available only with power supply 1 and Approval C, D and with Process connection flange E ... J


2) Available with Approval option D only

3) K05 and G01 are not available together

# Level Measurement

## Point level measurement - Vibrating switches

SITRANS LVS200

Selection and Ordering data	Article No.
<b>SITRANS LVS200, short fork for liquids/solids interface</b> Vibrating point level switch for solids or liquids within liquid interface applications, and high load applications with short insertion requirements	<b>7ML5732-</b>  <b>A 0</b>
<b>Stainless steel 316L (1.4404)</b> Standard length, 165 mm (6.50 inch)	<b>3 1</b>
<b>Add Order code Y01 and plain text:</b> "Insertion length ... mm"	
200 ... 500 mm (7.87 ... 19.69 inch)	<b>3 2</b>
501 ... 750 mm (19.72 ... 29.53 inch)	<b>3 3</b>
751 ... 1 000 mm (29.57 ... 39.37 inch)	<b>3 4</b>
1 001 ... 1 250 mm (39.41 ... 49.21 inch)	<b>3 5</b>
1 251 ... 1 500 mm (49.25 ... 59.06 inch)	<b>3 6</b>
1 501 ... 1 750 mm (59.09 ... 68.90 inch)	<b>3 7</b>
1 751 ... 2 000 mm (68.94 ... 78.74 inch)	<b>3 8</b>
2 001 ... 2 250 mm (78.78 ... 88.58 inch)	<b>4 1</b>
2 251 ... 2 500 mm (88.62 ... 98.43 inch)	<b>4 2</b>
2 501 ... 2 750 mm (98.46 ... 108.27 inch)	<b>4 3</b>
2 751 ... 3 000 mm (108.31 ... 118.11 inch)	<b>4 4</b>
3 001 ... 3 250 mm (118.15 ... 127.95 inch)	<b>4 5</b>
3 251 ... 3 500 mm (127.99 ... 137.80 inch)	<b>4 6</b>
3 501 ... 3 750 mm (137.83 ... 147.64 inch)	<b>4 7</b>
3 751 ... 4 000 mm (147.68 ... 157.48 inch)	<b>4 8</b>
<b>Material process connection/extension</b>	
Stainless steel threads 304 (1.4301), flanges 321(1.4541), Tri-clamp 304 (1.4301) <sup>4</sup>	<b>1</b>
Stainless steel 316L (1.4404) <sup>5</sup>	<b>2</b>
<b>Approvals</b>	
CSA/FM Dust Ignition Proof, RCM	<b>A</b>
ATEX II 1/2 D, RCM	<b>B</b>
CSA/FM General Purpose, RCM, CE	<b>C</b>
CE, RCM	<b>D</b>
IEC-Ex t IIIC Da/Db	<b>E</b>
ATEX II 1G and 1/2G Eex ia IIC; ATEX II 1D and 1/2D, CE, RCM	<b>F</b>
EAC Ex ta/tb IIIC Da/Db, Ex ta IIIC Da	<b>G</b>
EAC Ex Ga/Gb Ex ia IIC, 0Ex ia IIC Ga; Ex ta/tb IIIC Da/Db, Ex ta IIIC Da	<b>H</b>

1) Available with Approval options B, D, E only

2) Not available with extension length options 11,12, 31, 32

3) Max. 6 bar (87psi)

4) Available with option extension length 11 ... 28

5) Available with option extension length 31 ... 48

6) Power supply options 1, 2, 3, 4 not allowed with Approvals options F and H

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 10/11 in the appendix.

Selection and Ordering data	Order code
<b>Further Designs</b>	
Please add "-Z" to Article No. and specify Order code(s).	
Total insertion length: Enter the total insertion length in plain text description, max. 4 000 mm (147.48 inch)	<b>Y01</b>
Stainless steel tag [100 x 45 mm (3.94 x 1.77 inch)]; Measuring-point number/identification (max. 27 characters); specify in plain text	<b>Y14</b>
Signal bulb inserted in M20 cable gland <sup>1)3)</sup>	<b>A20</b>
Adjustable sensitivity (by potentiometer) for solids/liquids interface detection <sup>1)2)4)</sup>	<b>G02</b>
<b>Operating Instructions</b>	Article No.
Multi-language	<b>7ML1998-5FT63</b>
Note: the Operating Instructions should be ordered as a separate line on the order.	
All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Spare Parts</b>	
Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, two relay output (DPDT)]	<b>A5E35525363</b>
Replacement Electronics Module (350 Hz) [19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT)]	<b>7ML1830-1KM</b>
Sliding sleeve, 2" BSP (ISO 228)	<b>7ML1830-1JM</b>
Sliding sleeve, 2" NPT (ASME B1.20.1)	<b>7ML1830-1JN</b>

1) Available with Approval option D only

2) Available with power supply option 1 only

3) A20 not allowed with power supply options 4 or 5

4) G02 not allowed with process temperature options C or D

## Level Measurement

### Point level measurement - Vibrating switches

#### SITRANS LVS200

Selection and Ordering data	Article No.
<b>SITRANS LVS200, pipe extension</b> Vibrating point level switch for high or low levels of bulk solids Extended using 1" pipe extension (customer supplied) ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	<b>7ML5733-</b> 
<b>Power supply</b> 19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT) <sup>1)</sup> 19 ... 230 V AC, 19 ... 55 V DC, two relay outputs (DPDT) <sup>1)</sup> 18 ... 50 V DC PNP <sup>1)</sup> 19 ... 230 V AC/DC without contact, 2-wire loop powered <sup>1)</sup> 7 ... 9 V DC (requires NAMUR switch amplifier) NAMUR IEC 60947-5-6, 2-wire <sup>2)</sup> 8/16 mA or 4 ... 20 mA; 12.5 ... 35 V DC, 2-wire <sup>3)</sup>	1 2 3 4 5 6
<b>Process temperature</b> Up to 150 °C (302 °F)	A
<b>Process connection</b> <u>Threaded</u> R 1½" [(BSPT), EN 10226] 1½" NPT [(Taper), ANSI/ASME B1.20.1] <u>Flanged</u> DN 100 PN 6, EN 1092-14) DN 100 PN 16, EN 1092-1 2" ASME 150 lb B16.5 3" ASME 150 lb B16.5 4" ASME 150 lb B16.5 2" Tri-clamp (DN 50) ISO 2852	A B C D E F G K
<b>Process connection material</b> Stainless steel threads 304 (1.4301), flanges 321 (1.4541), Tri-clamp 304 (1.4301) Stainless steel 316L (1.4404)	1 2
<b>Extension length</b> Customer supplied 1" pipe extension Length: 300 ... 3 800 mm (11.81 ... 149.61 inch)	1
<b>Application type</b> Dry bulk solids (125 Hz) Liquids/solids interface (350 Hz)	1 2
<b>Approvals</b> CSA/FM Dust Ignition Proof, RCM ATEX II 1/2 D, RCM CSA/FM General Purpose, RCM, CE CE, RCM CSA/FM IS Class I, II, III Div. 1, Groups A, B, C, D, E, F, G, FM Class I, Aex ia IIC, CSA Class I, Ex ia IIC, RCM ATEX II 1G and 1/2G Eex ia IIC; ATEX II 1D and 1/2D, RCM IEC-Ex t IIIC Da/Db EAC Ex ta/tb IIIC Da/Db, Ex ta IIIC Da EAC Ex Ga/Gb Ex ia IIC, 0Ex ia IIC Ga; Ex ta/tb IIIC Da/Db, Ex ta IIIC Da	A B C D E F G H J

1) Available with Approval options A, B, C, D, G only

2) Available with approval options D, F, J and application type 1 only

3) Available with Approval options B, D, G only

4) Max. 6 bar (87 psi)

#### Selection and Ordering data

##### Further Designs

Please add "-Z" to Article No. and specify Order code(s).

Total insertion length: Enter the total insertion length in plain text description, max. 3 800 mm (149.61 inch)

Stainless steel tag [100 x 45 mm (3.94 x 1.77 inch)]; Measuring-point number/identification (max. 27 characters); specify in plain text

Enhanced sensitivity > 5 g/l via electronics and increased insertion length of 25 mm (0.98 inch)<sup>5)</sup>

Enhanced sensitivity < 5 g/l via electronics, increased insertion length of 25 mm (0.98 inch) and increased aluminum fork width<sup>1)4)5)</sup>

Adjustable sensitivity (by potentiometer) for solids/liquids interface detection<sup>2)3)4)</sup>

Signal bulb inserted in M20 cable gland<sup>2)6)</sup>

##### Operating Instructions

Multi-language

Note: the Operating Instructions should be ordered as a separate line on the order.

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

##### Spare Parts

Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT)]

Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, two relay output (DPDT)]

Replacement Electronics Module (350 Hz) [19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT)]

NAMUR Isolated switch amplifier Relay output KFD2-SR2-Ex1.W

1) Available only with power supply 1 and Approvals C, D, and with Process connection flange C ... G

2) Available with approval options D only

3) Available with power supply option 1 only and application type 2

4) Not available with option K05


5) Available with Application type 1 only


6) A20 not allowed with power supply options 4, 5, and 6

## Level Measurement

### Point level measurement - Vibrating switches

SITRANS LVS200

Selection and Ordering data	Article No.
<b>SITRANS LVS200, cable extended</b> Vibrating point level switch for high or low level detection of bulk solids materials ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	<b>7ML5734-</b> 
<b>Power supply</b> 19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT) <sup>1)</sup> 19 ... 230 V AC, 19 ... 55 V DC, two relay outputs (DPDT) <sup>1)</sup> 18 ... 50 V DC PNP <sup>1)</sup> 19 ... 230 V AC/DC without contact, 2-wire loop powered <sup>1)</sup> 7 ... 9 V DC (requires NAMUR switch amplifier) NAMUR IEC 60947-5-6, 2-wire <sup>2)5)</sup> 8/16 mA or 4 ... 20 mA; 12.5 ... 35 V DC, 2-wire <sup>3)</sup>	1 2 3 4 5 6
<b>Process temperature</b> Up to 80 °C (176 °F)	A
<b>Process connection</b> <u>Threaded</u> R 1½" [(BSPT), EN 10226] (1.4301/304) 1½" NPT [(Taper), ANSI/ASME B1.20.1] (1.4301/304) <u>Flanged</u> DN 100 PN 6, EN 1092-1 (1.4541/321) <sup>4)</sup> DN 100 PN 16, EN 1092-1 (1.4541/321) 2" ASME 150 lb B16.5 (1.4541/321) 3" ASME 150 lb B16.5 (1.4541/321) 4" ASME 150 lb B16.5 (1.4541/321)	A B  C D E F G
<b>Extension length</b> 750 ... 1 000 mm (29.5 ... 39.4 inch) [max. length 20 000 mm (787.4 inch), not with Power supply option 5 (max. 10 000 mm, 393.7 inch)] <sup>8)</sup> <u>Add Order code Y01 and plain text:</u> <u>"Insertion length ... mm"</u> 1 001 ... 2 000 mm (39.41 ... 78.74 inch) 2 001 ... 3 000 mm (78.78 ... 118.11 inch) 3 001 ... 4 000 mm (118.15 ... 157.48 inch) 4 001 ... 5 000 mm (157.52 ... 196.85 inch) 5 001 ... 6 000 mm (196.89 ... 236.22 inch) 6 001 ... 7 000 mm (236.26 ... 275.59 inch) 7 001 ... 8 000 mm (275.63 ... 314.96 inch) <sup>5)</sup> 8 001 ... 9 000 mm (315 ... 354.33 inch) <sup>5)</sup> 9 001 ... 10 000 mm (354.37 ... 393.70 inch) <sup>5)</sup> 10 001 ... 11 000 mm (393.74 ... 433.07 inch) <sup>5)6)</sup> 11 001 ... 12 000 mm (433.11 ... 472.44 inch) <sup>5)6)</sup> 12 001 ... 13 000 mm (472.48 ... 511.81 inch) <sup>5)6)</sup> 13 001 ... 14 000 mm (511.85 ... 551.18 inch) <sup>5)6)</sup> 14 001 ... 15 000 mm (551.22 ... 590.55 inch) <sup>5)6)</sup> 15 001 ... 16 000 mm (590.59 ... 629.92 inch) <sup>5)6)</sup> 16 001 ... 17 000 mm (629.96 ... 669.29 inch) <sup>5)6)</sup> 17 001 ... 18 000 mm (669.33 ... 708.66 inch) <sup>5)6)</sup> 18 001 ... 19 000 mm (708.70 ... 748.03 inch) <sup>5)6)</sup> 19 001 ... 20 000 mm (748.07 ... 787.40 inch) <sup>5)6)</sup>	10  11 12 13 14 15 16 17 18 20 21 22 23 24 25 26 27 28 30 31
<b>Application type</b> Dry bulk solids (125 Hz) Liquid/solids interface (350 Hz) <sup>7)</sup>	1 2

Selection and Ordering data	Article No.
<b>SITRANS LVS200, cable extended</b> Vibrating point level switch for high or low level detection of bulk solids materials	<b>7ML5734-</b> 
<b>Approvals</b> CSA/FM Dust Ignition Proof, RCM ATEX II 1/2 D, RCM CSA/FM General Purpose, RCM, CE CE, RCM CSA/FM IS Class I, II, III Div. 1, Groups A, B, C, D, E, F, G, FM Class I, Aex ia IIC, CSA Class I, Ex ia IIC, RCM ATEX II 1G and 1/2G Eex ia IIC; ATEX II 1D and 1/2D, RCM <sup>6)</sup> IEC-Ex t IIIC Da/Db EAC Ex ta/tb IIIC Da/Db, Ex ta IIIC Da EAC Ex Ga/Gb Ex ia IIC, 0Ex ia IIC Ga; Ex ta/tb IIIC Da/Db, Ex ta IIIC Da	A B C D E  F  G H J
1) Available with Approval options A, B, C, D, G only 2) Available with Approval options D, E, and F only. Not available for application type 2 "Liquids/solids interface". 3) Available with Approval option D only 4) Max. 6 bar (87 psi) 5) Not available with application type option 2 6) Not available with Power supply option 5 7) Cable length is limited to 7 000 mm (275.59 inch) 8) Available with power supply options 1 ... 4, and 6	

4

## Level Measurement

### Point level measurement - Vibrating switches

#### SITRANS LVS200

Selection and Ordering data	Order code
<b>Further Designs</b>	
Please add <b>"-Z"</b> to Article No. and specify Order code(s).	
Enter the total insertion length in plain text description, max. 20 000 mm (787.40 inch)	<b>Y01</b>
Stainless steel tag [100 x 45 mm (3.94 x 1.77 inch)]; Measuring-point number/identification (max. 27 characters); specify in plain text	<b>Y14</b>
Enhanced sensitivity > 5 g/l via electronics and increased insertion length of 25 mm (0.98 inch) <sup>5)</sup>	<b>K05</b>
Enhanced sensitivity < 5 g/l via electronics and increased insertion length of 25 mm (0.98 inch) and increased aluminum fork width <sup>1)4)</sup>	<b>G01</b>
Adjustable sensitivity (by potentiometer) for solids/liquids interface detection <sup>2)3)4)</sup>	<b>G02</b>
Signal bulb inserted in M20 cable gland <sup>2)6)</sup>	<b>A20</b>
<b>Operating Instructions</b>	
Multi-language	<b>7ML1998-5FT63</b>
Note: the Operating Instructions should be ordered as a separate line on the order. All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>	
<b>Spare Parts</b>	
Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT)]	<b>7ML1830-1KL</b>
Replacement Electronics Module (125 Hz) [19 ... 230 V AC, 19 ... 55 V DC, two relay output (DPDT)]	<b>A5E35525363</b>
Replacement Electronics Module (350 Hz) [19 ... 230 V AC, 19 ... 55 V DC, one relay output (SPDT)]	<b>7ML1830-1KM</b>
NAMUR Isolated switch amplifier Relay output KFD2-SR2-Ex1.W	<b>A5E35667901</b>

1) Available only with power supply 1 and Approvals C, D, and with process connection flange C ... G

2) Available with Approval options D only

3) Available with power supply option 1 and application type 2 only


4) Not available with option K05

5) Available with Application type 1 only

6) A20 not allowed with power supply 4, 5, or 6



### Dimensional drawings

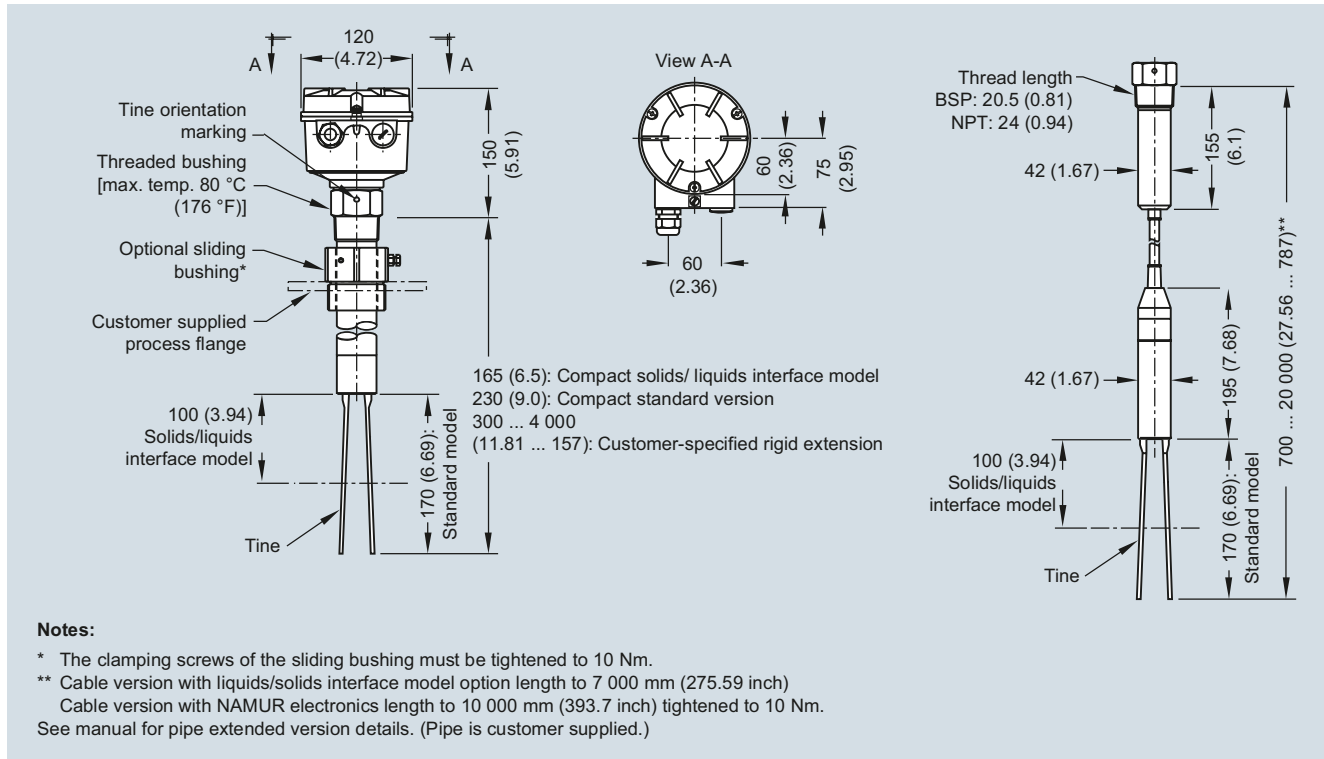

SITRANS LVS200, dimensions in mm (inch)