

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 - Standard

#### Overview



Pointek CLS200 (standard version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe.

#### Benefits

- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- 3 LED indicators for sensor status, output status, and power
- Suitable for API 2350

#### Application


Pointek CLS200 standard version has 3 LED indicators with basic relay and solid-state switch alarms. Universal switch for solids/liquids and interface.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 250 V AC/DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).

- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

#### Configuration


##### Installation

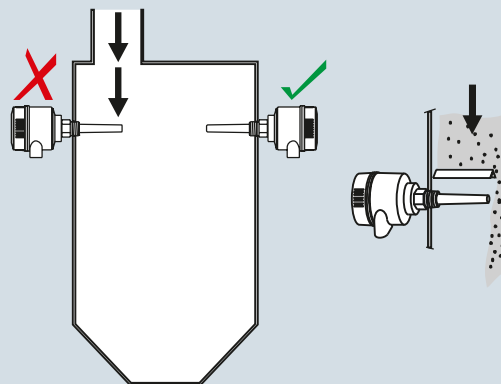

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

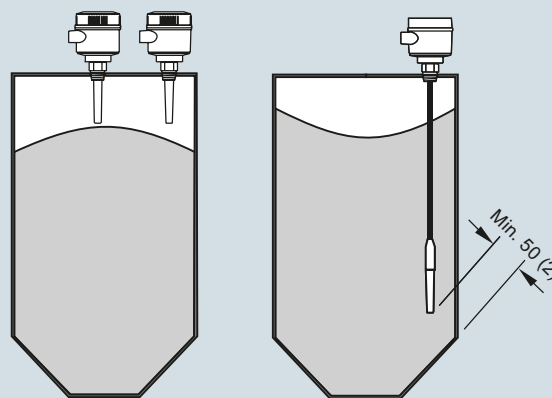

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

# Level Measurement

## Point level measurement - RF Capacitance switches

Pointek CLS200 - Standard

### Technical specifications

|                                                                                                                  |                                                    |
|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <b>Mode of operation</b>                                                                                         |                                                    |
| Measuring principle                                                                                              | Inverse frequency shift capacitive level detection |
| <b>Input</b>                                                                                                     |                                                    |
| Measured variable                                                                                                | Change in picoFarad (pF)                           |
| <b>Output</b>                                                                                                    |                                                    |
| Output signal                                                                                                    |                                                    |
| • Relay output                                                                                                   | 1 SPDT Form C relay                                |
| - Max. contact voltage                                                                                           | • 30 V DC<br>• 250 V AC                            |
| - Max. contact current                                                                                           | • 5 A DC<br>• 8 A AC                               |
| - Max. switching capacity                                                                                        | • 150 W DC<br>• 2 000 VA AC                        |
| - Time delay (ON and/or OFF)                                                                                     | 1 ... 60 s                                         |
| • Solid-state output                                                                                             |                                                    |
| - Output                                                                                                         | Galvanically isolated                              |
| - Protection                                                                                                     | Against reversed polarity (bipolar)                |
| - Max. switching voltage                                                                                         | • 30 V DC<br>• 30 V peak AC                        |
| - Max. load current                                                                                              | 82 mA                                              |
| - Voltage drop                                                                                                   | < 1 V, typical at 50 mA                            |
| - Time delay (pre or post switching)                                                                             | 1 ... 60 s                                         |
| <b>Rated operating conditions<sup>1)</sup></b>                                                                   |                                                    |
| Installation conditions                                                                                          |                                                    |
| • Location                                                                                                       | Indoor/outdoor                                     |
| Ambient conditions                                                                                               |                                                    |
| • Ambient temperature                                                                                            | -40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>     |
| • Installation category                                                                                          | II                                                 |
| • Pollution degree                                                                                               | 4                                                  |
| Medium conditions                                                                                                | Liquids, bulk solids, slurries and interfaces      |
| • Relative dielectric constant $\epsilon_r$                                                                      | Min. 1.5                                           |
| • Process temperature                                                                                            |                                                    |
| - Without thermal isolator                                                                                       | -40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>     |
| - With thermal isolator                                                                                          | -40 ... +125 °C (-40 ... +257 °F)                  |
| • Process pressure (rod version)                                                                                 | -1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)  |
| • Process pressure (cable version) <sup>3)</sup>                                                                 | -1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)  |
| • Process pressure (sliding coupling version)                                                                    | -1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)  |
| <b>Electromagnetic compatibility</b>                                                                             |                                                    |
| To comply with CE EMC regulations (where applicable); the CLS200 should be installed per the instruction manual. |                                                    |

|                                             |                                                                                                             |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Design</b>                               |                                                                                                             |
| Material                                    | Epoxy-coated aluminum with gasket                                                                           |
| • Enclosure                                 | 316L stainless steel                                                                                        |
| • Optional thermal isolator                 |                                                                                                             |
| Connection                                  | Removable terminal block, max. 2.5 mm <sup>2</sup>                                                          |
| Degree of protection                        | IP65/Type 4/NEMA 4 (optional IP68)                                                                          |
| Cable inlet                                 | 2 x M20 x 1.5 thread<br>(option: 2 x 1/2" NPT conduit entry including 1 plugged entry)                      |
| <b>Power supply</b>                         |                                                                                                             |
| 12 ... 250 V AC/DC,<br>0 ... 60 Hz max. 2 W |                                                                                                             |
| <b>Certificates and approvals</b>           |                                                                                                             |
| General Purpose                             | CSA, FM, CE, RCM                                                                                            |
| Dust Ignition Proof                         | ATEX II 1/2 D T100 °C                                                                                       |
| Flameproof Enclosure With IS Probe          | ATEX II 1 G EEx d[ia] IIC T6 ... T4<br>ATEX II 1/2 D T100 °C                                                |
| Dust Ignition Proof with IS Probe           | CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                              |
| Explosion Proof Enclosure With IS Probe     | CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4 |
| Marine                                      | Lloyds Register of Shipping,<br>Categories ENV1, ENV2, and ENV5                                             |
| Overfill Protection                         | WHG (Germany)<br>VLAREM II                                                                                  |
| Others                                      | Pattern Approval (China), SIL                                                                               |

- 1) When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 4/35.
- 2) Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)
- 3) Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 4/35.

## Level Measurement

### Point level measurement - RF Capacitance switches

#### Pointek CLS200 - Standard

##### Design: Probe

|                                | Rod version                                                                                                                                                                                                                                 | Sanitary version                                       | Cable version                                                                                                                                                                                                                            | Sliding Coupling version                                                                                                                                                                          |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. length                    | 5 500 mm (216.53 inch)                                                                                                                                                                                                                      | 5 500 mm (216.53 inch)                                 | <ul style="list-style-type: none"> <li>• 30 000 mm (1 181.1 inch) liquids and slurries</li> <li>• 5 000 mm (196.85 inch) solids (under loads)</li> </ul>                                                                                 | 5 500 mm (216.53 inch)                                                                                                                                                                            |
| Process connection             | R ¾", 1", 1¼", 1½"<br>[(BSPT), EN 10226/PT (JIS-T), JIS B 0203]<br><br>¾", 1", 1¼", 1½" NPT<br>[(Taper), ANSI/ASME B1.20.1]<br><br>G ¾", 1", 1½"<br>[(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]<br>316L stainless steel<br>ASME/EN flange | 1½", 2" sanitary fitting clamp<br>316L stainless steel | R ¾", 1", 1¼", 1½"<br>[(BSPT), EN 10226/PT (JIS-T), JIS B 0203]<br><br>¾", 1", 1¼", 1½" NPT<br>[(Taper), ANSI/ASME B1.20.1]<br><br>G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]<br>316L stainless steel<br>ASME/EN flange | R ¾", 1", 1¼", 1½"<br>[(BSPT), EN 10226/PT (JIS-T), JIS B 0203]<br><br>¾", 1", 1¼", 1½" NPT<br>[(Taper), ANSI/ASME B1.20.1]<br><br>G ¾", 1", 1½"<br>[(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] |
| Extension material             | 316L stainless steel<br>optional PFA coated <sup>1)</sup>                                                                                                                                                                                   | 316L stainless steel                                   | Fluoroethylene propylene (FEP) cable with stainless steel core                                                                                                                                                                           | 316L stainless steel                                                                                                                                                                              |
| Sensor wetted parts            | PPS (optional PVDF)                                                                                                                                                                                                                         | PPS (optional PVDF)                                    | PPS (optional PVDF)                                                                                                                                                                                                                      | PPS (optional PVDF)                                                                                                                                                                               |
| O-ring seal material           | FKM (optional FFKM) <sup>2)</sup>                                                                                                                                                                                                           | FKM (optional FFKM) <sup>2)</sup>                      | FKM (optional FFKM) <sup>2)</sup>                                                                                                                                                                                                        | FKM (optional FFKM) <sup>2)</sup>                                                                                                                                                                 |
| Thermal isolator <sup>3)</sup> | Optional                                                                                                                                                                                                                                    | Optional                                               | Optional                                                                                                                                                                                                                                 | Optional                                                                                                                                                                                          |
| Extension                      | User selected length                                                                                                                                                                                                                        | User selected length                                   | Cable extension                                                                                                                                                                                                                          | User selected length                                                                                                                                                                              |

<sup>1)</sup> PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

<sup>2)</sup> For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit [http://www.automation.siemens.com/aspa\\_app](http://www.automation.siemens.com/aspa_app).

<sup>3)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

## Level Measurement

## Point level measurement - RF Capacitance switches

## Pointek CLS200 - Standard

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Standard - Rod Version with Threaded or Flanged process connection</b>                                                                                                                                                                                         | <b>7ML5630-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. | <b>0</b>        |
| ➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                              |                 |
| <b>Process connection</b>                                                                                                                                                                                                                                                          |                 |
| Threaded, 316L stainless steel                                                                                                                                                                                                                                                     |                 |
| ¾" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                | 0 A             |
| 1" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                | 0 B             |
| 1¼" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                               | 0 C             |
| 1½" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                               | 0 D             |
| R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                     | 1 A             |
| R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                     | 1 B             |
| R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                    | 1 D             |
| R ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                 | 3 A             |
| G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                 | 3 B             |
| G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                | 3 D             |
| Welded flange, 316L stainless steel, raised face                                                                                                                                                                                                                                   |                 |
| 1" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 A             |
| 1" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 B             |
| 1" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 C             |
| 1½" ASME, 150 lb                                                                                                                                                                                                                                                                   | 5 D             |
| 1½" ASME, 300 lb                                                                                                                                                                                                                                                                   | 5 E             |
| 1½" ASME, 600 lb                                                                                                                                                                                                                                                                   | 5 F             |
| 2" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 G             |
| 2" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 H             |
| 2" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 J             |
| 3" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 K             |
| 3" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 L             |
| 3" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 M             |
| 4" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 N             |
| 4" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 P             |
| 4" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 Q             |
| Welded flange, 316L stainless steel, Type A flat faced                                                                                                                                                                                                                             |                 |
| DN 25, PN 16                                                                                                                                                                                                                                                                       | 6 A             |
| DN 25, PN 40                                                                                                                                                                                                                                                                       | 6 B             |
| DN 40, PN 16                                                                                                                                                                                                                                                                       | 6 C             |
| DN 40, PN 40                                                                                                                                                                                                                                                                       | 6 D             |
| DN 50, PN 16                                                                                                                                                                                                                                                                       | 6 E             |
| DN 50, PN 40                                                                                                                                                                                                                                                                       | 6 F             |
| DN 80, PN 16                                                                                                                                                                                                                                                                       | 6 G             |
| DN 80, PN 40                                                                                                                                                                                                                                                                       | 6 H             |
| DN 100, PN 16                                                                                                                                                                                                                                                                      | 6 J             |
| DN 100, PN 40                                                                                                                                                                                                                                                                      | 6 K             |
| (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)                                                                                                                                                           |                 |
| <b>Probe length</b><br>(length from flange face)<br>(threaded lengths include process thread)                                                                                                                                                                                      |                 |
| Note: No Y01 needed in Order code for standard lengths                                                                                                                                                                                                                             |                 |
| Compact [threaded 120 mm (4.72 inch), Flanged 98 mm (3.86 inch)]                                                                                                                                                                                                                   | A               |
| Extended rod, 250 mm (9.84 inch)                                                                                                                                                                                                                                                   | B               |
| Extended rod, 350 mm (13.78 inch)                                                                                                                                                                                                                                                  | C               |
| Extended rod, 500 mm (19.69 inch)                                                                                                                                                                                                                                                  | D               |
| Extended rod, 750 mm (29.53 inch)                                                                                                                                                                                                                                                  | E               |
| Extended rod, 1 000 mm (39.37 inch)                                                                                                                                                                                                                                                | F               |
| Extended rod, 1 250 mm (49.21 inch)                                                                                                                                                                                                                                                | G               |
| Extended rod, 1 350 mm (53.15 inch)                                                                                                                                                                                                                                                | H               |
| Extended rod, 1 500 mm (59.06 inch)                                                                                                                                                                                                                                                | J               |
| Extended rod, 1 750 mm (68.90 inch)                                                                                                                                                                                                                                                | K               |
| Extended rod, 2 000 mm (78.74 inch)                                                                                                                                                                                                                                                | L               |

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Standard - Rod Version with Threaded or Flanged process connection</b>                                                                                                                                                                                         | <b>7ML5630-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. | <b>0</b>        |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                       |                 |
| Extended rod, 210 ... 1 000 mm (8.27 ... 39.37 inch)                                                                                                                                                                                                                               | M               |
| Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)                                                                                                                                                                                                                            | N               |
| Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)                                                                                                                                                                                                                           | P               |
| Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)                                                                                                                                                                                                                          | Q               |
| Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)                                                                                                                                                                                                                          | R               |
| Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)                                                                                                                                                                                                                          | S               |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                            |                 |
| Without thermal isolator                                                                                                                                                                                                                                                           | 0               |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                    | 1               |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                               |                 |
| With 2 m (79 inch) of cable <sup>1)2)</sup>                                                                                                                                                                                                                                        | 2               |
| With 5 m (197 inch) of cable <sup>1)2)</sup>                                                                                                                                                                                                                                       | 3               |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                |                 |
| FKM                                                                                                                                                                                                                                                                                | 0               |
| FFKM [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                               | 1               |
| <b>Probe material</b>                                                                                                                                                                                                                                                              |                 |
| 316L stainless steel with PPS probe body                                                                                                                                                                                                                                           | 0               |
| 316L stainless steel with PVDF probe body                                                                                                                                                                                                                                          | 1               |
| <b>Approvals</b>                                                                                                                                                                                                                                                                   |                 |
| Dust Ignition Proof:<br>CE, RCM, ATEX II 1/2 D T100 °C                                                                                                                                                                                                                             | C               |
| Flameproof Enclosure with IS Probe:<br>CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                                         | D               |
| Flameproof Enclosure with IS Probe, with WHG approval:<br>CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                    | E               |
| Dust Ignition Proof with IS Probe:<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                                                               | F               |
| Explosion Proof Enclosure with IS Probe:<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                            | G               |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                          | H               |
| General Purpose (CE, RCM)                                                                                                                                                                                                                                                          | J               |
| General Purpose (CSA, FM, CE, RCM) with WHG approval                                                                                                                                                                                                                               | K               |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                           |                 |
| Aluminum epoxy coated                                                                                                                                                                                                                                                              |                 |
| 2 x ½" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                         | A               |
| 2 x M20 x 1.5 cable inlet IP65                                                                                                                                                                                                                                                     | B               |
| 2 x ½" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                         | C               |
| 2 x M20 x 1.5 cable inlet IP68                                                                                                                                                                                                                                                     | D               |

1) Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection

2) Available with approval options F, G, and H

➤ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ➤. For details see page 10/11 in the appendix.

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 - Standard

| Selection and Ordering data                                                                                                                                                                                         | Order code    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Further designs</b>                                                                                                                                                                                              |               |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |               |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | Y01           |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:                                                                                                                                                                | Y15           |
| Measuring-point number/identification (max. 27 characters) specify in plain text                                                                                                                                    |               |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | C11           |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | C12           |
| SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]                                                                                                                                                         | C20           |
| <b>Operating Instructions</b>                                                                                                                                                                                       |               |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |               |
| <b>Accessories</b>                                                                                                                                                                                                  | See page 4/34 |

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 10/11 in the appendix.

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| <b>Pointek CLS200 - Standard - Cable Version with Threaded or Flanged process connection</b>                                                                                                                                                                                       | 7ML5631-0   |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |             |
| Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                |             |
| <b>Process connection</b>                                                                                                                                                                                                                                                          |             |
| Threaded, 316L stainless steel                                                                                                                                                                                                                                                     |             |
| 3/4" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                              | 0 A         |
| 1" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                | 0 B         |
| 1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                            | 0 C         |
| 1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                            | 0 D         |
| R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                   | 1 A         |
| R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                     | 1 B         |
| R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                 | 1 D         |
| G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                               | 3 A         |
| G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                 | 3 B         |
| G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                             | 3 D         |
| <b>Welded flange, 316L stainless steel, raised face</b>                                                                                                                                                                                                                            |             |
| 1" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 A         |
| 1" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 B         |
| 1" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 C         |
| 1 1/2" ASME, 150 lb                                                                                                                                                                                                                                                                | 5 D         |
| 1 1/2" ASME, 300 lb                                                                                                                                                                                                                                                                | 5 E         |
| 1 1/2" ASME, 600 lb                                                                                                                                                                                                                                                                | 5 F         |
| 2" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 G         |
| 2" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 H         |
| 2" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 J         |
| 3" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 K         |
| 3" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 L         |
| 3" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 M         |
| 4" ASME, 150 lb                                                                                                                                                                                                                                                                    | 5 N         |
| 4" ASME, 300 lb                                                                                                                                                                                                                                                                    | 5 P         |
| 4" ASME, 600 lb                                                                                                                                                                                                                                                                    | 5 Q         |
| <b>Welded flange, 316L stainless steel, Type A flat faced</b>                                                                                                                                                                                                                      |             |
| DN 25, PN 16                                                                                                                                                                                                                                                                       | 6 A         |
| DN 25, PN 40                                                                                                                                                                                                                                                                       | 6 B         |
| DN 40, PN 16                                                                                                                                                                                                                                                                       | 6 C         |
| DN 40, PN 40                                                                                                                                                                                                                                                                       | 6 D         |
| DN 50, PN 16                                                                                                                                                                                                                                                                       | 6 E         |
| DN 50, PN 40                                                                                                                                                                                                                                                                       | 6 F         |
| DN 80, PN 16                                                                                                                                                                                                                                                                       | 6 G         |
| DN 80, PN 40                                                                                                                                                                                                                                                                       | 6 H         |
| DN 100, PN 16                                                                                                                                                                                                                                                                      | 6 J         |
| DN 100, PN 40                                                                                                                                                                                                                                                                      | 6 K         |
| (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)                                                                                                                                                           |             |
| <b>Probe length</b>                                                                                                                                                                                                                                                                |             |
| (length from flange face)                                                                                                                                                                                                                                                          |             |
| (threaded lengths include process thread)                                                                                                                                                                                                                                          |             |
| Note: No Y01 needed in Order code for standard lengths                                                                                                                                                                                                                             |             |
| Extended cable, 3 000 mm (118.11 inch), length can be determined by customer on assembly <sup>1)</sup>                                                                                                                                                                             | A           |
| Extended cable, 6 000 mm (236.22 inch), length can be determined by customer on assembly <sup>1)</sup>                                                                                                                                                                             | B           |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                       |             |
| Extended cable, 500 ... 5 000 mm (19.69 ... 196.85 inch)                                                                                                                                                                                                                           | C           |
| Extended cable, 5 001 ... 10 000 mm (196.89 ... 393.70 inch)                                                                                                                                                                                                                       | D           |
| Extended cable, 10 001 ... 15 000 mm (393.74 ... 590.55 inch)                                                                                                                                                                                                                      | E           |
| Extended cable, 15 001 ... 20 000 mm (590.59 ... 787.4 inch)                                                                                                                                                                                                                       | F           |
| Extended cable, 20 001 ... 25 000 mm (787.44 ... 984.25 inch)                                                                                                                                                                                                                      | G           |
| Extended cable, 25 001 ... 30 000 mm (984.29 ... 1 181.1 inch)                                                                                                                                                                                                                     | H           |

## Level Measurement

## Point level measurement - RF Capacitance switches

## Pointek CLS200 - Standard

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <b>Pointek CLS200 - Standard - Cable Version with Threaded or Flanged process connection</b>                                                                                                                                                                                       | <b>7ML5631-</b>                                                                              |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |  <b>0</b>   |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                            |                                                                                              |
| Without thermal isolator                                                                                                                                                                                                                                                           |  <b>0</b>   |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                    |  <b>1</b>   |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                               |                                                                                              |
| With 2 m (79 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                          |  <b>2</b>   |
| With 5 m (197 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                         |  <b>3</b>   |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                |                                                                                              |
| FKM and PTFE                                                                                                                                                                                                                                                                       |  <b>0</b>   |
| FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                      |  <b>1</b>   |
| <b>Probe material</b>                                                                                                                                                                                                                                                              |                                                                                              |
| FEP jacketed cable with PPS probe body                                                                                                                                                                                                                                             |  <b>0</b>   |
| FEP jacketed cable with PVDF probe body                                                                                                                                                                                                                                            |  <b>1</b>   |
| <b>Approvals</b>                                                                                                                                                                                                                                                                   |                                                                                              |
| Dust Ignition Proof:<br>CE, RCM, ATEX II 1/2 D T100 °C                                                                                                                                                                                                                             |  <b>C</b>   |
| Flameproof Enclosure with IS Probe:<br>CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4,<br>ATEX II 1/2 D T100 °C                                                                                                                                                                      |  <b>D</b>   |
| Flameproof Enclosure with IS Probe,<br>with WHG approval:<br>CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4,<br>ATEX II 1/2 D T100 °C                                                                                                                                              |  <b>E</b>  |
| Dust Ignition Proof with IS Probe:<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                                                               |  <b>F</b> |
| Explosion Proof Enclosure with IS Probe:<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                            |  <b>G</b> |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                          |  <b>H</b> |
| General Purpose (CE, RCM)                                                                                                                                                                                                                                                          |  <b>J</b> |
| General Purpose (CSA, FM, CE, RCM)<br>with WHG approval                                                                                                                                                                                                                            |  <b>K</b> |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                           |                                                                                              |
| Aluminum epoxy coated                                                                                                                                                                                                                                                              |                                                                                              |
| 2 x 1/2" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                       |  <b>A</b> |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                    |  <b>B</b> |
| 2 x 1/2" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                       |  <b>C</b> |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                    |  <b>D</b> |

<sup>1)</sup> Sensor detached to allow customer to set desired cable length

<sup>2)</sup> Available with Approvals options F ... H

 We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.

| Selection and Ordering data                                                                                                                                                                                         | Order code                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <b>Further designs</b>                                                                                                                                                                                              |                                                                                                |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |                                                                                                |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  |  <b>Y01</b> |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:<br>Measuring-point number/identification<br>(max. 27 characters) specify in plain text                                                                         |  <b>Y15</b> |
| Manufacturer's test certificate: M to DIN 55350,<br>Part 18 and ISO 9000                                                                                                                                            |  <b>C11</b> |
| Material inspection Certificate Type 3.1 per<br>EN 10204                                                                                                                                                            |  <b>C12</b> |
| SIL/IEC 61508 Declaration of Conformity<br>[SIL 2 (overspill)]                                                                                                                                                      | <b>C20</b>                                                                                     |
| <b>Operating Instructions</b>                                                                                                                                                                                       |                                                                                                |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |                                                                                                |
| <b>Accessories</b>                                                                                                                                                                                                  | <b>See page 4/34</b>                                                                           |

 We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.

## Level Measurement

### Point level measurement - RF Capacitance switches

#### Pointek CLS200 - Standard

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Standard - Rod with Sanitary process connection</b>                                                                                                                                                                                                            | <b>7ML5632-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |                 |
| Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                |                 |
| <b>Process connection</b>                                                                                                                                                                                                                                                          |                 |
| <u>Sanitary 316L stainless steel</u>                                                                                                                                                                                                                                               |                 |
| 1" sanitary fitting clamp                                                                                                                                                                                                                                                          | 8 A             |
| 1½" sanitary fitting clamp                                                                                                                                                                                                                                                         | 8 B             |
| 2" sanitary fitting clamp                                                                                                                                                                                                                                                          | 8 C             |
| 2½" sanitary fitting clamp                                                                                                                                                                                                                                                         | 8 D             |
| 3" sanitary fitting clamp                                                                                                                                                                                                                                                          | 8 E             |
| (Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard)                                                                                                                                                                                          |                 |
| <b>Probe length</b>                                                                                                                                                                                                                                                                |                 |
| (length from process connection face)                                                                                                                                                                                                                                              |                 |
| Note: No Y01 needed in Order code for standard lengths                                                                                                                                                                                                                             |                 |
| Compact, 98 mm (3.86 inch)                                                                                                                                                                                                                                                         | A               |
| Extended rod, 250 mm (9.84 inch)                                                                                                                                                                                                                                                   | B               |
| Extended rod, 350 mm (13.78 inch)                                                                                                                                                                                                                                                  | C               |
| Extended rod, 500 mm (19.69 inch)                                                                                                                                                                                                                                                  | D               |
| Extended rod, 750 mm (29.53 inch)                                                                                                                                                                                                                                                  | E               |
| Extended rod, 1 000 mm (39.37 inch)                                                                                                                                                                                                                                                | F               |
| Extended rod, 1 250 mm (49.21 inch)                                                                                                                                                                                                                                                | G               |
| Extended rod, 1 350 mm (53.15 inch)                                                                                                                                                                                                                                                | H               |
| Extended rod, 1 500 mm (59.06 inch)                                                                                                                                                                                                                                                | J               |
| Extended rod, 1 750 mm (68.90 inch)                                                                                                                                                                                                                                                | K               |
| Extended rod, 2 000 mm (78.74 inch)                                                                                                                                                                                                                                                | L               |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                       |                 |
| Extended rod, 110 ... 350 mm (4.3 ... 13.78 inch)                                                                                                                                                                                                                                  | M               |
| Extended rod, 351 ... 1 000 mm (13.78 ... 39.37 inch)                                                                                                                                                                                                                              | N               |
| Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)                                                                                                                                                                                                                            | P               |
| Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)                                                                                                                                                                                                                           | Q               |
| Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)                                                                                                                                                                                                                          | R               |
| Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)                                                                                                                                                                                                                          | S               |
| Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)                                                                                                                                                                                                                          | T               |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                            |                 |
| Without thermal isolator                                                                                                                                                                                                                                                           | 0               |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                    | 1               |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                               |                 |
| Remote mount electronics with 2 m (79 inch) of cable                                                                                                                                                                                                                               | 2               |
| Remote mount electronics with 5 m (197 inch) of cable                                                                                                                                                                                                                              | 3               |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                |                 |
| FKM                                                                                                                                                                                                                                                                                | 0               |
| FFKM                                                                                                                                                                                                                                                                               | 1               |
| [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                                    |                 |
| <b>Probe material</b>                                                                                                                                                                                                                                                              |                 |
| 316L stainless steel with PPS probe body                                                                                                                                                                                                                                           | 0               |
| 316L stainless steel with PVDF probe body                                                                                                                                                                                                                                          | 1               |

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Standard - Rod with Sanitary process connection</b>                                                                                                                                                                                                            | <b>7ML5632-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |                 |
| Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                |                 |
| <b>Approvals</b>                                                                                                                                                                                                                                                                   |                 |
| Dust Ignition Proof:<br>CE, RCM, ATEX II 1/2 D T100 °C                                                                                                                                                                                                                             | C               |
| Flameproof Enclosure with IS Probe:<br>CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                                         | D               |
| Flameproof Enclosure with IS Probe, with WHG approval:<br>CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                    | E               |
| Dust Ignition Proof with IS Probe:<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                                                               | F               |
| Explosion Proof Enclosure with IS Probe:<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                            | G               |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                          | H               |
| General Purpose (CE, RCM)                                                                                                                                                                                                                                                          | J               |
| General Purpose (CSA, FM, CE, RCM) with WHG approval                                                                                                                                                                                                                               | K               |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                           |                 |
| <u>Aluminum epoxy coated</u>                                                                                                                                                                                                                                                       |                 |
| 2 x ½" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                         | A               |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                    | B               |
| 2 x ½" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                         | C               |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                    | D               |

| Selection and Ordering data                                                                                                                                                                                         | Order code    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Further designs</b>                                                                                                                                                                                              |               |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |               |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | Y01           |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:                                                                                                                                                                | Y15           |
| Measuring-point number/identification (max. 27 characters) specify in plain text                                                                                                                                    |               |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | C11           |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | C12           |
| SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]                                                                                                                                                         | C20           |
| <b>Operating Instructions</b>                                                                                                                                                                                       |               |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |               |
| <b>Accessories</b>                                                                                                                                                                                                  | See page 4/34 |

We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.

## Level Measurement

## Point level measurement - RF Capacitance switches

## Pointek CLS200 - Standard

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Standard - Sliding Coupling with Threaded process connection</b>                                                                                                                                                                                               | <b>7ML5633-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |                 |
| Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                |                 |
| <b>Process connection</b>                                                                                                                                                                                                                                                          |                 |
| Threaded, 316L stainless steel                                                                                                                                                                                                                                                     |                 |
| ¾" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                | 0 A             |
| 1" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                | 0 B             |
| 1¼" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                               | 0 C             |
| 1½" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                               | 0 D             |
| R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                     | 1 A             |
| R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                     | 1 B             |
| R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                    | 1 D             |
| G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                 | 3 A             |
| G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                 | 3 B             |
| G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                | 3 D             |
| <b>Probe length</b>                                                                                                                                                                                                                                                                |                 |
| (length from flange face)                                                                                                                                                                                                                                                          |                 |
| (threaded lengths include process thread)                                                                                                                                                                                                                                          |                 |
| Note: No Y01 needed in Order code for standard lengths                                                                                                                                                                                                                             |                 |
| Extended rod, 350 mm (13.78 inch)                                                                                                                                                                                                                                                  | C               |
| Extended rod, 500 mm (19.69 inch)                                                                                                                                                                                                                                                  | D               |
| Extended rod, 750 mm (29.53 inch)                                                                                                                                                                                                                                                  | E               |
| Extended rod, 1 000 mm (39.37 inch)                                                                                                                                                                                                                                                | F               |
| Extended rod, 1 250 mm (49.21 inch)                                                                                                                                                                                                                                                | G               |
| Extended rod, 1 350 mm (53.15 inch)                                                                                                                                                                                                                                                | H               |
| Extended rod, 1 500 mm (59.06 inch)                                                                                                                                                                                                                                                | J               |
| Extended rod, 1 750 mm (68.90 inch)                                                                                                                                                                                                                                                | K               |
| Extended rod, 2 000 mm (78.74 inch)                                                                                                                                                                                                                                                | L               |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                       |                 |
| Extended rod, 350 ... 1 000 mm (13.78 ... 39.37 inch)                                                                                                                                                                                                                              | M               |
| Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)                                                                                                                                                                                                                            | N               |
| Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)                                                                                                                                                                                                                           | P               |
| Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)                                                                                                                                                                                                                          | Q               |
| Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)                                                                                                                                                                                                                          | R               |
| Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)                                                                                                                                                                                                                          | S               |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                            |                 |
| Without thermal isolator                                                                                                                                                                                                                                                           | 0               |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                    | 1               |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                               |                 |
| With 2 m (79 inch) of cable <sup>1)</sup>                                                                                                                                                                                                                                          | 2               |
| With 5 m (197 inch) of cable <sup>1)</sup>                                                                                                                                                                                                                                         | 3               |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                |                 |
| FKM and PTFE                                                                                                                                                                                                                                                                       | 0               |
| FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                      | 1               |
| <b>Probe material</b>                                                                                                                                                                                                                                                              |                 |
| 316L stainless steel with PPS probe body                                                                                                                                                                                                                                           | 0               |
| 316L stainless steel with PVDF probe body                                                                                                                                                                                                                                          | 1               |

| Selection and Ordering data                                                                                                                                                                                                                                                        | Article No.     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Standard - Sliding Coupling with Threaded process connection</b>                                                                                                                                                                                               | <b>7ML5633-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |                 |
| <b>Approvals</b>                                                                                                                                                                                                                                                                   |                 |
| Dust Ignition Proof:<br>CE, RCM, ATEX II 1/2 D T100 °C                                                                                                                                                                                                                             | C               |
| Flameproof Enclosure with IS Probe:<br>CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                                         | D               |
| Flameproof Enclosure with IS Probe, with WHG approval:<br>CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                    | E               |
| Dust Ignition Proof with IS Probe:<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                                                               | F               |
| Explosion Proof Enclosure with IS Probe:<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                            | G               |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                          | H               |
| General Purpose (CE, RCM)                                                                                                                                                                                                                                                          | J               |
| General Purpose (CSA, FM, CE, RCM) with WHG approval                                                                                                                                                                                                                               | K               |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                           |                 |
| Aluminum epoxy coated                                                                                                                                                                                                                                                              |                 |
| 2 x ½" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                         | A               |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                    | B               |
| 2 x ½" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                         | C               |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                    | D               |
| 1) Available with Approvals options F ... H                                                                                                                                                                                                                                        |                 |

We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.

| Selection and Ordering data                                                                                                                                                                                         | Order code    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Further designs</b>                                                                                                                                                                                              |               |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |               |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | Y01           |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:                                                                                                                                                                | Y15           |
| Measuring-point number/identification (max. 27 characters) specify in plain text                                                                                                                                    |               |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | C11           |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | C12           |
| SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]                                                                                                                                                         | C20           |
| <b>Operating Instructions</b>                                                                                                                                                                                       |               |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |               |
| <b>Accessories</b>                                                                                                                                                                                                  | See page 4/34 |

We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 10/11 in the appendix.

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 - Standard

| Selection and Ordering data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Article No.                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pointek CLS200 - Standard - PFA Coated Rod with PFA Coated Flanged process connection</b><br>Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.<br>➔ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>7ML5634-</b><br>                                                                                                                                                                                            |
| <b>Process connection</b><br>Welded flange, 316L stainless steel, raised face<br>1" ASME, 150 lb<br>1" ASME, 300 lb<br>1" ASME, 600 lb<br>1½" ASME, 150 lb<br>1½" ASME, 300 lb<br>1½" ASME, 600 lb<br>2" ASME, 150 lb<br>2" ASME, 300 lb<br>2" ASME, 600 lb<br>3" ASME, 150 lb<br>3" ASME, 300 lb<br>3" ASME, 600 lb<br>4" ASME, 150 lb<br>4" ASME, 300 lb<br>4" ASME, 600 lb<br>Welded flange, 316L stainless steel, type A flat faced<br>DN 25, PN 16<br>DN 25, PN 40<br>DN 40, PN 16<br>DN 40, PN 40<br>DN 50, PN 16<br>DN 50, PN 40<br>DN 80, PN 16<br>DN 80, PN 40<br>DN 100, PN 16<br>DN 100, PN 40<br>(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)                                                                                                                                                                                                                                                                                       | <b>5 A</b><br><b>5 B</b><br><b>5 C</b><br><b>5 D</b><br><b>5 E</b><br><b>5 F</b><br><b>5 G</b><br><b>5 H</b><br><b>5 J</b><br><b>5 K</b><br><b>5 L</b><br><b>5 M</b><br><b>5 N</b><br><b>5 P</b><br><b>5 Q</b> |
| <b>Probe length</b><br>(length from flange face)<br>(threaded lengths include process thread)<br>Note: No Y01 needed in Order code for standard lengths<br>Compact, 98 mm (3.86 inch)<br>Extended rod, 250 mm (9.84 inch)<br>Extended rod, 350 mm (13.78 inch)<br>Extended rod, 500 mm (19.69 inch)<br>Extended rod, 750 mm (29.53 inch)<br>Extended rod, 1 000 mm (39.37 inch)<br>Extended rod, 1 250 mm (49.21 inch)<br>Extended rod, 1 350 mm (53.15 inch)<br>Extended rod, 1 500 mm (59.06 inch)<br>Extended rod, 1 750 mm (68.90 inch)<br>Extended rod, 2 000 mm (78.74 inch)<br>Add Order code Y01 and plain text:<br>"Insertion length ... mm"<br>Extended rod, 200 ... 1 000 mm (7.87 ... 39.37 inch)<br>Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)<br>Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)<br>Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)<br>Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)<br>Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch) | <b>A</b><br><b>B</b><br><b>C</b><br><b>D</b><br><b>E</b><br><b>F</b><br><b>G</b><br><b>H</b><br><b>J</b><br><b>K</b><br><b>L</b><br><b>M</b><br><b>N</b><br><b>P</b><br><b>Q</b><br><b>R</b><br><b>S</b>       |

| Selection and Ordering data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Article No.                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Pointek CLS200 - Standard - PFA Coated Rod with PFA Coated Flanged process connection</b><br>Versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.<br><b>Thermal isolator</b><br>Without thermal isolator<br>With thermal isolator [for process connection temperatures over 85 °C (185 °F)]<br><b>Remote mount electronics and mounting bracket</b><br>With 2 m (79 inch) of cable<br>With 5 m (197 inch) of cable<br><b>Wetted seals</b><br>FKM<br>FFKM [for process temperatures above -20 °C (-4 °F)]<br><b>Probe material</b><br>PFA Coated 316L stainless steel with PPS probe body<br>PFA Coated 316L stainless steel with PVDF probe body<br><b>Approvals</b><br>Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4<br>Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4<br>General Purpose (CSA, FM)<br><b>Enclosure and lid</b><br>Aluminum epoxy coated<br>2 x ½" NPT via adapter - cable inlet, IP65<br>2 x M20 x 1.5 cable inlet, IP65<br>2 x ½" NPT via adapter - cable inlet, IP68<br>2 x M20 x 1.5 cable inlet, IP68 | <b>7ML5634-</b><br>                                                                                             |
| <b>Selection and Ordering data</b><br><b>Further designs</b><br>Please add "-Z" to Article No. and specify Order code(s).<br>Total insertion length: enter the total insertion length in plain text description<br>Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text<br>Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000<br>Material inspection Certificate Type 3.1 per EN 10204<br>SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]<br><b>Operating Instructions</b><br>All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a><br><b>Accessories</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Order code</b><br><b>Y01</b><br><b>Y15</b><br><b>C11</b><br><b>C12</b><br><b>C20</b><br><b>See page 4/34</b> |

## Overview



Pointek CLS200 (digital version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe. The digital version includes PROFIBUS PA, an LCD display, and advanced diagnostic features.

## Benefits

- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- High sensitivity allows installation in a wide range of liquids, solids or slurry applications
- Integral LCD display allows for easy menu-driven setup
- PROFIBUS PA communication (SIMATIC PDM compatible)

## Application

Pointek CLS200 digital version provides an integral LCD display for stand-alone use, and also provides PROFIBUS PA communication (Profile version 3.0, Class B) for connection to a network.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 30 V DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The menu-driven setup allows precise control of the switch point signal damping and alarm functions.


When connected to the PROFIBUS network, advanced diagnostics and set up using SIMATIC PDM are possible.

The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).

- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

## Configuration


### Installation

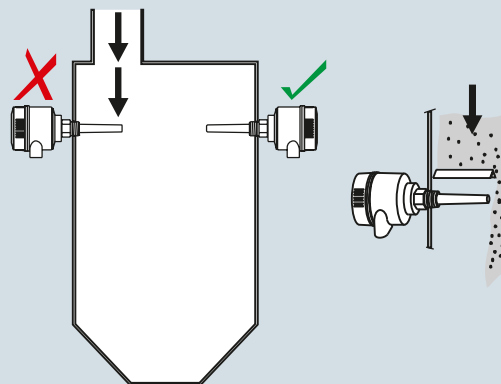

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

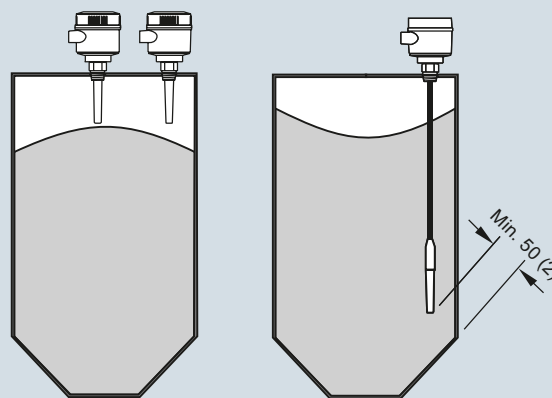

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

## Level Measurement

### Point level measurement - RF Capacitance switches

#### Pointek CLS200 - Digital

#### Technical specifications

|                                                  |                                                                                                                  |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Mode of operation</b>                         |                                                                                                                  |
| Measuring principle                              | Inverse frequency shift capacitive level detection                                                               |
| <b>Input</b>                                     |                                                                                                                  |
| Measured variable                                | Change in picoFarad (pF)                                                                                         |
| <b>Output</b>                                    |                                                                                                                  |
| Output signal                                    |                                                                                                                  |
| • Solid-state output                             |                                                                                                                  |
| - Output                                         | Galvanically isolated                                                                                            |
| - Protection                                     | Against reversed polarity (bipolar)                                                                              |
| - Max. switching voltage                         | • 30 V (DC)<br>• 30 V peak (AC)                                                                                  |
| - Max. load current                              | 82 mA                                                                                                            |
| - Voltage drop                                   | < 1 V, typical at 50 mA                                                                                          |
| - Time delay (ON and/or OFF)                     | Programmable by user (0 ... 100 s)                                                                               |
| • Fail-safe mode                                 | Min. or max.                                                                                                     |
| • Connection                                     | Removable terminal block                                                                                         |
| <b>Rated operating conditions<sup>1)</sup></b>   |                                                                                                                  |
| Installation conditions                          |                                                                                                                  |
| • Location                                       | Indoor/outdoor                                                                                                   |
| Ambient conditions                               |                                                                                                                  |
| • Ambient temperature                            | -40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>                                                                   |
| • Installation category                          | II                                                                                                               |
| • Pollution degree                               | 4                                                                                                                |
| Medium conditions                                | Liquids, bulk solids, slurries, and interfaces                                                                   |
| • Relative dielectric constant $\epsilon_r$      | Min. 1.5                                                                                                         |
| • Process temperature                            |                                                                                                                  |
| - Without thermal isolator                       | -40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>                                                                   |
| - With thermal isolator                          | -40 ... +125 °C (-40 ... +257 °F)                                                                                |
| • Process pressure (rod version)                 | -1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)                                                                |
| • Process pressure (cable version) <sup>3)</sup> | -1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)                                                                |
| • Process pressure (sliding coupling version)    | -1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)                                                                |
| <b>Design</b>                                    |                                                                                                                  |
| Material                                         |                                                                                                                  |
| • Enclosure                                      | Epoxy-coated aluminum with gasket                                                                                |
| • Optional thermal isolator                      | 316L stainless steel                                                                                             |
| Connection                                       | Removable terminal block, max. 2.5 mm <sup>2</sup>                                                               |
| Degree of protection                             | IP65/Type 4/NEMA 4 (optional IP68)                                                                               |
| Cable inlet                                      | 2 x M20 x 1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)                                |
| Electromagnetic compatibility                    | To comply with CE EMC regulations (where applicable); the CLS200 should be installed per the instruction manual. |

|                                                                                                                                                                                              |                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power supply</b>                                                                                                                                                                          |                                                                                                                                                                               |
| Bus voltage                                                                                                                                                                                  | Standard: 12 ... 30 V DC<br>Intrinsically Safe: 12 ... 24 V DC                                                                                                                |
| Current consumption                                                                                                                                                                          | 12.5 mA                                                                                                                                                                       |
| <b>Certificates and approvals</b>                                                                                                                                                            |                                                                                                                                                                               |
| General Purpose                                                                                                                                                                              | CSA, FM, CE, RCM                                                                                                                                                              |
| Dust Ignition Proof                                                                                                                                                                          | ATEX II 1/2 D T100 °C                                                                                                                                                         |
| Dust Ignition Proof with IS Probe                                                                                                                                                            | CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                |
| Flameproof Enclosure with IS Probe                                                                                                                                                           | ATEX II 1/2 G EEx d[ia] IIC T6 ... T4<br>ATEX II 1/2 D T100 °C                                                                                                                |
| Explosion Proof with IS Probe                                                                                                                                                                | CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                   |
| Intrinsically Safe <sup>4)</sup>                                                                                                                                                             | ATEX II 1 G EEx ia IIC T6 ... T4<br>ATEX II 1/2 D IP6X T100 °C<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4 |
| Non-incendive                                                                                                                                                                                | CSA/FM Class I, Div. 2, Groups A, B, C, D<br>CSA/FM Class II, Div. 2, Groups F, G<br>CSA/FM Class III T4 or T6                                                                |
| Non-Sparking                                                                                                                                                                                 | ATEX II 3 G Ex nA II T6 ... T4<br>ATEX II 2 D IP6X T100 °C                                                                                                                    |
| Marine                                                                                                                                                                                       | Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5                                                                                                                  |
| Others                                                                                                                                                                                       | Pattern Approval (China)                                                                                                                                                      |
| <b>Communication</b>                                                                                                                                                                         |                                                                                                                                                                               |
| PROFIBUS PA (IEC 61158 CPF3 CP3/2)<br>Bus physical layer: IEC 61158-2 MBP (IS)<br>Device profile: PROFIBUS PA profile for Process Control Devices Version 3.0, Class B<br>FISCO field device |                                                                                                                                                                               |

<sup>1)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 4/35.

<sup>2)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

<sup>3)</sup> Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 4/35.

<sup>4)</sup> Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection

**Level Measurement**

## Point level measurement - RF Capacitance switches

**Pointek CLS200 - Digital**

| <b>Design: Probe</b>           |                                                                                                                                                                                                                                     |                                                        |                                                                                                                                                                                                                                     |                                                                                                                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | <b>Rod version</b>                                                                                                                                                                                                                  | <b>Sanitary version</b>                                | <b>Cable version</b>                                                                                                                                                                                                                | <b>Sliding Coupling version</b>                                                                                                                                                           |
| Max. length                    | 5 500 mm (216.53 inch)                                                                                                                                                                                                              | 5 500 mm (216.53 inch)                                 | <ul style="list-style-type: none"> <li>• 30 000 mm (1 181.1 inch) liquids and slurries</li> <li>• 5 000 mm (196.85 inch) solids (under loads)</li> </ul>                                                                            | 5 500 mm (216.53 inch)                                                                                                                                                                    |
| Process connection             | R ¾", 1", 1¼", 1½"<br>[(BSPT), EN 10226/PT (JIS-T), JIS B 0203]<br>¾", 1", 1¼", 1½" NPT<br>[(Taper), ANSI/ASME B1.20.1]<br>G ¾", 1", 1½"<br>[(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]<br>316L stainless steel<br>ASME/EN flange | 1½", 2" sanitary fitting clamp<br>316L stainless steel | R ¾", 1", 1¼", 1½"<br>[(BSPT), EN 10226/PT (JIS-T), JIS B 0203]<br>¾", 1", 1¼", 1½" NPT<br>[(Taper), ANSI/ASME B1.20.1]<br>G ¾", 1", 1½"<br>[(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]<br>316L stainless steel<br>ASME/EN flange | R ¾", 1", 1¼", 1½"<br>[(BSPT), EN 10226/PT (JIS-T), JIS B 0203]<br>¾", 1", 1¼", 1½" NPT<br>[(Taper), ANSI/ASME B1.20.1]<br>G ¾", 1", 1½"<br>[(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] |
| Extension material             | 316L stainless steel<br>optional PFA coated <sup>1)</sup>                                                                                                                                                                           | 316L stainless steel                                   | Fluoroethylene propylene (FEP) cable with stainless steel core                                                                                                                                                                      | 316L stainless steel                                                                                                                                                                      |
| Sensor wetted parts            | PPS (optional PVDF)                                                                                                                                                                                                                 | PPS (optional PVDF)                                    | PPS (optional PVDF)                                                                                                                                                                                                                 | PPS (optional PVDF)                                                                                                                                                                       |
| O-ring seal material           | FKM (optional FFKM) <sup>2)</sup>                                                                                                                                                                                                   | FKM (optional FFKM) <sup>2)</sup>                      | FKM (optional FFKM) <sup>2)</sup>                                                                                                                                                                                                   | FKM (optional FFKM) <sup>2)</sup>                                                                                                                                                         |
| Thermal isolator <sup>3)</sup> | Optional                                                                                                                                                                                                                            | Optional                                               | Optional                                                                                                                                                                                                                            | Optional                                                                                                                                                                                  |
| Extension                      | User selected length                                                                                                                                                                                                                | User selected length                                   | Cable extension                                                                                                                                                                                                                     | User selected length                                                                                                                                                                      |

<sup>1)</sup> PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

<sup>2)</sup> For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit [http://www.automation.siemens.com/aspa\\_app](http://www.automation.siemens.com/aspa_app).

<sup>3)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F).

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 - Digital

#### Selection and Ordering data

Article No.

#### Pointek CLS200 - Digital - Rod with Threaded or Flanged process connection

7ML5640-  
- 0

Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

#### Process connection

Threaded, 316L stainless steel

¾" NPT [(Taper), ANSI/ASME B1.20.1]

1" NPT [(Taper), ANSI/ASME B1.20.1]

1¼" NPT [(Taper), ANSI/ASME B1.20.1]

1½" NPT [(Taper), ANSI/ASME B1.20.1]

R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]

R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]

R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]

G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

Welded flange, 316L stainless steel, raised face

1" ASME, 150 lb

1" ASME, 300 lb

1" ASME, 600 lb

1½" ASME, 150 lb

1½" ASME, 300 lb

1½" ASME, 600 lb

2" ASME, 150 lb

2" ASME, 300 lb

2" ASME, 600 lb

3" ASME, 150 lb

3" ASME, 300 lb

3" ASME, 600 lb

4" ASME, 150 lb

4" ASME, 300 lb

4" ASME, 600 lb

Welded flange, 316L stainless steel,

type A flat faced

DN 25, PN 16

DN 25, PN 40

DN 40, PN 16

DN 40, PN 40

DN 50, PN 16

DN 50, PN 40

DN 80, PN 16

DN 80, PN 40

DN 100, PN 16

DN 100, PN 40

(Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)

#### Probe length

(length from flange face)

(threaded lengths include process thread)

Note: No Y01 needed in Order code for standard lengths

Compact [threaded 120 mm (4.72 inch), Flanged 98 mm (3.86 inch)]

Extended rod, 250 mm (9.84 inch)

Extended rod, 350 mm (13.78 inch)

Extended rod, 500 mm (19.69 inch)

Extended rod, 750 mm (29.53 inch)

Extended rod, 1 000 mm (39.37 inch)

Extended rod, 1 250 mm (49.21 inch)

Extended rod, 1 350 mm (53.15 inch)

Extended rod, 1 500 mm (59.06 inch)

Extended rod, 1 750 mm (68.90 inch)

Extended rod, 2 000 mm (78.74 inch)

#### Selection and Ordering data

Article No.

#### Pointek CLS200 - Digital - Rod with Threaded or Flanged process connection

7ML5640-  
- 0

Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.

Add Order code Y01 and plain text: "Insertion length ... mm"

Extended rod, 210 ... 1 000 mm (8.27 ... 39.37 inch)

Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)

Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)

Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)

Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)

Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)

#### Thermal isolator

Without thermal isolator

With thermal isolator [for process connection temperatures over 85 °C (185 °F)]

#### Remote mount electronics and mounting bracket

With 2 m (79 inch) of cable<sup>2)</sup>

With 5 m (197 inch) of cable<sup>2)</sup>

#### Wetted seals

FKM

FFKM [for process temperatures above -20 °C (-4 °F)]

#### Probe material

316L stainless steel with PPS probe body

316L stainless steel with PVDF probe body

#### Approvals

Non-Sparking:

CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C

Dust Ignition Proof:

CE, RCM, ATEX II 1/2 D T100 °C

Intrinsically Safe:<sup>1)</sup>

CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II 1/2 D IP6X T100 °C

Flameproof Enclosure with IS Probe:

CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C

Non-incendive:

CSA/FM Class I, Div. 2, Groups A, B, C, D  
CSA/FM Class II, Div. 2, Groups F, G  
CSA/FM Class III T4 or T6

Dust Ignition Proof with IS Probe:

CSA/FM Class II, Div. 1, Groups E, F, G  
CSA/FM Class III T4

Intrinsically Safe:<sup>1)</sup>

CSA/FM Class I, Div. 1, Groups A, B, C, D  
CSA/FM Class II, Div. 1, Groups E, F, G  
CSA/FM Class III T4

Explosion Proof with IS Probe:

CSA/FM Class I, Div. 1, Groups A, B, C, D  
CSA/FM Class II, Div. 1, Groups E, F, G  
CSA/FM Class III T4


General Purpose (CSA, FM)

General Purpose (CE, RCM)


## Level Measurement

## Point level measurement - RF Capacitance switches

## Pointek CLS200 - Digital

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>Pointek CLS200 - Digital - Rod with Threaded or Flanged process connection</b>                                                                                                                                                                                                           | <b>7ML5640-</b>                                                                   |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |  |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                                    |                                                                                   |
| Aluminum epoxy coated                                                                                                                                                                                                                                                                       |                                                                                   |
| 2 x 1/2" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                                | ⬢ <b>A</b>                                                                        |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                             | ⬢ <b>B</b>                                                                        |
| 2 x 1/2" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                                | ⬢ <b>C</b>                                                                        |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                             | ⬢ <b>D</b>                                                                        |
| 1) Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection                                                                                                                                                                                                    |                                                                                   |
| 2) Available with Approvals options F, G, H, J, and K                                                                                                                                                                                                                                       |                                                                                   |
| ⬢ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ⬢. For details see page 10/11 in the appendix.                                                                                                                                               |                                                                                   |

| Selection and Ordering data                                                                                                                                                                                         | Order code           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>Further designs</b>                                                                                                                                                                                              |                      |
| Please add <b>"-Z"</b> to Article No. and specify Order code(s).                                                                                                                                                    |                      |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | ⬢ <b>Y01</b>         |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:<br>Measuring-point number/identification<br>(max. 27 characters) specify in plain text                                                                         | ⬢ <b>Y15</b>         |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | ⬢ <b>C11</b>         |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | ⬢ <b>C12</b>         |
| <b>Operating Instructions</b>                                                                                                                                                                                       |                      |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |                      |
| <b>Accessories</b>                                                                                                                                                                                                  | <b>See page 4/34</b> |
| ⬢ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ⬢. For details see page 10/11 in the appendix.                                                                       |                      |

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Pointek CLS200 - Digital - Cable with Threaded or Flanged process connection</b>                                                                                                                                                                                                         | <b>7ML5641-</b>                                                                     |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |  |
| Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                         |                                                                                     |
| <b>Process connection</b>                                                                                                                                                                                                                                                                   |                                                                                     |
| Threaded, 316L stainless steel                                                                                                                                                                                                                                                              |                                                                                     |
| 3/4" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                       | ⬢ <b>0 A</b>                                                                        |
| 1" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                         | ⬢ <b>0 B</b>                                                                        |
| 1 1/4" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                     | ⬢ <b>0 C</b>                                                                        |
| 1 1/2" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                     | ⬢ <b>0 D</b>                                                                        |
| R 3/4" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                            | ⬢ <b>1 A</b>                                                                        |
| R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                              | ⬢ <b>1 B</b>                                                                        |
| R 1 1/2" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                          | ⬢ <b>1 D</b>                                                                        |
| G 3/4" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                        | ⬢ <b>3 A</b>                                                                        |
| G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                          | ⬢ <b>3 B</b>                                                                        |
| G 1 1/2" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                      | ⬢ <b>3 D</b>                                                                        |
| <b>Welded flange, 316L stainless steel, raised face</b>                                                                                                                                                                                                                                     |                                                                                     |
| 1" ASME, 150 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 A</b>                                                                        |
| 1" ASME, 300 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 B</b>                                                                        |
| 1" ASME, 600 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 C</b>                                                                        |
| 1 1/2" ASME, 150 lb                                                                                                                                                                                                                                                                         | ⬢ <b>5 D</b>                                                                        |
| 1 1/2" ASME, 300 lb                                                                                                                                                                                                                                                                         | ⬢ <b>5 E</b>                                                                        |
| 1 1/2" ASME, 600 lb                                                                                                                                                                                                                                                                         | ⬢ <b>5 F</b>                                                                        |
| 2" ASME, 150 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 G</b>                                                                        |
| 2" ASME, 300 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 H</b>                                                                        |
| 2" ASME, 600 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 J</b>                                                                        |
| 3" ASME, 150 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 K</b>                                                                        |
| 3" ASME, 300 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 L</b>                                                                        |
| 3" ASME, 600 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 M</b>                                                                        |
| 4" ASME, 150 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 N</b>                                                                        |
| 4" ASME, 300 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 P</b>                                                                        |
| 4" ASME, 600 lb                                                                                                                                                                                                                                                                             | ⬢ <b>5 Q</b>                                                                        |
| <b>Welded flange, 316L stainless steel, Type A flat faced</b>                                                                                                                                                                                                                               |                                                                                     |
| DN 25, PN 16                                                                                                                                                                                                                                                                                | ⬢ <b>6 A</b>                                                                        |
| DN 25, PN 40                                                                                                                                                                                                                                                                                | ⬢ <b>6 B</b>                                                                        |
| DN 40, PN 16                                                                                                                                                                                                                                                                                | ⬢ <b>6 C</b>                                                                        |
| DN 40, PN 40                                                                                                                                                                                                                                                                                | ⬢ <b>6 D</b>                                                                        |
| DN 50, PN 16                                                                                                                                                                                                                                                                                | ⬢ <b>6 E</b>                                                                        |
| DN 50, PN 40                                                                                                                                                                                                                                                                                | ⬢ <b>6 F</b>                                                                        |
| DN 80, PN 16                                                                                                                                                                                                                                                                                | ⬢ <b>6 G</b>                                                                        |
| DN 80, PN 40                                                                                                                                                                                                                                                                                | ⬢ <b>6 H</b>                                                                        |
| DN 100, PN 16                                                                                                                                                                                                                                                                               | ⬢ <b>6 J</b>                                                                        |
| DN 100, PN 40                                                                                                                                                                                                                                                                               | ⬢ <b>6 K</b>                                                                        |
| (Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)                                                                                                                                                                    |                                                                                     |

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 - Digital

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Digital - Cable with Threaded or Flanged process connection</b>                                                                                                                                                                                                         | <b>7ML5641-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. | <b>0</b>        |
| <b>Probe length</b><br>(length from flange face)<br>(threaded lengths include process thread)<br>Note: No Y01 needed in Order code for standard lengths                                                                                                                                     |                 |
| Extended cable, 3 000 mm (118.11 inch), length can be determined by customer on assembly                                                                                                                                                                                                    | <b>A</b>        |
| Extended cable, 6 000 mm (236.22 inch), length can be determined by customer on assembly                                                                                                                                                                                                    | <b>B</b>        |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                                |                 |
| Extended cable, 500 ... 5 000 mm (19.69 ... 196.85 inch)                                                                                                                                                                                                                                    | <b>C</b>        |
| Extended cable, 5 001 ... 10 000 mm (196.89 ... 393.70 inch)                                                                                                                                                                                                                                | <b>D</b>        |
| Extended cable, 10 001 ... 15 000 mm (393.74 ... 590.55 inch)                                                                                                                                                                                                                               | <b>E</b>        |
| Extended cable, 15 001 ... 20 000 mm (590.59 ... 787.40 inch)                                                                                                                                                                                                                               | <b>F</b>        |
| Extended cable, 20 001 ... 25 000 mm (787.44 ... 984.25 inch)                                                                                                                                                                                                                               | <b>G</b>        |
| Extended cable, 25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)                                                                                                                                                                                                                             | <b>H</b>        |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                                     |                 |
| Without thermal isolator                                                                                                                                                                                                                                                                    | <b>0</b>        |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                             | <b>1</b>        |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                                        |                 |
| With 2 m (79 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                                   | <b>2</b>        |
| With 5 m (197 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                                  | <b>3</b>        |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                         |                 |
| FKM and PTFE                                                                                                                                                                                                                                                                                | <b>0</b>        |
| FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                               | <b>1</b>        |
| <b>Probe material</b>                                                                                                                                                                                                                                                                       |                 |
| FEP jacketed cable with PPS probe body                                                                                                                                                                                                                                                      | <b>0</b>        |
| FEP jacketed cable with PVDF probe body                                                                                                                                                                                                                                                     | <b>1</b>        |
| <b>Approvals</b>                                                                                                                                                                                                                                                                            |                 |
| Non-Sparking:<br>CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C                                                                                                                                                                                                          | <b>B</b>        |
| Dust Ignition Proof:<br>CE, RCM, ATEX II 1/2 D T100 °C                                                                                                                                                                                                                                      | <b>C</b>        |
| Intrinsically Safe: <sup>1)</sup><br>CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II 1/2 D IP6X T100 °C                                                                                                                                                                                  | <b>D</b>        |
| Flameproof Enclosure with IS Probe:<br>CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                                                | <b>E</b>        |
| Non-incendive:<br>CSA/FM Class I, Div. 2, Groups A, B, C, D<br>CSA/FM Class II, Div. 2, Groups F, G<br>CSA/FM Class III T4 or T6                                                                                                                                                            | <b>F</b>        |
| Dust Ignition Proof with IS Probe:<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                                                                        | <b>G</b>        |
| Intrinsically Safe: <sup>1)</sup><br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                            | <b>H</b>        |
| Explosion Proof with IS Probe:<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4                                                                                                                                               | <b>J</b>        |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                                   | <b>K</b>        |
| General Purpose (CE, RCM)                                                                                                                                                                                                                                                                   | <b>L</b>        |

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Digital - Cable with Threaded or Flanged process connection</b>                                                                                                                                                                                                         | <b>7ML5641-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. | <b>0</b>        |
| <b>Enclosure and lid</b><br>Aluminum epoxy coated                                                                                                                                                                                                                                           |                 |
| 2 x ½" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                                  | <b>A</b>        |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                             | <b>B</b>        |
| 2 x ½" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                                  | <b>C</b>        |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                             | <b>D</b>        |
| 1) Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection                                                                                                                                                                                                    |                 |
| 2) Available with Approvals options F, G, H, J, and K                                                                                                                                                                                                                                       |                 |
| ◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 10/11 in the appendix.                                                                                                                                               |                 |

| Selection and Ordering data                                                                                                                                                                                         | Order code           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>Further designs</b>                                                                                                                                                                                              |                      |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |                      |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | <b>Y01</b>           |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:                                                                                                                                                                | <b>Y15</b>           |
| Measuring-point number/identification (max. 27 characters) specify in plain text                                                                                                                                    |                      |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | <b>C11</b>           |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | <b>C12</b>           |
| <b>Operating Instructions</b>                                                                                                                                                                                       |                      |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |                      |
| <b>Accessories</b>                                                                                                                                                                                                  | <b>See page 4/34</b> |

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 10/11 in the appendix.

## Level Measurement

## Point level measurement - RF Capacitance switches

## Pointek CLS200 - Digital

| Selection and Ordering data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Article No.                                                                                          | Selection and Ordering data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Article No.                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Pointek CLS200 - Digital - Rod with Sanitary process connection</b><br>Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.<br>Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                      | <b>7ML5642-</b><br> | <b>Pointek CLS200 - Digital - Rod with Sanitary process connection</b><br>Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe.                                                                                                                                                                                                                                   | <b>7ML5642-</b><br> |
| <b>Process connection</b><br>Sanitary 316L stainless steel<br>1" sanitary fitting clamp<br>1½" sanitary fitting clamp<br>2" sanitary fitting clamp<br>2½" sanitary fitting clamp<br>3" sanitary fitting clamp<br>(Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard.)                                                                                                                                                                                                                                       | 8 A<br>8 B<br>8 C<br>8 D<br>8 E                                                                      | Non-incendive:<br>CSA/FM Class I, Div. 2, Groups A, B, C, D<br>CSA/FM Class II, Div. 2, Groups F, G<br>CSA/FM Class III T4 or T6<br>Dust Ignition Proof with IS Probe:<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4<br>Intrinsically Safe: <sup>1)</sup><br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4<br>Explosion Proof with IS Probe:<br>CSA/FM Class I, Div. 1, Groups A, B, C, D<br>CSA/FM Class II, Div. 1, Groups E, F, G<br>CSA/FM Class III T4<br>General Purpose (CSA, FM)<br>General Purpose (CE, RCM) | F<br>G<br>H<br>J<br>K<br>L                                                                             |
| <b>Probe length</b><br>(length from process connection face)<br>Note: No Y01 needed in Order code for standard lengths<br>Compact, 98 mm (3.86 inch)<br>Extended rod, 250 mm (9.84 inch)<br>Extended rod, 350 mm (13.78 inch)<br>Extended rod, 500 mm (19.69 inch)<br>Extended rod, 750 mm (29.53 inch)<br>Extended rod, 1 000 mm (39.37 inch)<br>Extended rod, 1 250 mm (49.21 inch)<br>Extended rod, 1 350 mm (53.15 inch)<br>Extended rod, 1 500 mm (59.06 inch)<br>Extended rod, 1 750 mm (68.90 inch)<br>Extended rod, 2 000 mm (78.74 inch) | A<br>B<br>C<br>D<br>E<br>F<br>G<br>H<br>J<br>K<br>L                                                  | <b>Enclosure and lid</b><br>Aluminum epoxy coated<br>2 x ½" NPT via adapter - cable inlet, IP65<br>2 x M20 x 1.5 cable inlet, IP65<br>2 x ½" NPT via adapter - cable inlet, IP68<br>2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                                                                                                                                                     | A<br>B<br>C<br>D                                                                                       |
| Add Order code Y01 and plain text:<br>"Insertion length ... mm"<br>Extended rod, 110 ... 350 mm (4.3 ... 13.78 inch)<br>Extended rod, 351 ... 1 000 mm (13.82 ... 39.37 inch)<br>Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)<br>Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)<br>Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)<br>Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)<br>Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)                                                       | M<br>N<br>P<br>Q<br>R<br>S<br>T                                                                      | 1) Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection<br>2) Available with Approvals options F, G, H, J, and K<br>We can offer shorter delivery times for configurations designated with the Quick Ship Symbol  . For details see page 10/11 in the appendix.                                                                                                                                                                                                                     |                                                                                                        |
| <b>Thermal isolator</b><br>Without thermal isolator<br>With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                                                                                                                                                                                                                            | 0<br>1                                                                                               | <b>Selection and Ordering data</b><br><b>Further designs</b><br>Please add "-Z" to Article No. and specify Order code(s).<br>Total insertion length: enter the total insertion length in plain text description<br>Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:<br>Measuring-point number/identification (max. 27 characters) specify in plain text<br>Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000<br>Material inspection Certificate Type 3.1 per EN 10204                                                                                                           | Order code<br>Y01<br>Y15<br>C11<br>C12                                                                 |
| <b>Remote mount electronics and mounting bracket</b><br>With 2 m (79 inch) of cable <sup>2)</sup><br>With 5 m (197 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                                                                                                                                                                                   | 2<br>3                                                                                               | <b>Operating Instructions</b><br>All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a>                                                                                                                                                                                                                                                                                                                                                    |                                                                                                        |
| <b>Wetted seals</b><br>FKM<br>FFKM [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0<br>1                                                                                               | <b>Accessories</b><br>We can offer shorter delivery times for configurations designated with the Quick Ship Symbol  . For details see page 10/11 in the appendix.                                                                                                                                                                                                                                                                                                                                                    | See page 4/34                                                                                          |
| <b>Probe material</b><br>316L stainless steel with PPS probe body<br>316L stainless steel with PVDF probe body                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0<br>1                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                        |
| <b>Approvals</b><br>Non-Sparking:<br>CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C<br>Dust Ignition Proof:<br>CE, RCM, ATEX II 1/2 D T100 °C<br>Intrinsically Safe: <sup>1)</sup><br>CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II 1/2 D IP6X T100 °C<br>Flameproof Enclosure with IS Probe:<br>CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                    | B<br>C<br>D<br>E                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                        |

## Level Measurement

### Point level measurement - RF Capacitance switches

#### Pointek CLS200 - Digital

4

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Digital - Rod with Sliding coupling with Threaded process connection</b>                                                                                                                                                                                                | <b>7ML5643-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |                 |
| ➔ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                       |                 |
| <b>Process connection</b>                                                                                                                                                                                                                                                                   |                 |
| Threaded, 316L stainless steel                                                                                                                                                                                                                                                              |                 |
| ¾" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                         | 0 A             |
| 1" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                         | 0 B             |
| 1¼" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                        | 0 C             |
| 1½" NPT [(Taper), ANSI/ASME B1.20.1]                                                                                                                                                                                                                                                        | 0 D             |
| R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                              | 1 A             |
| R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                              | 1 B             |
| R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]                                                                                                                                                                                                                                             | 1 D             |
| G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                          | 3 A             |
| G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                          | 3 B             |
| G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]                                                                                                                                                                                                                                         | 3 D             |
| <b>Probe length</b>                                                                                                                                                                                                                                                                         |                 |
| (length from flange face)                                                                                                                                                                                                                                                                   |                 |
| (threaded lengths include process thread)                                                                                                                                                                                                                                                   |                 |
| Note: No Y01 needed in Order code for standard lengths                                                                                                                                                                                                                                      |                 |
| Extended rod, 350 mm (13.78 inch)                                                                                                                                                                                                                                                           | C               |
| Extended rod, 500 mm (19.69 inch)                                                                                                                                                                                                                                                           | D               |
| Extended rod, 750 mm (29.53 inch)                                                                                                                                                                                                                                                           | E               |
| Extended rod, 1 000 mm (39.37 inch)                                                                                                                                                                                                                                                         | F               |
| Extended rod, 1 250 mm (49.21 inch)                                                                                                                                                                                                                                                         | G               |
| Extended rod, 1 350 mm (53.15 inch)                                                                                                                                                                                                                                                         | H               |
| Extended rod, 1 500 mm (59.06 inch)                                                                                                                                                                                                                                                         | J               |
| Extended rod, 1 750 mm (68.90 inch)                                                                                                                                                                                                                                                         | K               |
| Extended rod, 2 000 mm (78.74 inch)                                                                                                                                                                                                                                                         | L               |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                                |                 |
| Extended rod, 350 ... 1 000 mm (13.82 ... 39.37 inch)                                                                                                                                                                                                                                       | M               |
| Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)                                                                                                                                                                                                                                     | N               |
| Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)                                                                                                                                                                                                                                    | P               |
| Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)                                                                                                                                                                                                                                   | Q               |
| Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)                                                                                                                                                                                                                                   | R               |
| Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)                                                                                                                                                                                                                                   | S               |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                                     |                 |
| Without thermal isolator                                                                                                                                                                                                                                                                    | 0               |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                             | 1               |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                                        |                 |
| With 2 m (79 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                                   | 2               |
| With 5 m (197 inch) of cable <sup>2)</sup>                                                                                                                                                                                                                                                  | 3               |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                         |                 |
| FKM and PTFE                                                                                                                                                                                                                                                                                | 0               |
| FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                               | 1               |
| <b>Probe material</b>                                                                                                                                                                                                                                                                       |                 |
| 316L stainless steel with PPS probe body                                                                                                                                                                                                                                                    | 0               |
| 316L stainless steel with PVDF probe body                                                                                                                                                                                                                                                   | 1               |
| <b>Approvals</b>                                                                                                                                                                                                                                                                            |                 |
| Non-Sparking:                                                                                                                                                                                                                                                                               |                 |
| CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C                                                                                                                                                                                                                           | B               |
| Dust Ignition Proof:                                                                                                                                                                                                                                                                        |                 |
| CE, RCM, ATEX II 1/2 D T100 °C                                                                                                                                                                                                                                                              | C               |
| Intrinsically Safe: <sup>1)</sup>                                                                                                                                                                                                                                                           |                 |
| CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II 1/2 D IP6X T100 °C                                                                                                                                                                                                                       | D               |

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Digital - Rod with Sliding coupling with Threaded process connection</b>                                                                                                                                                                                                | <b>7ML5643-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. |                 |
| Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C                                                                                                                                                                                   | E               |
| Non-incendive:                                                                                                                                                                                                                                                                              | F               |
| CSA/FM Class I, Div. 2, Groups A, B, C, D                                                                                                                                                                                                                                                   |                 |
| CSA/FM Class II, Div. 2, Groups F, G                                                                                                                                                                                                                                                        |                 |
| CSA/FM Class III T4 or T6                                                                                                                                                                                                                                                                   |                 |
| Dust Ignition Proof with IS Probe:                                                                                                                                                                                                                                                          | G               |
| CSA/FM Class II, Div. 1, Groups E, F, G                                                                                                                                                                                                                                                     |                 |
| CSA/FM Class III T4                                                                                                                                                                                                                                                                         |                 |
| Intrinsically Safe: <sup>1)</sup>                                                                                                                                                                                                                                                           | H               |
| CSA/FM Class I, Div. 1, Groups A, B, C, D                                                                                                                                                                                                                                                   |                 |
| CSA/FM Class II, Div. 1, Groups E, F, G                                                                                                                                                                                                                                                     |                 |
| CSA/FM Class III T4                                                                                                                                                                                                                                                                         |                 |
| Explosion Proof with IS Probe:                                                                                                                                                                                                                                                              | J               |
| CSA/FM Class I, Div. 1, Groups A, B, C, D                                                                                                                                                                                                                                                   |                 |
| CSA/FM Class II, Div. 1, Groups E, F, G                                                                                                                                                                                                                                                     |                 |
| CSA/FM Class III T4                                                                                                                                                                                                                                                                         |                 |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                                   | K               |
| General Purpose (CE, RCM)                                                                                                                                                                                                                                                                   | L               |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                                    |                 |
| Aluminum epoxy coated                                                                                                                                                                                                                                                                       |                 |
| 2 x ½" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                                  | A               |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                             | B               |
| 2 x ½" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                                  | C               |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                             | D               |
| 1) Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection                                                                                                                                                                                                    |                 |
| 2) Available with Approvals options F, G, H, J, and K                                                                                                                                                                                                                                       |                 |
| ➔ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ➔. For details see page 10/11 in the appendix.                                                                                                                                               |                 |

| Selection and Ordering data                                                                                                                                                                                         | Order code    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Further designs</b>                                                                                                                                                                                              |               |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |               |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | Y01           |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:                                                                                                                                                                | Y15           |
| Measuring-point number/identification (max. 27 characters) specify in plain text                                                                                                                                    |               |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | C11           |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | C12           |
| <b>Operating Instructions</b>                                                                                                                                                                                       |               |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |               |
| <b>Accessories</b>                                                                                                                                                                                                  | See page 4/34 |

➔ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ➔. For details see page 10/11 in the appendix.

## Level Measurement

## Point level measurement - RF Capacitance switches

## Pointek CLS200 - Digital

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Digital - PFA Rod with PFA Flanged process connection</b>                                                                                                                                                                                                               | <b>7ML5644-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. | <b>0</b>        |
| ➔ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.                                                                                                                                                                                                       |                 |
| <b>Process connection</b>                                                                                                                                                                                                                                                                   |                 |
| Welded flange, PFA coated, 316L stainless steel, raised face                                                                                                                                                                                                                                |                 |
| 1" ASME, 150 lb                                                                                                                                                                                                                                                                             | <b>5 A</b>      |
| 1" ASME, 300 lb                                                                                                                                                                                                                                                                             | <b>5 B</b>      |
| 1" ASME, 600 lb                                                                                                                                                                                                                                                                             | <b>5 C</b>      |
| 1½" ASME, 150 lb                                                                                                                                                                                                                                                                            | <b>5 D</b>      |
| 1½" ASME, 300 lb                                                                                                                                                                                                                                                                            | <b>5 E</b>      |
| 1½" ASME, 600 lb                                                                                                                                                                                                                                                                            | <b>5 F</b>      |
| 2" ASME, 150 lb                                                                                                                                                                                                                                                                             | <b>5 G</b>      |
| 2" ASME, 300 lb                                                                                                                                                                                                                                                                             | <b>5 H</b>      |
| 2" ASME, 600 lb                                                                                                                                                                                                                                                                             | <b>5 J</b>      |
| 3" ASME, 150 lb                                                                                                                                                                                                                                                                             | <b>5 K</b>      |
| 3" ASME, 300 lb                                                                                                                                                                                                                                                                             | <b>5 L</b>      |
| 3" ASME, 600 lb                                                                                                                                                                                                                                                                             | <b>5 M</b>      |
| 4" ASME, 150 lb                                                                                                                                                                                                                                                                             | <b>5 N</b>      |
| 4" ASME, 300 lb                                                                                                                                                                                                                                                                             | <b>5 P</b>      |
| 4" ASME, 600 lb                                                                                                                                                                                                                                                                             | <b>5 Q</b>      |
| Welded flange, PFA coated, 316L stainless steel, Type A flat faced                                                                                                                                                                                                                          |                 |
| DN 25, PN 16                                                                                                                                                                                                                                                                                | <b>6 A</b>      |
| DN 25, PN 40                                                                                                                                                                                                                                                                                | <b>6 B</b>      |
| DN 40, PN 16                                                                                                                                                                                                                                                                                | <b>6 C</b>      |
| DN 40, PN 40                                                                                                                                                                                                                                                                                | <b>6 D</b>      |
| DN 50, PN 16                                                                                                                                                                                                                                                                                | <b>6 E</b>      |
| DN 50, PN 40                                                                                                                                                                                                                                                                                | <b>6 F</b>      |
| DN 80, PN 16                                                                                                                                                                                                                                                                                | <b>6 G</b>      |
| DN 80, PN 40                                                                                                                                                                                                                                                                                | <b>6 H</b>      |
| DN 100, PN 16                                                                                                                                                                                                                                                                               | <b>6 J</b>      |
| DN 100, PN 40                                                                                                                                                                                                                                                                               | <b>6 K</b>      |
| (Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)                                                                                                                                                                    |                 |
| <b>Probe length</b>                                                                                                                                                                                                                                                                         |                 |
| (length from process connection face)                                                                                                                                                                                                                                                       |                 |
| Note: No Y01 needed in Order code for standard lengths                                                                                                                                                                                                                                      |                 |
| Compact, 98 mm (3.86 inch)                                                                                                                                                                                                                                                                  | <b>A</b>        |
| Extended rod, 250 mm (9.84 inch)                                                                                                                                                                                                                                                            | <b>B</b>        |
| Extended rod, 350 mm (13.78 inch)                                                                                                                                                                                                                                                           | <b>C</b>        |
| Extended rod, 500 mm (19.69 inch)                                                                                                                                                                                                                                                           | <b>D</b>        |
| Extended rod, 750 mm (29.53 inch)                                                                                                                                                                                                                                                           | <b>E</b>        |
| Extended rod, 1 000 mm (39.37 inch)                                                                                                                                                                                                                                                         | <b>F</b>        |
| Extended rod, 1 250 mm (49.21 inch)                                                                                                                                                                                                                                                         | <b>G</b>        |
| Extended rod, 1 350 mm (53.15 inch)                                                                                                                                                                                                                                                         | <b>H</b>        |
| Extended rod, 1 500 mm (59.06 inch)                                                                                                                                                                                                                                                         | <b>J</b>        |
| Extended rod, 1 750 mm (68.90 inch)                                                                                                                                                                                                                                                         | <b>K</b>        |
| Extended rod, 2 000 mm (78.74 inch)                                                                                                                                                                                                                                                         | <b>L</b>        |
| Add Order code Y01 and plain text: "Insertion length ... mm"                                                                                                                                                                                                                                |                 |
| Extended rod, 200 ... 1 000 mm (7.87 ... 39.37 inch)                                                                                                                                                                                                                                        | <b>M</b>        |
| Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch)                                                                                                                                                                                                                                     | <b>N</b>        |
| Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch)                                                                                                                                                                                                                                    | <b>P</b>        |
| Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch)                                                                                                                                                                                                                                   | <b>Q</b>        |
| Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch)                                                                                                                                                                                                                                   | <b>R</b>        |
| Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)                                                                                                                                                                                                                                   | <b>S</b>        |
| <b>Thermal isolator</b>                                                                                                                                                                                                                                                                     |                 |
| Without thermal isolator                                                                                                                                                                                                                                                                    | <b>0</b>        |
| With thermal isolator [for process connection temperatures over 85 °C (185 °F)]                                                                                                                                                                                                             | <b>1</b>        |

| Selection and Ordering data                                                                                                                                                                                                                                                                 | Article No.     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Pointek CLS200 - Digital - PFA Rod with PFA Flanged process connection</b>                                                                                                                                                                                                               | <b>7ML5644-</b> |
| Versatile inverse frequency shift capacitance level and material detection switch with optional process connection choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces, and has the ability to tune out buildup on the probe. | <b>0</b>        |
| <b>Remote mount electronics and mounting bracket</b>                                                                                                                                                                                                                                        |                 |
| With 2 m (79 inch) of cable                                                                                                                                                                                                                                                                 | <b>2</b>        |
| With 5 m (197 inch) of cable                                                                                                                                                                                                                                                                | <b>3</b>        |
| <b>Wetted seals</b>                                                                                                                                                                                                                                                                         |                 |
| FKM                                                                                                                                                                                                                                                                                         | <b>0</b>        |
| FFKM [for process temperatures above -20 °C (-4 °F)]                                                                                                                                                                                                                                        | <b>1</b>        |
| <b>Probe material</b>                                                                                                                                                                                                                                                                       |                 |
| PFA Coated 316L stainless steel with PPS probe body                                                                                                                                                                                                                                         | <b>0</b>        |
| PFA Coated 316L stainless steel with PVDF probe body                                                                                                                                                                                                                                        | <b>1</b>        |
| <b>Approvals</b>                                                                                                                                                                                                                                                                            |                 |
| Non-incendive:                                                                                                                                                                                                                                                                              |                 |
| CSA/FM Class I, Div. 2, Groups A, B, C, D                                                                                                                                                                                                                                                   | <b>F</b>        |
| CSA/FM Class II, Div. 2, Groups F, G                                                                                                                                                                                                                                                        |                 |
| CSA/FM Class III T4 or T6                                                                                                                                                                                                                                                                   |                 |
| Dust Ignition Proof with IS Probe:                                                                                                                                                                                                                                                          | <b>G</b>        |
| CSA/FM Class II, Div. 1, Groups E, F, G                                                                                                                                                                                                                                                     |                 |
| CSA/FM Class III T4                                                                                                                                                                                                                                                                         |                 |
| Intrinsically Safe: <sup>1)</sup>                                                                                                                                                                                                                                                           | <b>H</b>        |
| CSA/FM Class I, Div. 1, Groups A, B, C, D                                                                                                                                                                                                                                                   |                 |
| CSA/FM Class II, Div. 1, Groups E, F, G                                                                                                                                                                                                                                                     |                 |
| CSA/FM Class III T4                                                                                                                                                                                                                                                                         |                 |
| Explosion Proof with IS Probe:                                                                                                                                                                                                                                                              | <b>J</b>        |
| CSA/FM Class I, Div. 1, Groups A, B, C, D                                                                                                                                                                                                                                                   |                 |
| CSA/FM Class II, Div. 1, Groups E, F, G                                                                                                                                                                                                                                                     |                 |
| CSA/FM Class III T4                                                                                                                                                                                                                                                                         |                 |
| General Purpose (CSA, FM)                                                                                                                                                                                                                                                                   | <b>K</b>        |
| <b>Enclosure and lid</b>                                                                                                                                                                                                                                                                    |                 |
| Aluminum epoxy coated                                                                                                                                                                                                                                                                       |                 |
| 2 x ½" NPT via adapter - cable inlet, IP65                                                                                                                                                                                                                                                  | <b>A</b>        |
| 2 x M20 x 1.5 cable inlet, IP65                                                                                                                                                                                                                                                             | <b>B</b>        |
| 2 x ½" NPT via adapter - cable inlet, IP68                                                                                                                                                                                                                                                  | <b>C</b>        |
| 2 x M20 x 1.5 cable inlet, IP68                                                                                                                                                                                                                                                             | <b>D</b>        |

<sup>1)</sup> Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection

| Selection and Ordering data                                                                                                                                                                                         | Order code           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>Further designs</b>                                                                                                                                                                                              |                      |
| Please add "-Z" to Article No. and specify Order code(s).                                                                                                                                                           |                      |
| Total insertion length: enter the total insertion length in plain text description                                                                                                                                  | <b>Y01</b>           |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text                                                                               | <b>Y15</b>           |
| Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000                                                                                                                                               | <b>C11</b>           |
| Material inspection Certificate Type 3.1 per EN 10204                                                                                                                                                               | <b>C12</b>           |
| <b>Operating Instructions</b>                                                                                                                                                                                       |                      |
| All literature is available to download for free, in a range of languages, at <a href="http://www.siemens.com/processinstrumentation/documentation">http://www.siemens.com/processinstrumentation/documentation</a> |                      |
| <b>Accessories</b>                                                                                                                                                                                                  | <b>See page 4/34</b> |

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 – Standard and Digital

#### Selection and Ordering data

Article No.

##### Accessories

SensGuard, 3/4" NPT (PPS)

Only available for CLS200 with 3/4" NPT thread

**7ML1830-1DL**

SensGuard, R 1" (BSPT) (PPS)

Only available for CLS200 with 3/4" NPT thread

**7ML1830-1DM**

One metallic cable gland M20 x 1.5, -40 ... +80 °C (-40 ... +176 °F) with integrated shield connection (available for PROFIBUS PA)

**7ML1930-1AQ**

##### General Purpose

1/2" NPT General Purpose Cable Entry IP68/IP69K NEMA6, -40 ... +100 °C (-40 ... +212 °F), cable size 6 ... 12 mm (0.236 ... 0.472 inch)

**7ML1830-1JA**

M20 x 1.5 General Purpose Cable Entry IP68/IP69K NEMA6, -40 ... +100 °C (-40 ... +212 °F), cable size 7 ... 12 mm (0.275 ... 0.472 inch)

**7ML1830-1JC**

##### Hazardous Locations

1/2" NPT EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1, Zone 2, Zone 21, Zone 22, and in Gas Groups IIA, IIB and IIC) -60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)

**7ML1830-1JB**

M20 EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC) -60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)

**7ML1830-1JD**

##### Blind threaded flanges are available.


Customers interested in a custom designed device should consult a local sales person. For more information, please visit

[http://www.automation.siemens.com/aspa\\_app](http://www.automation.siemens.com/aspa_app).

##### Pointek Specials

See page 4/62


#### Options

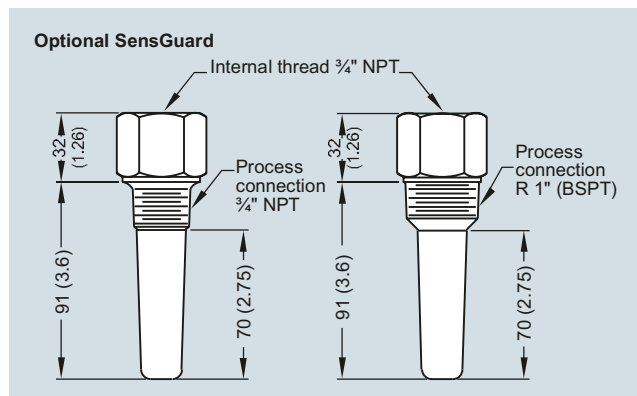

Optional SensGuard, dimensions in mm (inch)


## Characteristic curves

Pressure/temperature curve  
CLS200 sliding coupling  
threaded process connections  
(7ML5633 and 7ML5643)

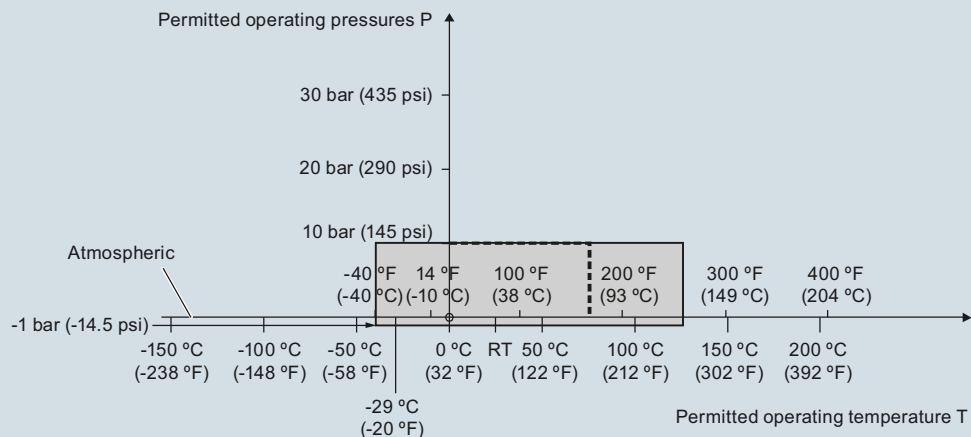

Pointek CLS200 process pressure/temperature derating curves (7ML5633 and 7ML5643)

Pressure/temperature curve  
CLS200 cable  
Threaded process connections  
(7ML5631 and 7ML5641)

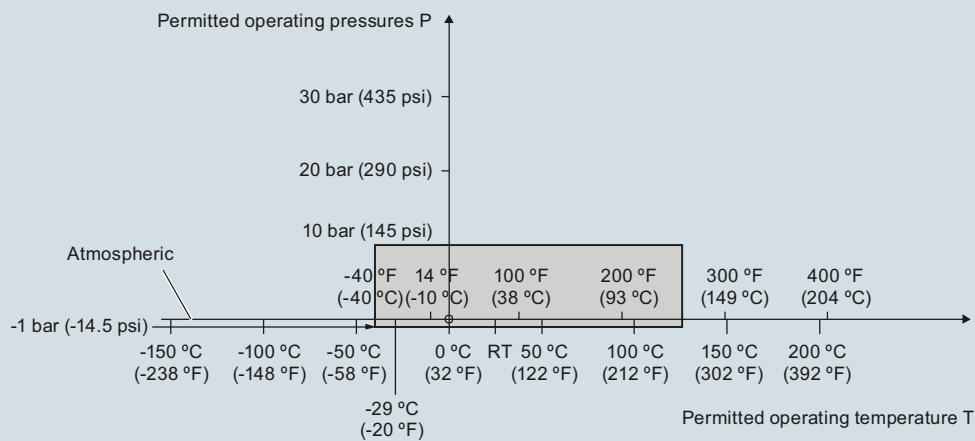


Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

## Level Measurement

Point level measurement - RF Capacitance switches


### Pointek CLS200 Standard and Digital

**Pressure/temperature curve**  
CLS200 compact and extended rod  
Threaded process connections  
(7ML5630 and 7ML5640)

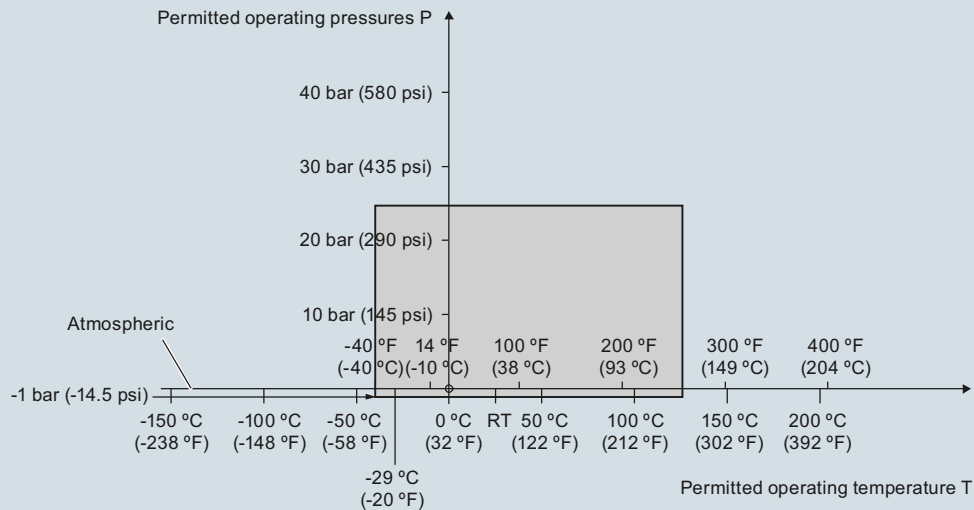


Pointek CLS200 process pressure/temperature derating curves (7ML5630 or 7ML5640)

**Pressure/temperature curve**  
CLS200 compact and extended sanitary type  
Sanitary process connections  
(7ML5632 and 7ML5642)

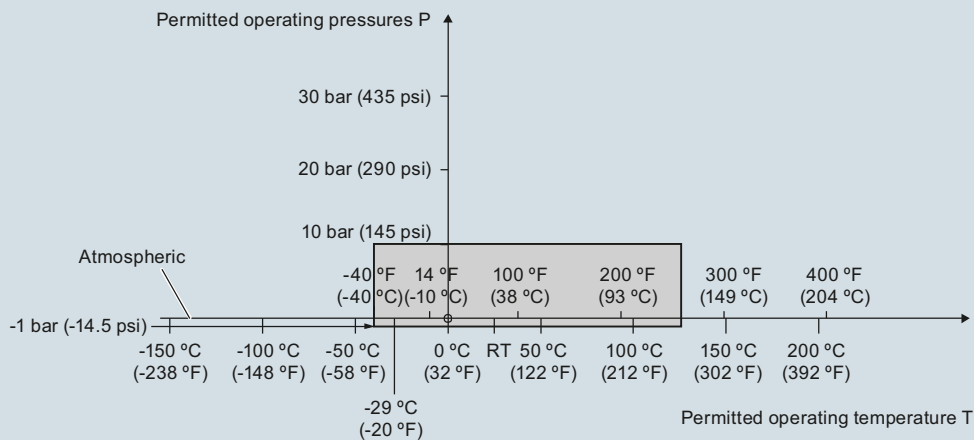

Pointek CLS200 process pressure/temperature derating curves (7ML5632 and 7ML5642)


**Pressure/temperature curve**  
**CLS200, cable**  
**ASME flanged process connections**  
**(7ML5631 and 7ML5641)**

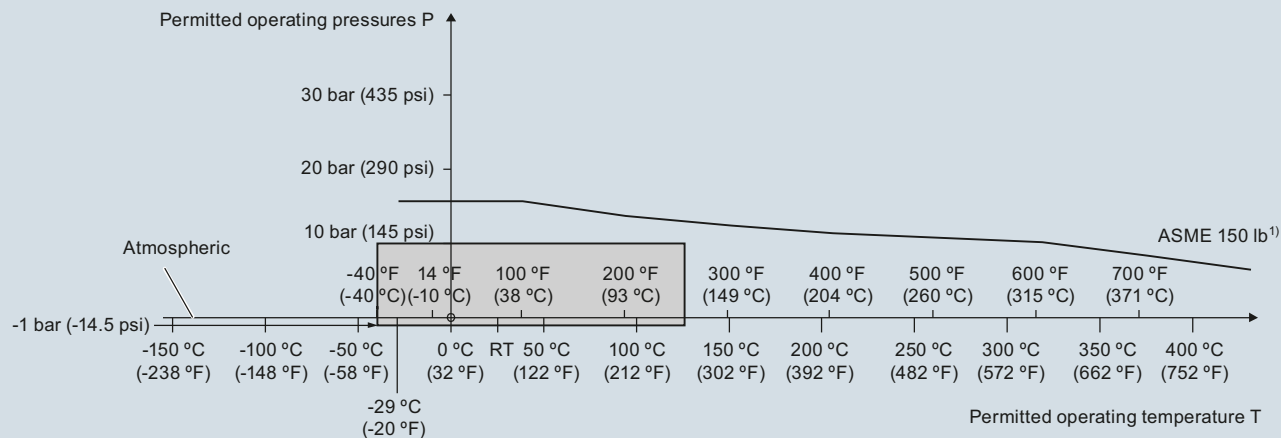

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

**Pressure/temperature curve**  
**CLS200 compact and extended rod**  
**ASME flanged process connections**  
**(7ML5630 and 7ML5640)**

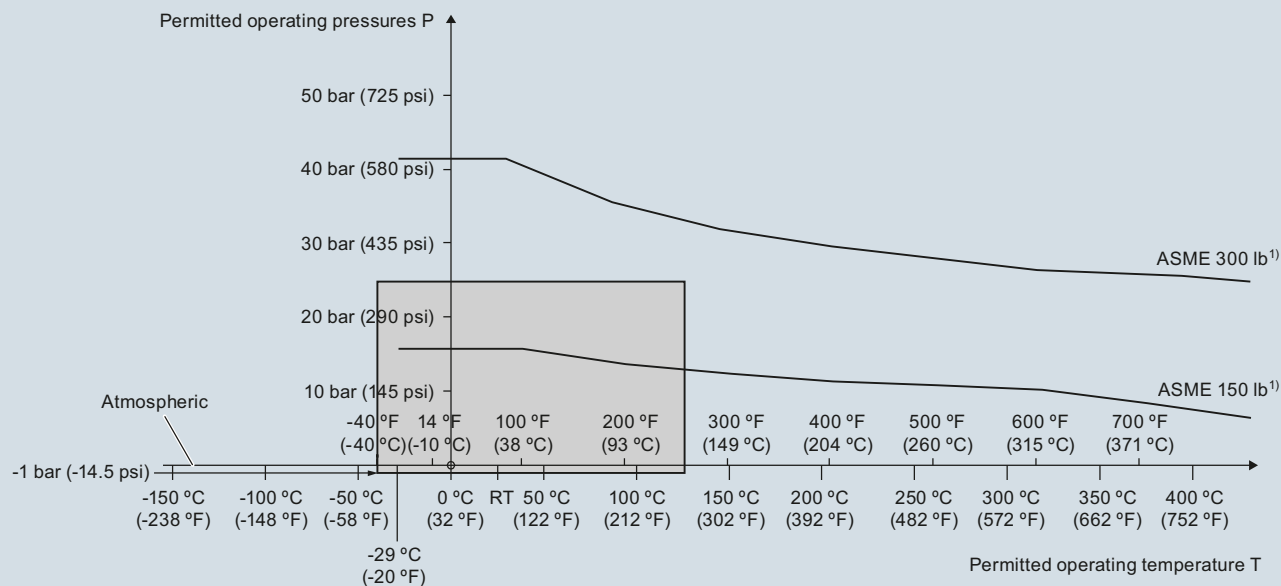

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

## Level Measurement

Point level measurement - RF Capacitance switches

### Pointek CLS200 Standard and Digital


**Pressure/temperature curve**  
**CLS200 cable**  
**EN flanged process connections**  
**(7ML5631 and 7ML5641)**

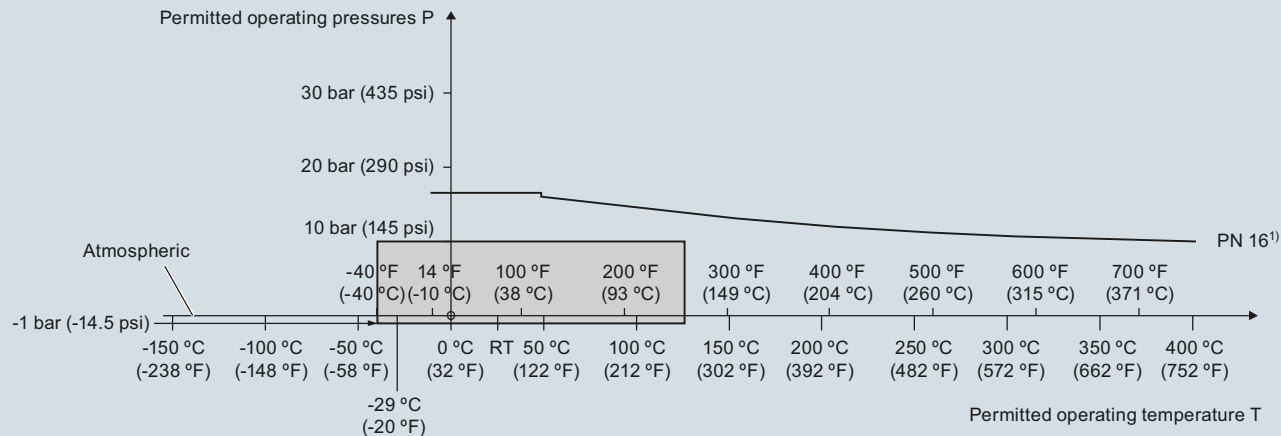

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

**Pressure/Temperature Curve**  
**CLS200 Compact and Extended Rod**  
**EN Flanged Process Connections**  
**(7ML5630 and 7ML5640)**

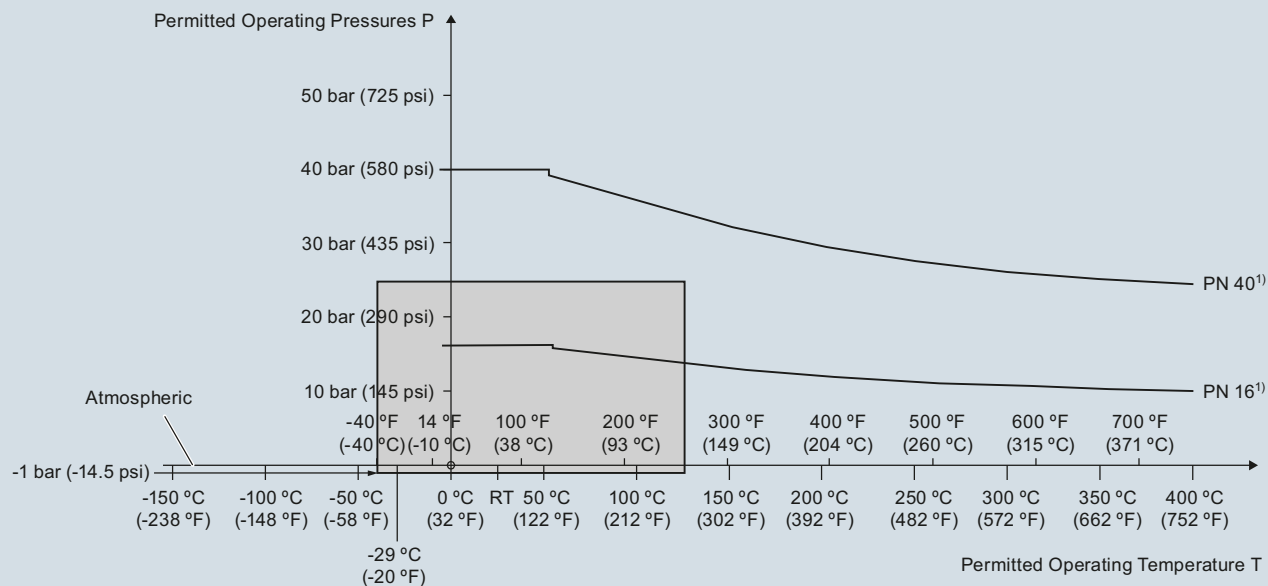








<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

**Level Measurement**

## Point level measurement - RF Capacitance switches

## Pointek CLS200 Standard and Digital

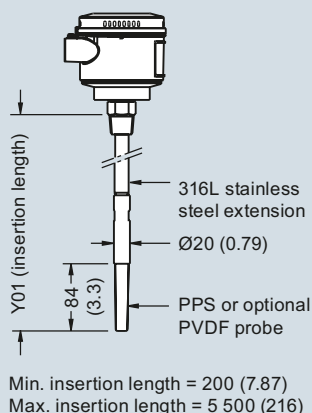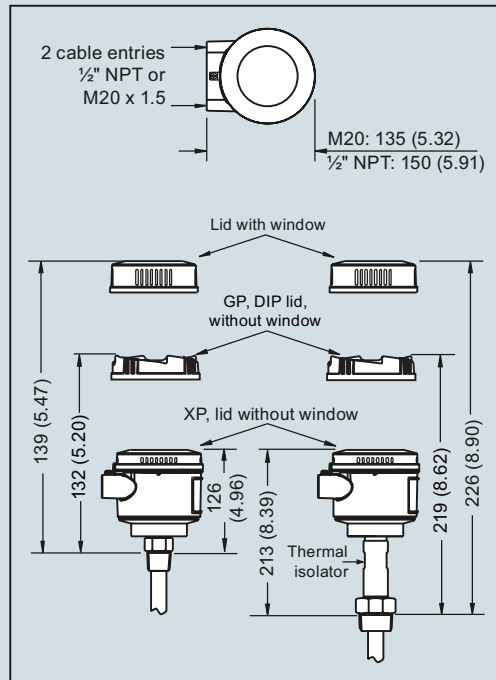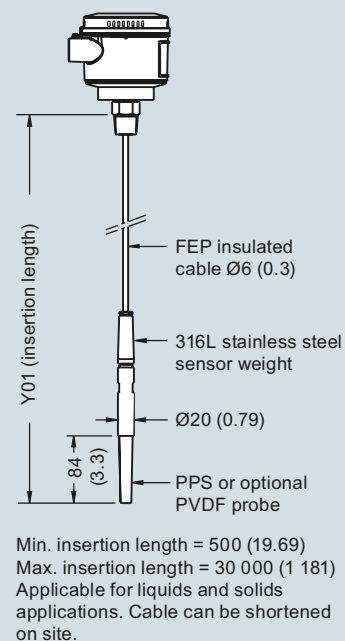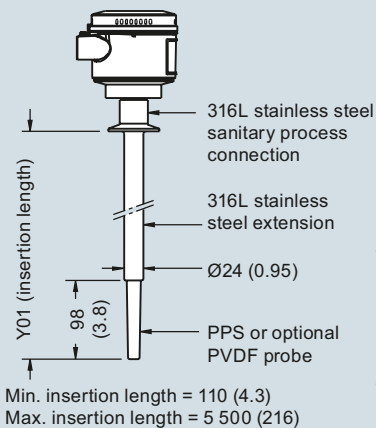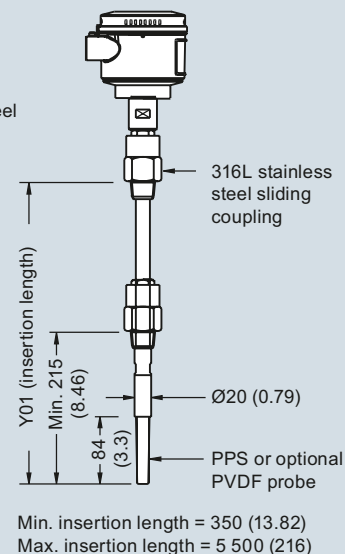**Dimensional drawings****Compact version  
Threaded  
(7ML5630 and 7ML5640)****Sanitary compact version  
Sanitary fitting  
(7ML5632 and 7ML5642)****Extended rod version  
Threaded  
(7ML5630 and 7ML5640)****Extended cable version  
Threaded  
(7ML5631 and 7ML5641)****Sanitary extended version  
Sanitary fitting  
(7ML5632 and 7ML5642)****Sliding coupling version  
Threaded  
(7ML5633 and 7ML5643)**


Pointek CLS200 threaded/sanitary process connections, dimensions in mm (inch)

## Level Measurement


Point level measurement - RF Capacitance switches

### Pointek CLS200 Standard and Digital


**Compact version**  
Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

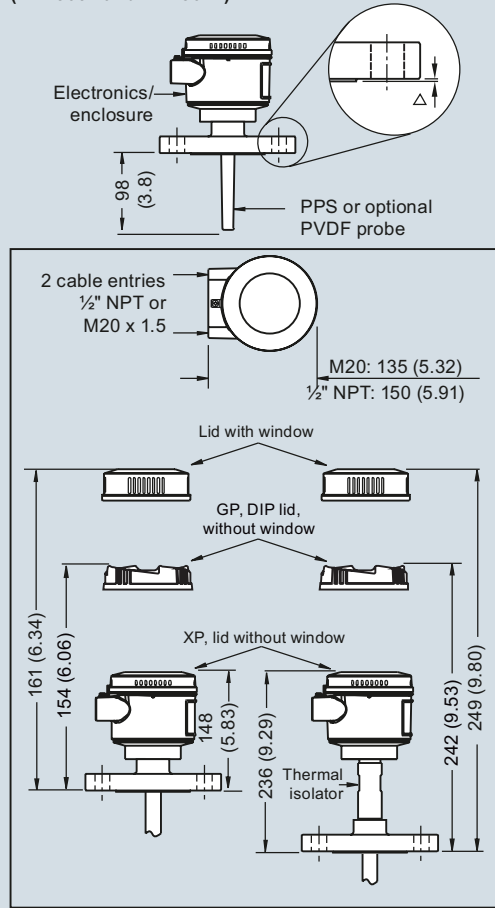

**Extended rod version**  
Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

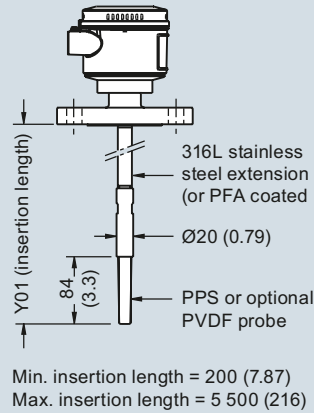

**Extended cable version**  
Welded Flange  
(7ML5631 and 7ML5641)

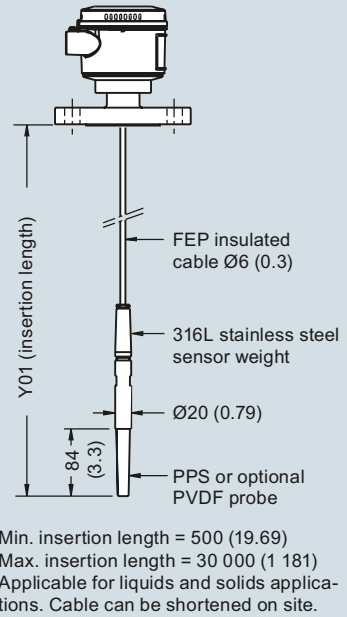


| Flange Facing (raised face) |                  |  |
|-----------------------------|------------------|--|
| Flange Class                | Facing thickness |  |
| △ ASME 150/300              | 2 (0.08)         |  |
| △ ASME 600/900              | 7 (0.28)         |  |
| △ PN16/40                   | 2 (0.08)         |  |

Insertion length does not include any raised face/gasket face dimension  
(see Flange Facing Table above)

Pointek CLS200 flanged process connections, dimensions in mm (inch)

## Schematics


**Wiring: Pointek CLS200 standard**

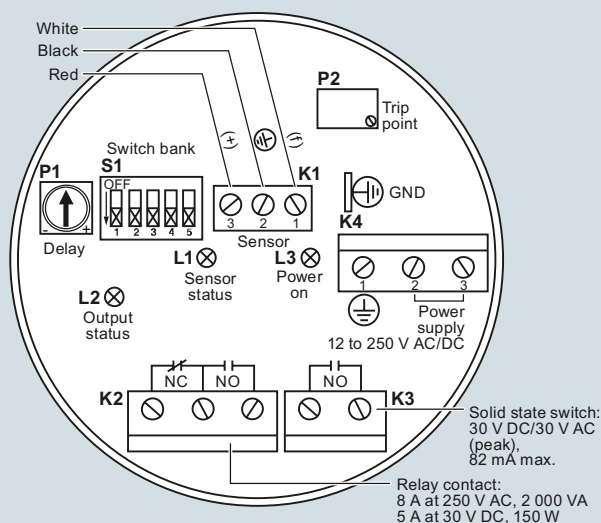

Notes:

- Identification label is on underside of lid. Switch and potentiometer settings are for illustration purposes only (refer to operation/setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction Manual or contact Siemens representative for detailed wiring information.

### Wiring: Pointek CLS200 Digital

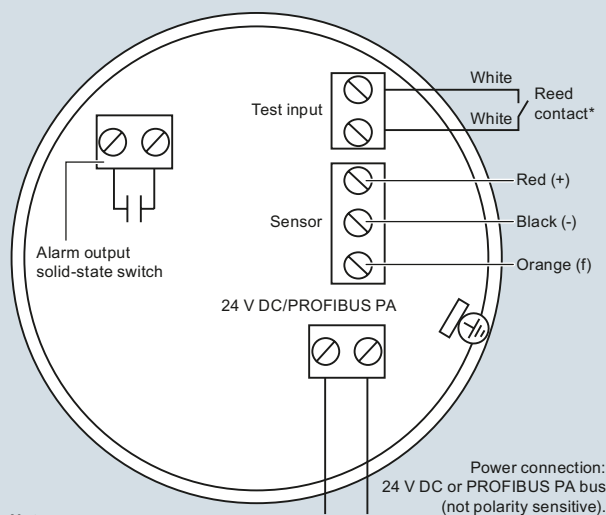

**Notes:**

Refer to the instruction manual or contact a Siemens representative for detailed wiring information.

**\*Magnet activated sensor Test**

**Magnet activated sensor test**  
A magnet can be used to test the sensor without opening the lid of the Pointek CLS200 Digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.

