

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

Overview



The SITRANS P Compact pressure transmitter is designed for the special requirements of the food, pharmaceutical and biotechnology industries.

The use of high-grade materials guarantees compliance with hygiene regulations.

Particular value has been placed on a high surface quality. The system can be electropolished in addition.

A further important feature is the hygiene-based design of the process connection by means of various aseptic connections.

The completely welded stainless steel housing can be designed up to degree of protection IP67.

Using appropriate thermal decouplers, the SITRANS P Compact pressure transmitter can be used for process temperatures up to 200 °C (392 °F).

Benefits

- Measuring ranges from 0 to 160 mbar (0 to 2.32 psi) to 0 to 40 bar (0 to 580 psi)
- Linearity error including hysteresis < +0.2 % of full-scale value
- Piezo-resistive measurement system, vacuum-proof and overload-proof
- Hygiene-based design according to EHEDG, FDA and GMP recommendations
- Material and surface quality according to hygiene requirements
- Wetted parts made of stainless steel; completely welded
- Signal output 4 to 20 mA (0 to 20 mA as option)
- Stainless steel housing with degree of protection IP65 (IP67 as option)
- Process temperature up to 200 °C (392 °F)
- Explosion protection II 2G Ex [ib] IIC T6 to ATEX
- Easy and safe to clean

Application

The SITRANS P Compact pressure transmitter is designed for the special requirements of the food, pharmaceutical and biotechnology industries.

The use of high-grade materials guarantees compliance with hygiene regulations.

The SITRANS P Compact pressure transmitter is available in many versions. Exact adaptation of the pressure transmitter to conditions at the place of use is thus possible

Design

The electronics is potted to protect it against moisture, corrosive atmospheres and vibration.

Notes on operating the pressure transmitter

Compensation of internal atmospheric pressure

Compensation of the internal atmospheric pressure of the SITRANS P Compact pressure transmitters is performed as follows:

- in the plug versions by means of the screwed gland (IP65)
- in the field housings by means of an integral sintered filter (IP65) or a vented cable (IP67)
- in versions with cable outlet by means of a vented cable (IP67)

In the absolute pressure range there is no need for compensation with respect to atmospheric pressure.

Note: These degrees of protection are only achieved under the following conditions:

- if the pressure transmitter is installed correctly
- if the screwed glands are securely tightened
- if the cable diameters agree with the nominal diameters of the gaskets in the housing

Note: The integral EMC measures are only effective if the earth connection is made correctly.

CE marking

The CE marking of the pressure transmitter certifies compliance with the guidelines of the European Council (9/336/EC), the EMC law (13.11.1992), as well as the applicable generic standards.

Interference-free operation in systems and plants is achieved only if the specifications for shielding, earthing, cable routing and electrical isolation are observed during installation and assembly.

Hazardous areas

Note: Electrical equipment in hazardous areas must only be installed and operated by trained personnel.

Modifications to units and connections result in cancellation of the explosion protection and guarantee.

With intrinsically-safe circuits, make sure that equipotential bonding exists throughout the complete cabling inside and outside of the hazardous area. The limits specified in the ATEX approval must be observed.

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

1

Function

The process pressure acts on a piezo-resistive semiconductor measuring bridge through a remote seal and a transmission liquid. The pressure transmitter converts the pressure values into a load-independent current.

A compensation network makes the output signal largely independent of the ambient temperature. As a result of a specially adapted remote seal connection with minimized volume, the influence of the process temperature on the output signal is greatly reduced compared to a conventional screw connection.

The pressure transmitters can be powered with a non-regulated DC voltage of 10 to 30 V. Output signals common to measuring technology are available.

Technical specifications

Pressure transmitters for food, pharmaceuticals and biotechnology

Mode of operation

Measuring principle piezo-resistive

Input

Measured variable gauge or absolute pressure
 Measuring range 0 ... 160 mbar (0 ... 2.32 psi)
 ...
 0 ... 40 bar (0 ... 580 psi)

Output

Output signal
 • 2-wire system 4 ... 20 mA
 • Three-wire system 0 ... 20 mA

Measuring accuracy

Acc. to IEC 60770-1
 Error in measurement at limit setting incl. hysteresis and reproducibility $\leq 0.2\%$ of full-scale value
 Adjustment accuracy $\leq \pm 0.2\%$ of full-scale value
 Step response time < 20 ms
Influence of ambient temperature
 On the enclosure
 • Zero point $< 0.2\%$ /10 K of full-scale value
 • Measuring span $< 0.2\%$ /10 K of full-scale value
 On the process connection (remote seals)
 • Flange remote seal
 - DN 25 / 1" 4.8 mbar/10 K (0.069 psi/10 K)
 - DN 32 / 1¼" 2.3 mbar/10 K (0.033 psi/10 K)
 - DN 40 / 1½" 1.6 mbar/10 K (0.023 psi/10 K)
 - DN 50 / 2" 0.6 mbar/10 K (0.009 psi/10 K)
 • Clamp-on seal
 - DN 25 / 1" 9.5 mbar/10 K (0.14 psi/10 K)
 - DN 32 / 1¼" 4.1 mbar/10 K (0.06 psi/10 K)
 - DN 40 / 1½" 3.9 mbar/10 K (0.05 psi/10 K)
 - DN 50 / 2" 3.9 mbar/10 K (0.05 psi/10 K)

The zero error specified for the process connection should be considered as a guideline for a standard design. We will produce a detailed system calculation on request. Systems with reduced remote seal errors are available on request.

Rated conditions

Installation conditions
 • Mounting position Any, vertical as standard
 Ambient conditions
 • Ambient temperature -10 ... +70 °C (14 ... 158 °F)
 • Storage temperature -10 ... +90 °C (14 ... 194 °F)
 • Process temperature Max. 200 °C (392 °F), depending on design
 • Degree of protection (to EN 60529) IP65, optional IP67
 • Electromagnetic Compatibility
 - Emitted interference To EN 50081 Part 1, issue 1993 (residential and industrial areas). The unit has no own emissions.
 - Noise immunity to EN 50082 Part 2, issue March 1995 (industrial areas)

Design

Weight (without remote seal)
 • Field enclosure ≈ 460 G (≈ 1.01 lb)
 • Enclosure with plug ≈ 200 g (≈ 0.44 lb)
 Enclosure
 • Designs
 • Field housing IP65 or IP67, with screwed gland
 • Angled plug DIN 43650, IP65
 • Cable connection, IP67
 • Round plug connector M12, IP65
 • Material Stainless steel, mat. no. 1.4404/316L/1.4305
 Material of union nut Polyamide (with electrical connection using plug or cable)
 Electronics unit potted with silicone
 Internal ventilation for measuring ranges < 16 bar (< 232 psi), through housing thread or connection cable depending on design
 Process connection
 • Versions See ordering data
 • Material of coupling Stainless steel, mat. no. 1.4404/316L

Power supply

Terminal voltage on transmitter 10 ... 30 V DC
 Rated voltage 24 V DC

Certificates and approvals

Classification according to pressure equipment directive (PED 97/23/EC)
 For gases of fluid group 1 and liquids of fluid group 1; complies with the requirements of article 3, paragraph 1 (appendix 1); assigned to category III, conformity evaluation module H by the TÜV Nord
 Explosion protection
 • Intrinsic safety "i"
 - Marking TÜV 03 ATEX 2099 X
 Ex II 2G Ex ib IIC T6

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

1

Selection and Ordering data

Article No. Ord. code

SITRANS P Compact pressure transmitters for pressure and absolute pressure with diaphragm flush at front

7MF8010 -

2-wire system
Process temperature up to 140 °C (284 °F)
Accuracy: 0.2 % of full-scale value
Output 4 ... 20 mA

1

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Diaphragm seal with quick-release clamp

Milk pipe union to DIN 11851 with slotted union nut

- DN 25
- DN 32
- DN 40
- DN 50
- DN 65

AD
AE
AF
AG
AH

Milk pipe union to DIN 11851 with threaded socket

- DN 25
- DN 32
- DN 40
- DN 50
- DN 65

BD
BE
BF
BG
BH

Clamp connection to DIN 32676

- DN 25
- DN 40
- DN 50

CD
CF
CG

Clamp connection to ISO 2852

- 1 inch
- 1½ inch
- 2 inch
- 2½ inch

DM
DN
DP
DQ

IDF standard with slotted union nut

- 1 inch
- 1½ inch
- 2 inch

EM
EN
EP

IDF standard with threaded socket

- 1 inch
- 1½ inch
- 2 inch

FM
FN
FP

SMS standard with slotted union nut

- 1 inch
- 1½ inch
- 2 inch

GM
GN
GP

SMS standard with threaded socket

- 1 inch
- 1½ inch
- 2 inch

HM
HN
HP

DRD flange, without welding-type flange

- DN 50, PN 40

JH

Varivent connection (Tuchenhausen)

- D = 50, for Varivent housing DN 25 and 1 inch

KF

- D = 68, for Varivent housing DN 40 ... DN 125 and 1½ ... 6 inch

KL

Special version
(add Order code and plain text)

ZA J 1 Y

Filling liquid

Food oil, FDA-listed

3

Medicinal white oil

2

Special version

9

(add Order code and plain text)

L 1 Y

Output signal

4 ... 20 mA

1

Special version

9

(add Order code and plain text)

M 1 Y

Selection and Ordering data

Article No. Ord. code

SITRANS P Compact pressure transmitters for pressure and absolute pressure with diaphragm flush at front

7MF8010 -

2-wire system
Process temperature up to 140 °C (284 °F)
Accuracy: 0.2 % of full-scale value
Output 4 ... 20 mA

1

Diaphragm seal with aseptic connection

Aseptic screwed gland to DIN 11864-1, form A, with slotted union nut

- 1 inch
- 1½ inch
- 2 inch
- 2½ inch

PM
PN
PP
PQ

Aseptic screwed gland to DIN 11864-1, form A with threaded socket

- 1 inch
- 1½ inch
- 2 inch
- 2½ inch

QM
QN
QP
QQ

Aseptic screwed NEUMO with slotted union nut¹⁾

- DN 25
- DN 32
- DN 40
- DN 50

RD
RE
RF
RG

Aseptic screwed NEUMO with threaded socket¹⁾

- DN 25
- DN 32
- DN 40
- DN 50

SD
SE
SF
SG

Aseptic screwed NEUMO with clamp connection, form R¹⁾

- DN 25
- DN 32
- DN 40
- DN 50

TD
TE
TF
TG

Aseptic screwed NEUMO with clamp connection, form V¹⁾

- DN 25
- DN 32
- DN 40
- DN 50

UD
UE
UF
UG

Male thread DIN 3852 Form A

- G½", min. meas. span 1.6 bar (23.2 psi)
- G¾", min. meas. span 1 bar (14.5 psi)
- G1", min. meas. span 0.4 bar (5.8 psi)
- G1½", min. meas. span 0.25 bar (3.63 psi)
- G2", min. meas. span 0.16 bar (2.32 psi)

XA
XB
XC
XD
XE

Special version
(add Order code and plain text)

ZA J 1 Y

Filling liquid

Food oil, FDA-listed

3

Medicinal white oil

2

Special version

9

(add Order code and plain text)

L 1 Y

Output signal

4 ... 20 mA

1

Special version

9

(add Order code and plain text)

M 1 Y

¹⁾ Please specify as well:
Connections for pipes: R01, R02 or R03, see table "Further designs" on next page

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

1

Selection and Ordering data		Article No.	Ord. code	Selection and Ordering data		Article No.	Ord. code
SITRANS P Compact pressure transmitters for pressure and absolute pressure with diaphragm flush at front		7MF8010-		SITRANS P Compact pressure transmitters for pressure and absolute pressure with diaphragm flush at front		7MF8010-	
2-wire system Process temperature up to 140 °C (284 °F) Accuracy: 0.2 % of full-scale value Output 4 ... 20 mA		1		2-wire system Process temperature up to 140 °C (284 °F) Accuracy: 0.2 % of full-scale value Output 4 ... 20 mA		1	
Housing design (stainless steel mat. No. 1.4404/316L) / electr. connection				Measured range			
Housing with angled plug to DIN 43650, IP65		1		Overload pressure			
Housing with round plug M12, IP65, union nut made of polyamide		2		(continued)			
Housing with round plug M12, IP65, union nut made of stainless steel		3		-1 ... +9 bar (-14.5 ... +130.5 psi)		GA	
Stainless steel field housing (small) with cable gland, IP65		4		-1 ... +15 bar (-14.5 ... +217.6 psi)		GB	
Stainless steel field housing (small) with cable gland, IP67		5		0 ... 1 bar a (0 ... 14.5 psia)		HA	
Internal ventilation for measuring ranges < 10 bar (< 145 psi)				0 ... 1.6 bar a (0 ... 23.2 psia)		HB	
Measured range				0 ... 2.5 bar a (0 ... 36.3 psia)		HC	
Overload pressure				0 ... 4 bar a (0 ... 58 psia)		HD	
0 ... 160 mbar (0 ... 2.32 psi)			BB	0 ... 6 bar a (0 ... 87 psia)		HE	
0 ... 250 mbar (0 ... 3.63 psi)			BC	0 ... 10 bar a (0 ... 145 psia)		JA	
0 ... 400 mbar (0 ... 5.8 psi)			BD	Special version (add Order code and plain text)		ZA	P 1 Y
0 ... 600 mbar (0 ... 8.7 psi)			BE	Explosion protection			
0 ... 1 bar (0 ... 14.5 psi)			CA	without			1
0 ... 1.6 bar (0 ... 23.2 psi)			CB	with, to ATEX 100a, II 2 G, Ex ib IIC T6			2
0 ... 2.5 bar (0 ... 36.3 psi)			CC	Further designs		Order code	
0 ... 4 bar (0 ... 58 psi)			CD	Please add "-Z" to Article No. and specify Order code			
0 ... 6 bar (0 ... 87 psi)			CE	Hygiene version		P01	
0 ... 10 bar (0 ... 145 psi)			DA	Roughness of process connection: Foil $R_a < 0.8 \mu\text{m}$ ($3.15 \cdot 10^{-8}$ inch); Welded seams $R_a < 1.5 \mu\text{m}$ ($5.9 \cdot 10^{-8}$ inch)			
0 ... 16 bar (0 ... 232 psi)			DB	Integral cooling element		K01	
0 ... 25 bar (0 ... 363 psi)			DC	Process temperature max. 200 °C (392 °F) instead of 140 °C (284 °F)			
0 ... 40 bar (0 ... 580 psi)			DD	Connections for pipe			
-160 ... 0 mbar (-2.32 ... 0 psi)			EB	Pipes to DIN 11850		R01	
-250 ... 0 bar (-3.73 ... 0 psi)			EC	ISO pipes to DIN 2463		R02	
-400 ... 0 bar (-5.8 ... 0 psi)			ED	Pipes to O. D. Tubing "BS 4825 Part 1"		R03	
-600 ... 0 bar (-8.7 ... 0 psi)			EE	Certificates			
-1 ... 0 bar (-14.5 ... 0 psi)			FA	Quality inspection certificate (Factory calibration) to IEC 60770-2		C11	
-1 ... 0.6 bar (-14.5 ... 8.7 psi)			FB	Inspection certificate to EN 10204-3.1 Use of FDA-listed remote seal filling liquids certified by test report to EN 10204-2.2		C12 C17	
-1 ... 1.5 bar (-14.5 ... 21.8 psi)			FC	Roughness depth measurement R_a certified by test report to EN 10204-3.1		C18	
-1 ... 3 bar (-14.5 ... 43.5 psi)			FD	Certification to EHEDG for clamp-on seals with aseptic screwed gland to DIN 11864		C19	
-1 ... 5 bar (-14.5 ... 72.5 psi)			FE				

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

1

Selection and Ordering data

Article No. Ord. code

SITRANS P Compact pressure transmitters for pressure and absolute pressure with clamp-on remote seal

7MF8010 -

2-wire system

Process temperature up to 140 °C (284 °F)

Accuracy: 0.2 % of full-scale value

Output 4 ... 20 mA

2

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Clamp-on remote seal (screwed gland at both ends) with quick-release clamps

Milk pipe union to DIN 11851 with threaded socket

- DN 25
- DN 32
- DN 40
- DN 50
- DN 65

AD
AE
AF
AG
AH

Clamp connection to DIN 32676

- DN 25
- DN 32
- DN 40
- DN 50
- DN 65

CD
CE
CF
CG
CHClamp connection to ISO 2852¹⁾

- 1 inch
- 1½ inch
- 2 inch
- 2½ inch

DM
DN
DP
DQ

Special version

(add Order code and plain text)

ZA

J 1 Y

Filling liquid

Food oil, FDA-listed

Medicinal white oil

Special version

(add Order code and plain text)

3

2

9

L 1 Y

Output signal

4 ... 20 mA

Special version

(add Order code and plain text)

1

9

M 1 Y

¹⁾ Please note the internal diameter of the pipe. Please specify pipe classes (see "Further designs")

Selection and Ordering data

Article No. Ord. code

SITRANS P Compact pressure transmitters for pressure and absolute pressure with clamp-on remote seal

7MF8010 -

2-wire system

Process temperature up to 140 °C (284 °F)

Accuracy: 0.2 % of full-scale value

Output 4 ... 20 mA

2

Clamp-on seal with aseptic connection

Aseptic screwed gland to DIN 11864-1, form A with threaded socket

- 1 inch
- 1½ inch
- 2 inch

QM
QN
QPAseptic screwed NEUMO with threaded socket¹⁾

- DN 25
- DN 32
- DN 40
- DN 50
- DN 65

SD
SE
SF
SG
SHAseptic screwed NEUMO with clamp connection, form R¹⁾

- DN 25
- DN 32
- DN 40
- DN 50

TD
TE
TF
TG

Aseptic screwed gland SÜDMO with threaded socket W 501

- 1 inch
- 1½ inch
- 2 inch

VM
VN
VP

Aseptic screwed gland SÜDMO with clamp connection W 601

- 1 inch
- 1½ inch
- 2 inch

WM
WN
WP

Special version

(add Order code and plain text)

ZA

J 1 Y

Filling liquid

Food oil, FDA-listed

Medicinal white oil

Special version

(add Order code and plain text)

3

2

9

L 1 Y

Output signal

4 ... 20 mA

Special version

(add Order code and plain text)

1

9

M 1 Y

¹⁾ Please specify as well:
Connections for pipes: R01, R02 or R03, see table "Further designs" on next page

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

1


Selection and Ordering data		Article No.	Ord. code	Selection and Ordering data		Article No.	Ord. code
SITRANS P Compact pressure transmitters for pressure and absolute pressure with clamp-on remote seal		7 MF 8 0 1 0 -		SITRANS P Compact pressure transmitters for pressure and absolute pressure with clamp-on remote seal		7 MF 8 0 1 0 -	
2-wire system Process temperature up to 140 °C (284 °F) Accuracy: 0.2 % of full-scale value Output 4 ... 20 mA		2		2-wire system Process temperature up to 140 °C (284 °F) Accuracy: 0.2 % of full-scale value Output 4 ... 20 mA		2	
Housing design (stainless steel mat. No. 1.4404/316L) / electr. connection				Measured range Overload pressure (continued)			
Housing with angled plug to DIN 43650, IP65, union nut made of polyamide			1	-1 ... 9 bar (-14.5 ... 130.5 psi)			GA
Housing with round plug M12, IP65, union nut made of polyamide			2	-1 ... 15 bar (-14.5 ... 217.6 psi)			GB
Housing with round plug M12, IP65, union nut made of stainless steel			3	0 ... 1 bar a (0 ... 14.5 psia)			HA
Stainless steel field housing (small) with cable gland, IP65			4	0 ... 1.6 bar a (0 ... 23.2 psia)			HB
Stainless steel field housing (small) with cable gland, IP67 Internal ventilation for measuring ranges < 10 bar (< 145 psi)			5	0 ... 2.5 bar a (0 ... 36.3 psia)			HC
Measured range Overload pressure				0 ... 4 bar a (0 ... 58 psia)			HD
0 ... 160 mbar (0 ... 2.32 psi)	2 bar (29 psi)		BB	0 ... 6 bar a (0 ... 87 psia)			HE
0 ... 250 mbar (0 ... 3.63 psi)	2 bar (29 psi)		BC	0 ... 10 bar a (0 ... 145 psia)			JA
0 ... 400 mbar (0 ... 5.8 psi)	6 bar (87 psi)		BD	Special version (add Order code and plain text)			ZA
0 ... 600 mbar (0 ... 8.7 psi)	6 bar (87 psi)		BE	Explosion protection			P 1 Y
0 ... 1 bar (0 ... 14.5 psi)	10 bar (145 psi)		CA	without			1
0 ... 1.6 bar (0 ... 23.2 psi)	10 bar (145 psi)		CB	with, to ATEX 100a, II 2 G, Ex ib IIC T6			2
0 ... 2.5 bar (0 ... 36.3 psi)	16 bar (232 psi)		CC	Further designs			Order code
0 ... 4 bar (0 ... 58 psi)	16 bar (232 psi)		CD	Please add "-Z" to Article No. and specify Order code			
0 ... 6 bar (0 ... 87 psi)	30 bar (435 psi)		CE	Hygiene version			P01
0 ... 10 bar (0 ... 145 psi)	30 bar (435 psi)		DA	Roughness of process connection: Foil $R_a < 0.8 \mu\text{m}$ ($3.15 \cdot 10^{-8}$ inch); Welded seams $R_a < 1.5 \mu\text{m}$ ($5.9 \cdot 10^{-8}$ inch)			
0 ... 16 bar (0 ... 232 psi)	50 bar (725 psi)		DB	Integral cooling element			K01
0 ... 25 bar (0 ... 363 psi)	50 bar (725 psi)		DC	Process temperature max. 200 °C (392 °F) instead of 140 °C (284 °F)			
0 ... 40 bar (0 ... 580 psi)	70 bar (1015 psi)		DD	Connections for pipe			R01
-160 ... 0 mbar (-2.32 ... 0 psi)	2 bar (29 psi)		EB	Pipes to DIN 11850			R02
-250 ... 0 bar (-3.73 ... 0 psi)	2 bar (29 psi)		EC	ISO pipes to ISO 2463			R03
-400 ... 0 bar (-5.8 ... 0 psi)	6 bar (87 psi)		ED	Pipes to O. D. Tubing "BS 4825 Part 1"			
-600 ... 0 bar (-8.7 ... 0 psi)	6 bar (87 psi)		EE	Certificates			C11
-1 ... 0 bar (-14.5 ... 0 psi)	10 bar (145 psi)		FA	Quality inspection certificate (Five-step factory calibration) to IEC 60770-2			
-1 ... 0.6 bar (-14.5 ... 8.7 psi)	10 bar (145 psi)		FB	Inspection certificate to EN 10204-3.1 Use of FDA-listed remote seal filling liquids certified by test report to EN 10204-2.2			C12 C17
-1 ... 1.5 bar (-14.5 ... 21.8 psi)	16 bar (232 psi)		FC	Roughness depth measurement R_a certified by test report to EN 10204-3.1			C18
-1 ... 3 bar (-14.5 ... 43.5 psi)	16 bar (232 psi)		FD	Certification to EHEDG for clamp-on seals with aseptic screwed gland to DIN 11864			C19
-1 ... 5 bar (-14.5 ... 72.5 psi)	30 bar (435 psi)		FE				

Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

Dimensional drawings

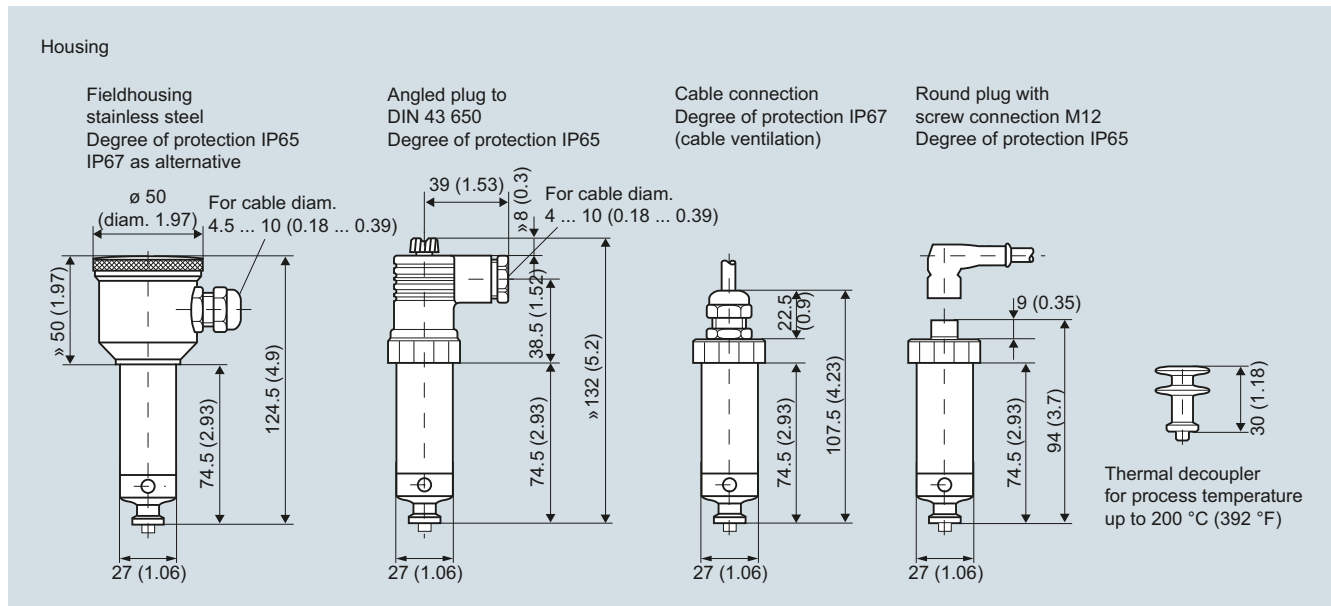


SITRANS P Compact, dimensions in mm (inch)

Process connections


Diaphragm seal with quick-release clamp

Milk pipe union to DIN 11851 with slotted union nut




DN	PN	H mm (inch)	G
25	40	24 (0.95)	Rd. 52 x 1/6"
32	40	24 (0.95)	Rd. 58 x 1/6"
40	40	24 (0.95)	Rd. 65 x 1/6"
50	25	25.1 (0.99)	Rd. 78 x 1/6"
65	25	28.6 (1.13)	Rd. 95 x 1/6"

Milk pipe union to DIN 11851 with threaded socket




DN	PN	H mm (inch)	G
25	40	-	Rd. 52 x 1/6"
32	40	20 (0.79)	Rd. 58 x 1/6"
40	40	20 (0.79)	Rd. 65 x 1/6"
50	25	20 (0.79)	Rd. 78 x 1/6"
65	25	22 (0.87)	Rd. 95 x 1/6"

Clamp connection to DIN 32676




DN	PN	H mm (inch)	D mm (inch)
25	16	14 (0.55)	50.5 (2)
40	16	14 (0.55)	50.5 (2)
50	16	14 (0.55)	64 (2.52)

Clamp connection to ISO 2852




DN	PN	H mm (inch)	D mm (inch)
1"	16	14 (0.55)	50.5 (2)
1½"	16	12 (0.47)	50.5 (2)
2"	16	14 (0.55)	64 (2.52)
2½"	16	14 (0.55)	77.5 (3.05)

IDF standard with slotted union nut




DN	PN	H mm (inch)	G inch (IDF thread)
1"	40	21 (0.83)	1"
1½"	40	13.5 (0.53)	1½"
2"	25	15 (0.59)	2"

IDF standard with threaded socket




DN	PN	H mm (inch)	G inch (IDF thread)
1"	40	21 (0.83)	1"
1½"	40	13.5 (0.53)	1½"
2"	25	15 (0.59)	2"

SMS standard with slotted union nut




DN	PN	H mm (inch)	G
1"	40	16 (0.63)	Rd 40 x 1.6"
1½"	40	16 (0.63)	Rd 60 x 1.6"
2"	25	16 (0.63)	Rd 70 x 1.6"

SMS standard with threaded socket



DN	PN	H mm (inch)	G
1"	40	16 (0.63)	Rd 40 x 1.6"
1½"	40	20 (0.79)	Rd 60 x 1.6"
2"	25	20 (0.79)	Rd 70 x 1.6"

DRD flange, without welding-type flange



DN	PN	H mm (inch)	D mm (inch)
50	40	16.7 (0.66)	65.5 (2.58)


Pressure Measurement

Transmitters for basic requirements

SITRANS P Compact for gauge and absolute pressure

1


Varivent connection



DN	PN	H mm (inch)	D mm (inch)
25	25	19 (0.75)	50 (1.97)
40 ... 125	25/10	19 (0.75)	68 (2.68)


Diaphragm seal with aseptic connection

Aseptic screwed gland to DIN 11864-1, form A, with slotted union nut




DN	PN	H mm (inch)	G
1"	40	20 (0.79)	Rd 52 x 1/6"
1½"	40	20 (0.79)	Rd 58 x 1/6"
2"	25	20 (0.79)	Rd 65 x 1/6"
2½"	25	20 (0.79)	Rd 78 x 1/6"

Aseptic screwed gland to DIN 11864-1, form A, with threaded socket




DN	PN	H mm (inch)	G
1"	40	15 (0.59)	Rd 52 x 1/6"
1½"	40	15 (0.59)	Rd 58 x 1/6"
2"	25	15 (0.59)	Rd 65 x 1/6"
2½"	25	15 (0.59)	Rd 78 x 1/6"

Aseptic screwed NEUMO BioConnect with slotted union nut




DN	PN	H mm (inch)	G
25	16	15 (0.59)	M 42 x 2
32	16	15 (0.59)	M 52 x 2
40	16	15 (0.59)	M 56 x 2
50	16	15 (0.59)	M 68 x 2

Aseptic screwed NEUMO BioConnect with threaded socket




DN	PN	H mm (inch)	G
25	16	20 (0.79)	M 42 x 2
32	16	20 (0.79)	M 52 x 2
40	16	20 (0.79)	M 56 x 2
50	16	20 (0.79)	M 68 x 2

Aseptic screwed NEUMO BioConnect with clamp connection, form R




DN	PN	H mm (inch)	D mm (inch)
25	40	20 (0.79)	50.5 (2)
32	40	20 (0.79)	50.5 (2)
40	40	20 (0.79)	64 (2.52)
50	25	20 (0.79)	77.4 (3.05)

Aseptic screwed NEUMO BioConnect with clamp connection, form V



DN	PN	H mm (inch)	D mm (inch)
25	40	15 (0.59)	50.5 (2)
32	40	15 (0.59)	50.5 (2)
40	40	15 (0.59)	64 (2.52)
50	25	15 (0.59)	77.4 (3.05)


Male thread DIN 3852, form A



G	d mm (inch)	d _M mm (inch)	h ₁ mm (inch)	h ₂ mm (inch)	SW mm (inch)
G½A	26 (1.02)	17.5 (0.69)	27 (1.06)	14 (0.55)	27 (1.06)
G¾A	32 (1.26)	22.6 (0.89)	31 (1.22)	16 (0.63)	32 (1.26)
G1A	39 (1.54)	27 (1.06)	33 (1.30)	18 (0.71)	51 (2.01)
G1½A	55 (2.17)	40 (1.57)	40 (1.57)	22 (0.87)	55 (2.17)
G2A	68 (2.68)	51 (2.00)	42 (1.65)	24 (0.94)	70 (2.76)


Clamp-on remote seal (screwed gland at both ends) with quick-release clamps

Milk pipe union to DIN 11851 with threaded socket




DN	PN	L mm (inch)	G
25	40	110 (4.33)	Rd 52 x 1/6"
32	40	110 (4.33)	Rd 58 x 1/6"
40	40	110 (4.33)	Rd 65 x 1/6"
50	25	110 (4.33)	Rd 78 x 1/6"
65	25	110 (4.33)	Rd 95 x 1/6"

Clamp connection to DIN 32676



DN	PN	L mm (inch)	D mm (inch)
25	16	110 (4.33)	50.5 (2)
32	16	110 (4.33)	50.5 (2)
40	16	110 (4.33)	50.5 (2)
50	16	110 (4.33)	64 (2.52)
65	10	110 (4.33)	91 (3.58)


Clamp connection to ISO 2852



DN	PN	L mm (inch)	D mm (inch)
1"	16	110 (4.33)	50.5 (2)
1½"	16	110 (4.33)	50.5 (2)
2"	16	110 (4.33)	64 (2.52)
2½"	16	110 (4.33)	91 (3.58)


Clamp-on seal with aseptic connection

Aseptic screwed gland to DIN 11864-1, form A, with threaded socket



DN	PN	L mm (inch)	G
1"	40	110 (4.33)	Rd 52 x 1/6"
1½"	40	110 (4.33)	Rd 65 x 1/6"
2"	25	110 (4.33)	Rd 78 x 1/6"

Aseptic screwed NEUMO BioConnect with threaded socket




DN	PN	L mm (inch)	G
25	16	110 (4.33)	M 42 x 2
32	16	110 (4.33)	M 52 x 2
40	16	110 (4.33)	M 56 x 2
50	16	110 (4.33)	M 68 x 2
65	16	110 (4.33)	M 90 x 3

Pressure Measurement

Transmitters for basic requirements


SITRANS P Compact for gauge and absolute pressure

Aseptic screwed NEUMO BioConnect with clamp connection, form R




DN	PN	L mm (inch)	D mm (inch)
25	16	110 (4.33)	50.4 (2)
32	16	110 (4.33)	50.4 (2)
40	16	110 (4.33)	64 (2.52)
50	16	110 (4.33)	77.4 (3.05)

Aseptic screwed gland SÜDMO with threaded socket W 501




DN	PN	L mm (inch)	G
1"	25	110 (4.33)	Rd 44 x 1/6"
1 1/2"	25	110 (4.33)	Rd 58 x 1/6"
2"	20	110 (4.33)	Rd 78 x 1/6"

Aseptic screwed gland SÜDMO with threaded socket W 601



DN	PN	L mm (inch)	D mm (inch)
1"	16	110 (4.33)	50.5 (2)
1 1/2"	16	110 (4.33)	64 (2.52)
2"	16	110 (4.33)	77.5 (3.05)

Schematics

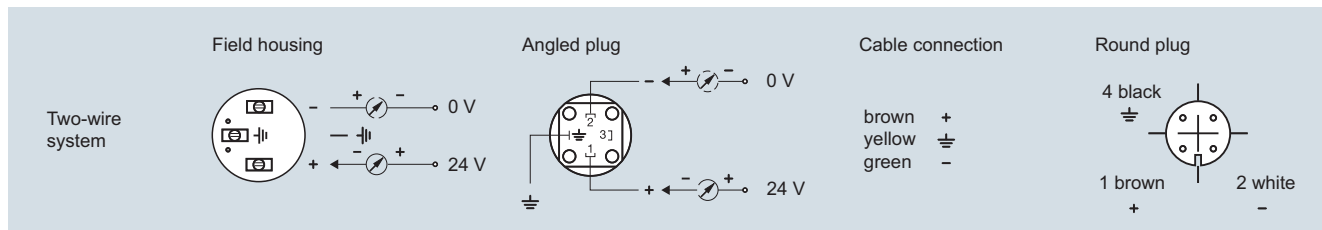

SITRANS P Compact, connection diagram