

### Features:

- polyethylene container with 55 litres capacity and up to 45 litres switching volume
- built-up grinder pump with robust, adjustable cutting system made of corrosion-resistant special alloy
- two mechanical seals with intermediate oil chamber
- pressure outlet flange DN 50 with flanged connecting bend and non-return ball valve 1 1/4" FPT
- inlets: 3 x lateral DN 100 and 1 x top DN 50/100
- additional connections 1 1/2" for manual diaphragm pump
- air vent DN 70 (Ø 75mm)
- operation temperature max. 55°C
- operating mode S3 - 25%
- protection grade IP 68 - fully submersible



### Application:

- pumping of domestic sewage from basement apartments or single-family houses for greater heads or long pressure pipes
- above-ground installation in frost-free rooms below the backflow level
- fits into manholes with a cover > Ø 590 mm

### Scope of delivery:

- pre-assembled lifting unit with 3,5 m connection cable to the motor and 3,5 m pneumatic tube to the control
- 90° pump connecting bend DN 50
- non-return ball valve 1 1/4" FPT
- flexible connection with tension clamps for ventilation pipe
- incl. ZPS1: comfortable, pneumatic level control with microcontroller, LCD plain text display for filling level, maintenance, operating hours, fault message and alarm signal in switchbox for indoor installation


### Product benefits:

- compact dimensions
- pre-assembled - connection pieces & non-return valve included
- comfort control unit included in delivery
- for long pressure pipes (DN 50)
- suitable for pressure drainage
- high delivery heads

### Technical data:

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	I <sub>n</sub> [A]	n [min <sup>-1</sup> ]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	PO	Weight [kg]
17473	400	2.100	1.700	3,7	2800	17,0	25,0	RP 11/4	64

### Characteristics:

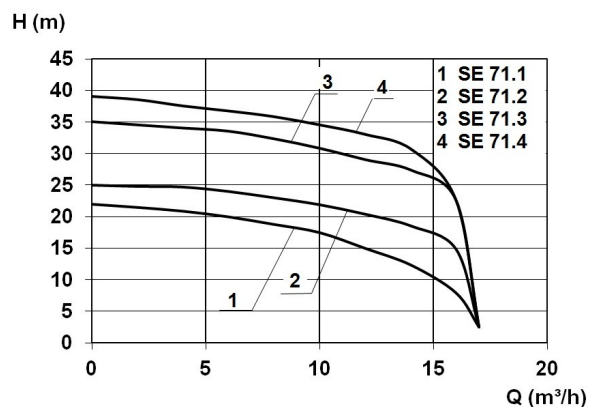

### Materials:

Seal motor:	mechanical seal
Seal pump:	mechanical seal

### Dimensions:

