

Kondensatventiler, reducerat genomlopp

170 serie, svetsning / svetsning, EN (DIN), DN 15-150, reducerat genomlopp

Ventilhus	DN 15-150 Stål, P235GH (1.0345)
Kula	DN 15-150 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 15-150 PTFE+GF
Spindel	DN 15-100 Rostfritt stål, X8CrNiS18-9 (1.4305) DN 125-150 Rostfritt stål, X17CrNi16-2 (1.4057)
Spindeltätning	DN 15-150 FFKM/EPDM
Manövrering	DN 15-150 Med förzinkat stål handtag



Funktionsvillkor


DN 15-150: -20 °C – +250 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

*) Ej för överhettad ånga

Läckageklass A (EN 12266-1)

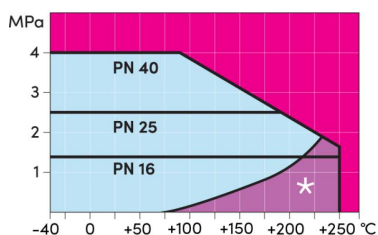

DN 15-150

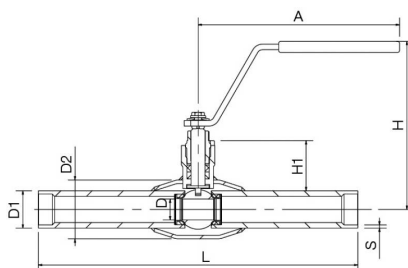

DN	PN	Product no.	RSK no.	A	D	D1	D2	H	H1	L	S	kg
15	40	170015X		147	10	21.3	33.7	116	33	230	2,0	0.7
20	40	170020X		147	15	26.9	42.4	120	34	230	2,3	0.9
25	40	170025X		147	20	33.7	48.3	122	33	230	2,6	1.0
32	40	170032X		147	25	42.4	60.3	126	32	260	2,6	1.4
40	40	170040X		147	32	48.3	70.0	131	34	260	2,6	1.6
50	40	170050X		147	40	60.3	76.1	138	35	300	2,9	2.2
65	25	170065	4512202	278	50	76.1	101.6	156	62	300	2,9	3.9
80	25	170080	4512203	278	65	88.9	121.0	169	68	300	3,2	5.1
100	25	170100	4512204	278	80	114.3	146.0	218	100	325	3,6	8.5
125	25	170125	4512205	400	100	139.7	177.8	253	101	325	4	15.2
150	25	170150	4512206	600	125	168.3	219.1	272	107	350	4,5	20.4