

X-injusteringsventiler, rostfritt stål, reducerat genomlopp

240X serie, X-serien, svetsning / svetsning, EN (DIN), DN 15-50, reducerat genomlopp

Ventilhus	DN 15-50 Rostfritt stål, AISI316L (1.4404)
Kula	DN 15-50 Rostfritt stål, AISI316L (1.4404), kompositflödesrör
Kultätning	DN 15-50 PTFE+GF
Spindel	DN 15-50 Rostfritt stål, AISI316L (1.4404)
Spindeltätning	DN 15-50 FPM/NBR
Mätuttag	DN 15-50 Självförlutande, rostfritt stål, X8CrNiS18-9 (1.4305) / EPDM
Manövrering	DN 15-50 med injusteringsratt




Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

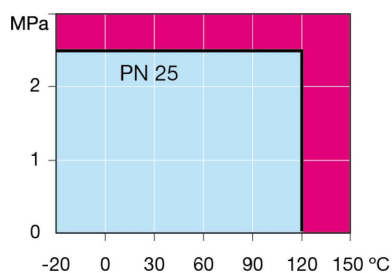

Ej för ånga

DN 15-50

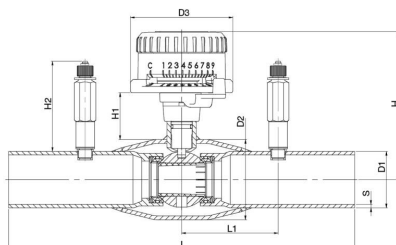

DN	PN	Product no.	RSK no.	D1	D2	D3	H	H1	H2	L	L1	S	kg
15	25	240015X	5495243	21.3	33.7	77.0	101	38.5	68	230	73	2	0.7
20	25	240020X	5495244	26.9	42.4	77.0	105	38	68	230	73	2	0.8
25	25	240025X	5495245	33.7	48.3	77.0	107	37	68	230	73	2	1.0
32	25	240032X	5495246	42.4	60.3	77.0	111	35	68	260	73	2	1.4
40	25	240040X	5495247	48.3	70.0	77.0	116	35	68	260	73	2.6	1.9
50	25	240050X	5495248	60.3	76.1	77.0	123	39	68	300	73	2.6	2.6

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mättdon, bland annat.