



	s141	s241	s441	s541	s641
	DN6	DN8	DN10	DN13	DN15
Slange indv. mm	ø6,4 ±0,3	ø8,2 ±0,3	ø9,5 ±0,3	ø12,7 ±0,3	ø15,5 ±0,3
Slange udv. mm (u/flet)	ø9,0 ±0,2	ø11,0 ±0,2	ø13,3 ±0,2	ø17,1 ±0,2	ø20,5 ±0,3
Flet	Rustfri				
Stribe (farve)	grøn				
Arbejdstryk	10 bar v/+90°C				
Temperatur	max. +90°C				
Flow (v/3bar) ca.	16 l/min.	28 l/min.	45 l/min.	60 l/min	96 l/min.
Godkendelser (norden)	DK-N-S-FIN				


## Standard\* fittings DN6

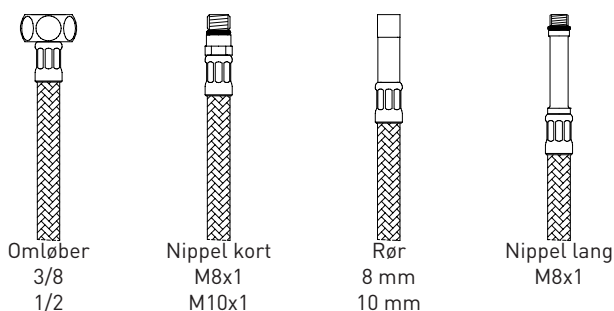


## Standard\* fittings DN10

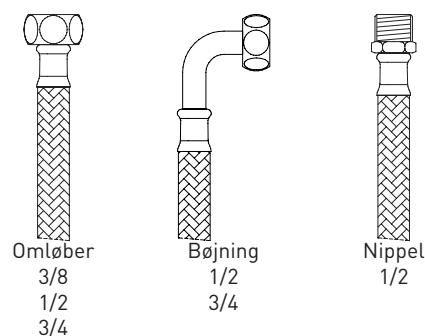


## Standard\* fittings DN8

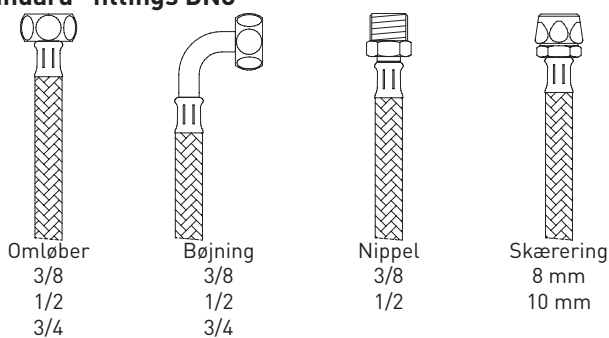

## Standard\* fittings DN13

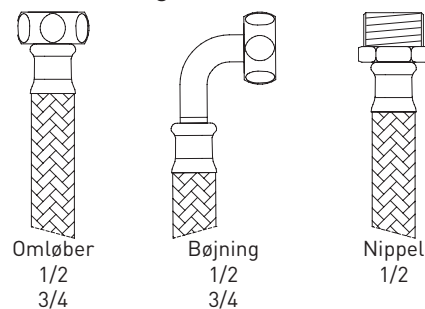

## Standard\* fittings DN15

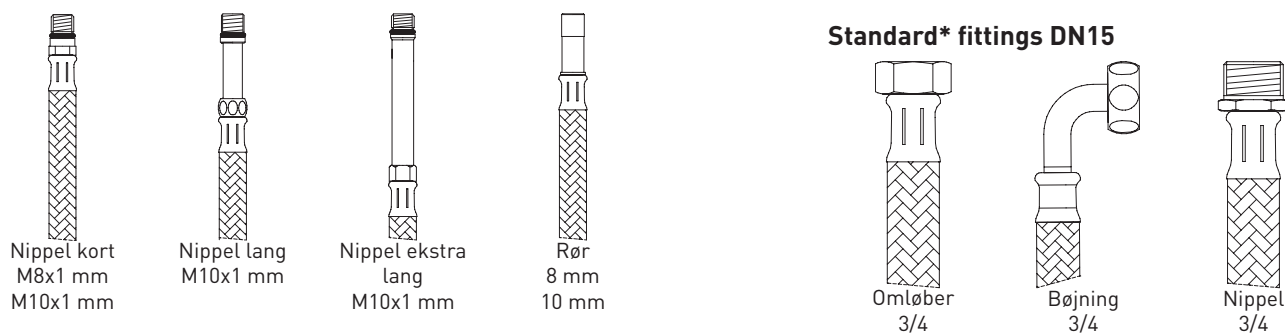

\* Kontakt os ang. andre muligheder

illustrationer er kun vejledende. Der tages forbehold for trykfejl.  
Opgivne data mv. kan ændres uden varsel.

1:1