
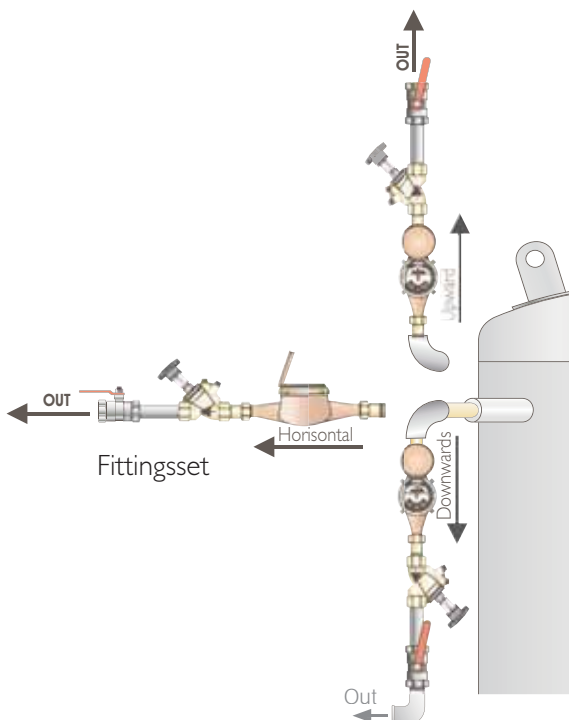


## Type 500/800/1000

Products	Art.no
Elysator T 500 (complete) Hot water (rockwool insulation)	10 01 54
Elysator T 500 (complete) Chilled water (armaflex insulation)	10 01 53
Flowmeter 1 1/2" Vertical	10 00 93
Flowmeter 1 1/2" Downwards	10 00 69
Airvent	10 00 00
Indicator /analog "builtin" model	10 00 78
Indicator (analog)"attached"	10 00 79
Anodes (1 set)	10 01 59
Ballvalves (inlet / outlet) 1 1/2"	10 01 24
Regulating valve 1 1/2"	10 01 18
Pump 3x440V - 60Hz	10 02 36
Start panel 3x440V - 60Hz - 1,6A	10 00 16

	T500	T800
Start up L/min	100	150
Norm L/min	40	60
Volume m <sup>3</sup>	120 m <sup>3</sup>	220 m <sup>3</sup>
Joining	1 1/2"	1 1/2"
Total Height	2270mm	2150mm
Diameter	600mm	800mm
Weight	300	400
Freight weight	350	450

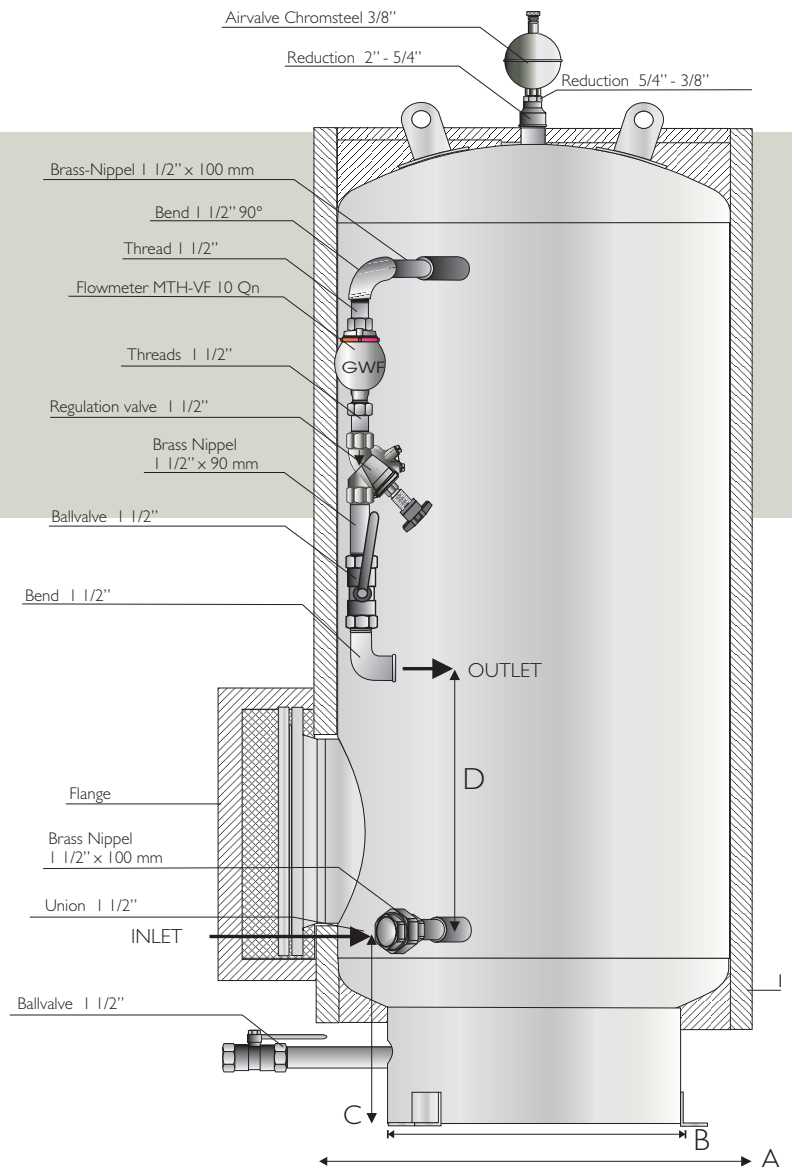

Products	Art.no	Art.no
ELYSATOR	T 800	T 1000
(complete) Hot water (rockwool insulation)	10 01 11	10 02 04
(complete) Chilled water (armaflex insulation)	10 01 22	10 02 05
Flowmeter 1 1/2" Vertical	10 00 93	10 00 19
Flowmeter 1 1/2" Downwards	10 00 69	10 01 09
Airvent 3/8"	10 00 00	10 00 00
Indicator /analog "builtin" model	10 00 78	10 00 78
Anodes hot water 1 set	10 01 61	10 02 25
Anodes chilled water 1 set	10 01 62	10 02 26
Ballvalves (inlet / outlet) 1 1/2"	10 01 24	10 01 24
Regulating valve 1 1/2"	10 01 25	10 01 25
Pump 3x440V - 60Hz	10 02 37	10 02 37
Start Panel 3x440V -60Hz- 1,6A	10 00 16	10 00 68