
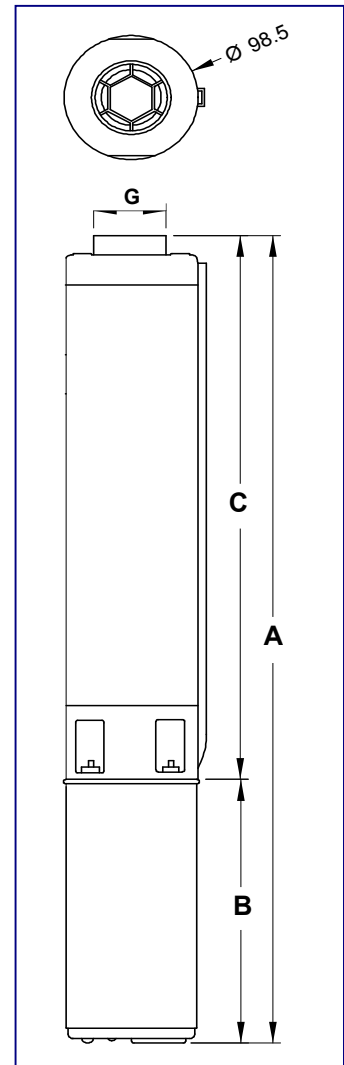


# Debe 4" undervattenpump typ GRB

Kapacitetsdiagram vid 2850 rpm

Testad enligt ISO 9906

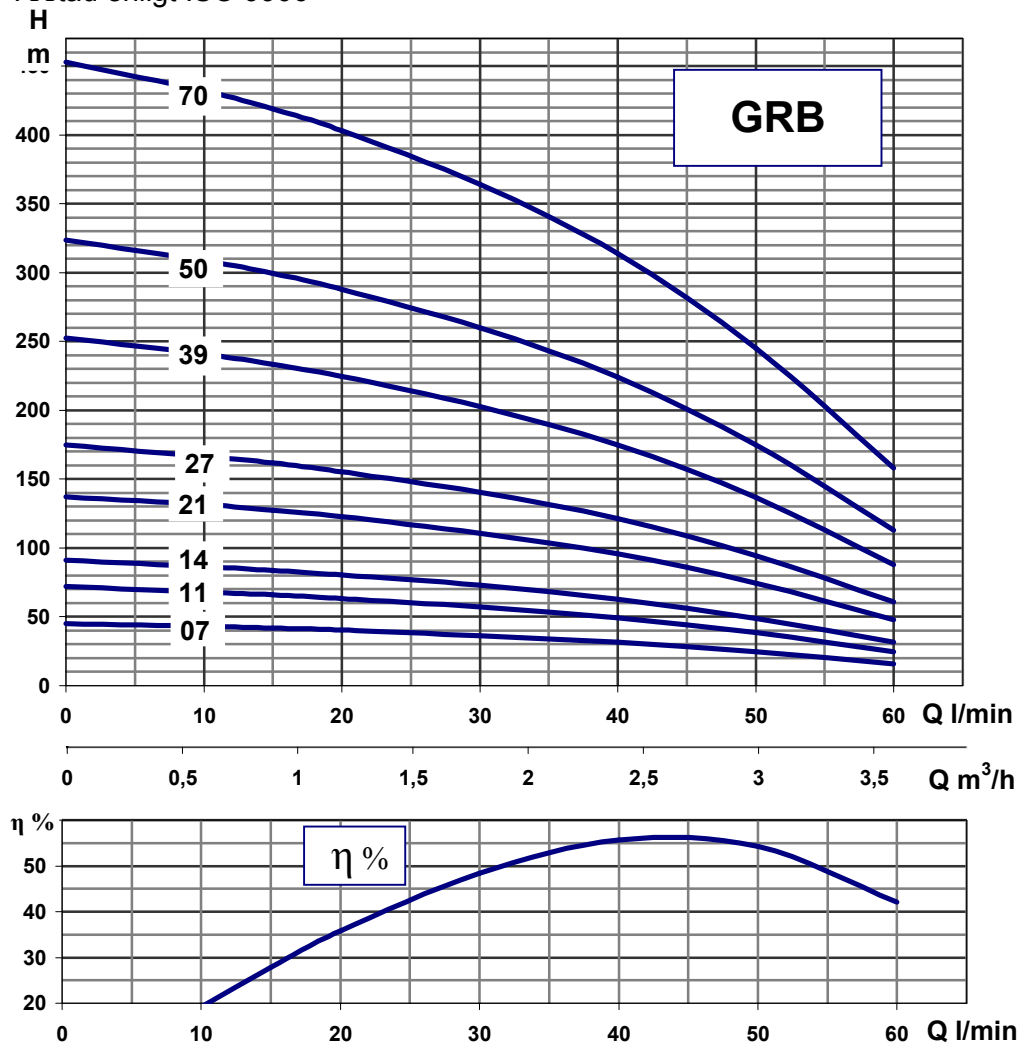

MODELL	Spänning Volt	Motor		Kondensator		Q - Flöde											Måttabell								
		kW	A	uF	V	m³/h	0	0,6	0,9	1,2	1,8	2,4	3	3,6	l/min	0	10	15	20	30	40	50	60	A	B
GRB 7M GRB 7	1~220/230 3~380/415	0,37	3,3 1,1	16	450	45	43	42	40	36	31	25	16	536	228	308	1" 1/4								
GRB 11M GRB 11	1~220/230 3~380/415	0,55	4,3 1,5	20	450	72	68	66	63	57	49	39	25	635	253	382	1" 1/4								
GRB 14M GRB 14	1~220/230 3~380/415	0,75	5,7 2,0	35	450	91	86	84	81	73	63	49	32	720	283	438	1" 1/4								
GRB 21M GRB 21	1~220/230 3~380/415	1,1	8,4 2,8	40	450	137	131	127	123	111	96	75	48	915	307	608	1" 1/4								
GRB 27M GRB 27	1~220/230 3~380/415	1,5	10,7 3,9	50	450	175	167	162	155	140	121	95	61	1058	339	719	1" 1/4								
GRB 39M GRB 39	1~220/230 3~380/415	2,2	14,7 5,5	70	450	252	241	233	225	203	175	137	88	1419	437	982	1" 1/4								
GRB 50	3~380/415	3	13,5 7,5			324	309	299	288	260	224	175	113	1704	477	1227	1" 1/4								
GRB 70	3~380/415	4	17,3 9,9			453	432	419	403	364	314	245	158	2222	543	1679	1" 1/4								