

ELECTROFUSION SOCKET

Systems:

aquatherm green pipe,
aquatherm blue pipe,
aquatherm lilac pipe

Material:

Fusiolen® PP-R

Standard:



DIN 16962, DIN EN ISO 15874

Colour:

green

Notice

do not use with 160 mm - 250 mm fittings
*do not use with aquatherm blue pipe MF OT

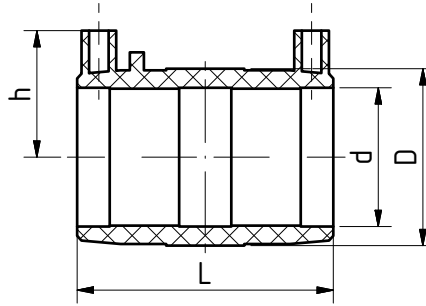

SDR	Art.-No.	Dimension d [mm]	L	h	D	Weight [kg]	System	PU	Box unit
<i>Electro-socket welding</i>									
6 7,4 9 11 17,6	17208	20	70,00	36,00	31,50	0,049	• • •	1	
	17210	25	78,00	38,50	36,50	0,057	• • •	1	
	17212	32	80,00	42,50	45,00	0,077	• • •	1	
	17214	40	92,00	47,00	54,00	0,103	• • •	1	
	17216	50	103,00	52,00	65,00	0,142	• • •	1	
	17218	63	118,00	58,00	81,50	0,239	• • •	1	
	17220	75	130,00	64,50	96,00	0,347	• • •	1	
	17222	90	145,00	72,00	113,50	0,501	• • •	1	
	17224	110	160,00	82,50	139,00	0,821	• • •	1	
	17226	125	172,00	90,00	156,00	1,097	• • •	1	
	17230*	160	186,00	109,50	197,00	1,754	• • •	1	
17234*	200	210,00	134,00	243,00	3,625	• • •	1		
17238*	250	250,00	170,00	315,00	7,142	• • •	1		

L