

### Channel Nut NT HZ 41

Group: 1314


#### Application

For Channels MS 41.

#### Technical Data

	M8	M10	M12	M16
Tightening torque 8.8 <sup>1)</sup> [Nm]	25	40	80	80

<sup>1)</sup> Using lower steel classes, the value are to be reduced accordingly.

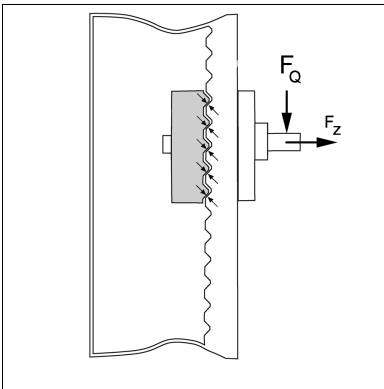

Channel thickness [mm]	M8 FZ ≤ [kN]	M10 FZ ≤ [kN]	M12 FZ ≤ [kN]	M16 FZ ≤ [kN]	M8 FQ ≤ [kN]	M10 FQ ≤ [kN]	M12 FQ ≤ [kN]	M16 FQ ≤ [kN]
1.5	3.0	6.0	7.5	7.5	4	5.5	7.5	6
2.0	7.5	7.5	10	10	4	5.5	9	6
2.5	8.5	8.5	11	11	4	5.5	9	6
3.0	8.5	8.5	13	13	4	5.5	9	6

Note: The permissible load capacities of the channels are to be respected.

Material: Steel, cold-forged, electro-galvanised

Type	W [kg]	Quantity [pack]	Part number
HZ 41-M8	0.04	50	<b>151935</b>
HZ 41-M10	0.03	50	<b>151944</b>
HZ 41-M12	0.06	50	<b>182288</b>
HZ 41-M16	0.05	50	<b>182297</b>